


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT. <sup>(A)</sup>
2. MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [1112 NEWTONS]
3. DIMENSIONS IN [ ] ARE MILLIMETERS.
4. NYLON 11 COATED BODY - COLOR BLACK  
THICKNESS TO BE: .003/.005 [.076/.127] PER SIDE.
5. MATERIAL: 316 STAINLESS STEEL, WITH NYLON 11 COATED BODY.
6. TOLERANCES: .X = ±.030 [.8]  
.XX = ±.020 [.5]  
.XXX = ±.010 [.25]

PANDUIT PART NO.	MAX. BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
MLTC2H-LP316	2" [51]	7.9" [201]
<sup>(D)</sup> MLTC2.7H-LP316	2.7" [69]	10.15" [258]
MLTC4H-LP316	4" [102]	14.3" [362]
MLTC6H-LP316	6" [152]	20.5" [521]
<sup>(C)</sup> MLTC8H-LP316	8" [203]	26.8" [679]
MLTC10H-LP316	10" [254]	33.0" [838]

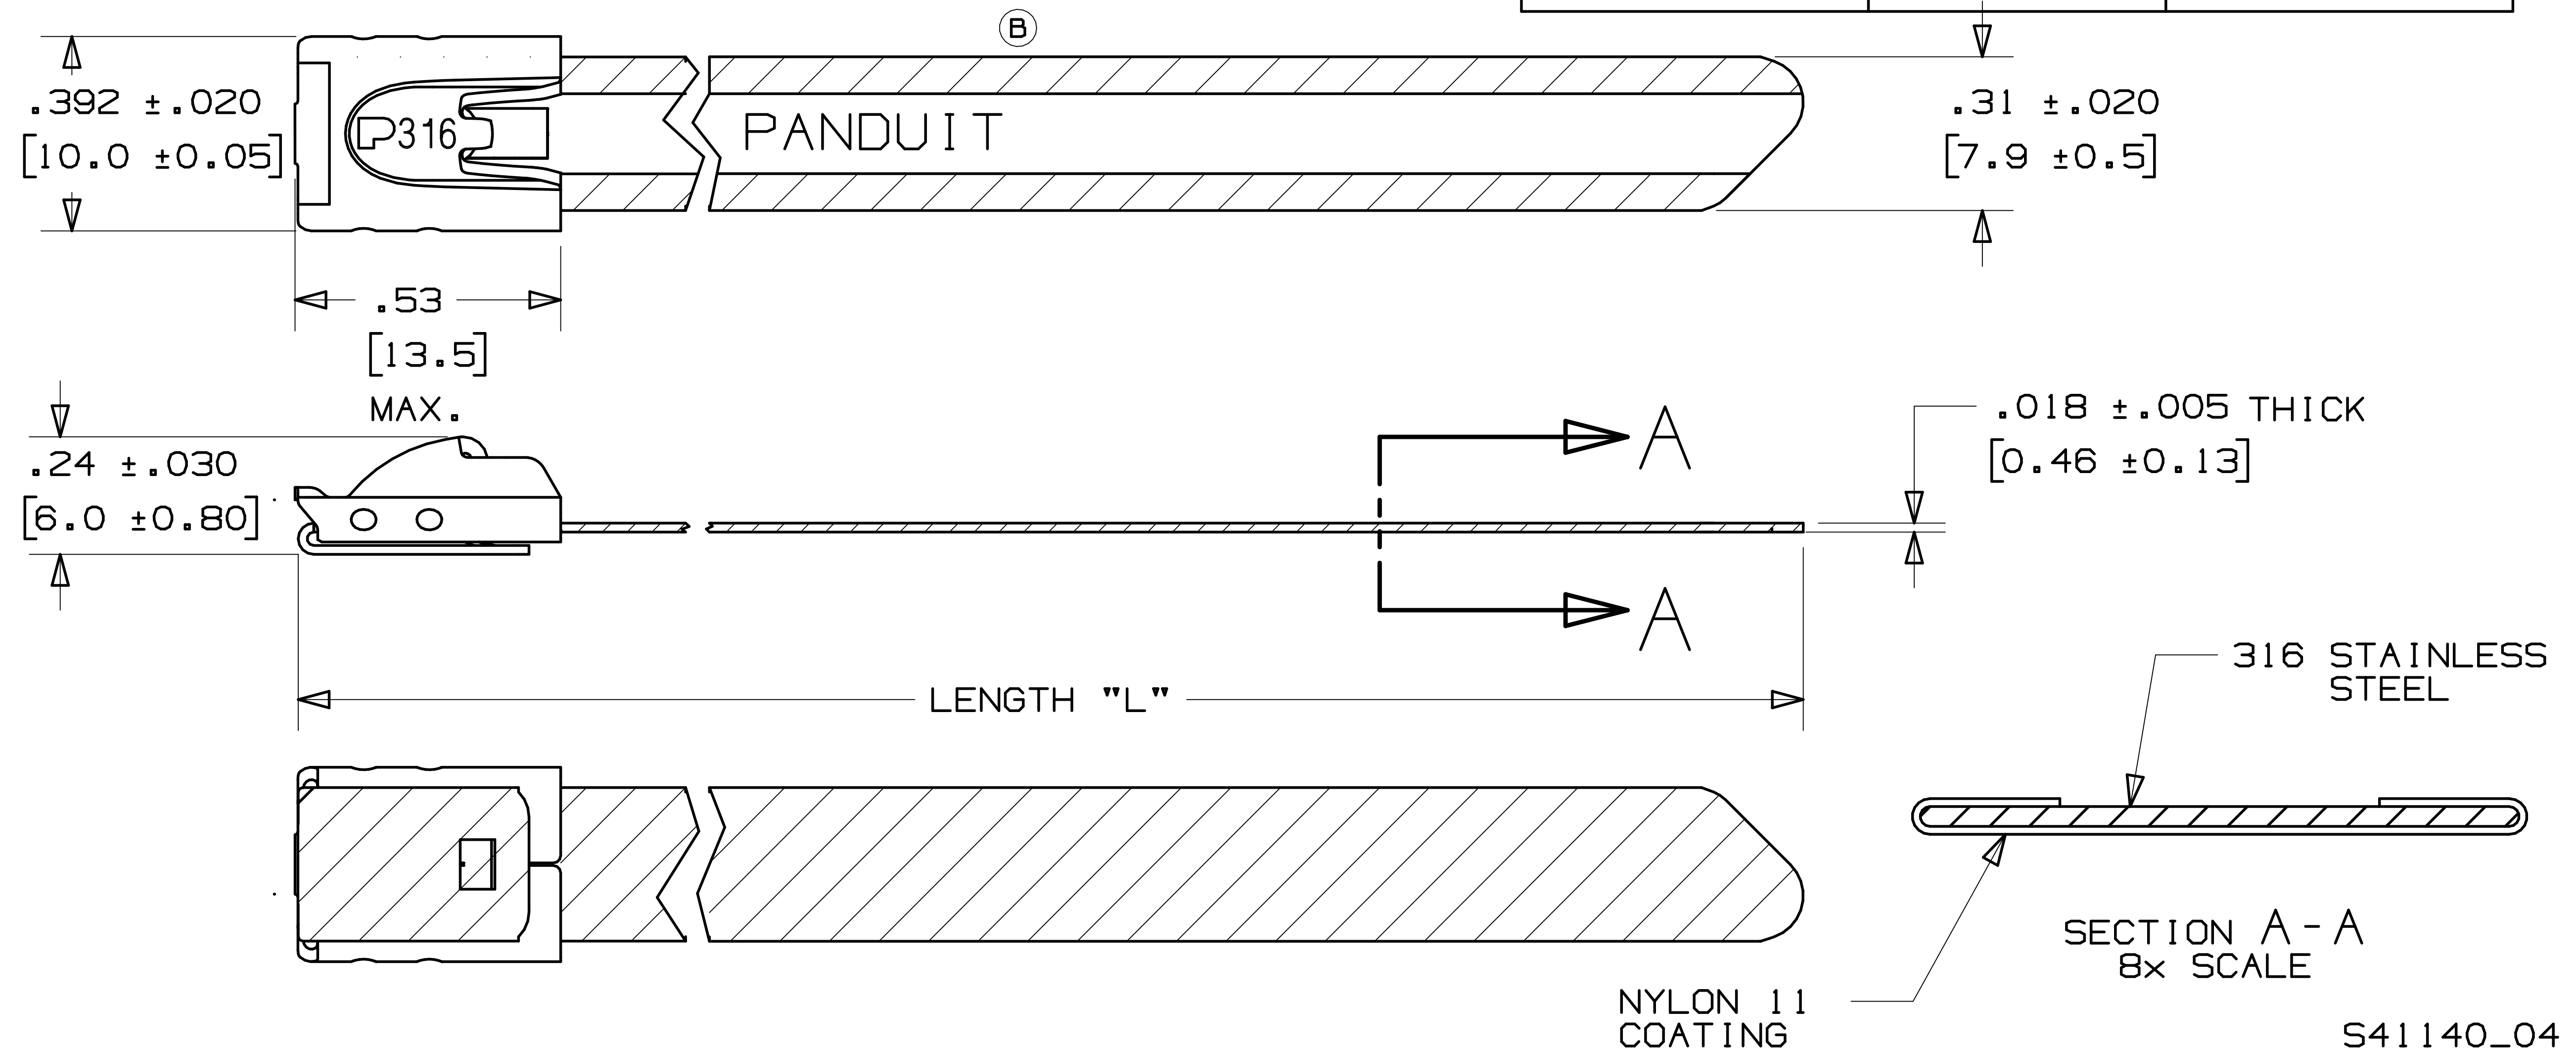

							<b>PANDUIT</b> CORP.      TINLEY PARK, ILLINOIS				
04	11/05	JMMR	EJD	<sup>(D)</sup> ADDED PART NO. MLTC2.7H-LP316 TO TABLE	SS00112	---	---	SELECTIVELY COATED METAL LOCKING TIE HEAVY SERIES WITH NYLON 11 COATED BODY			
03	11/04	JAMB	EJD	<sup>(C)</sup> ADDED PART NO. MLTC10H-LP316 TO TABLE	12176	CCH	JJB				
02	10/03	JAMB	DPN	<sup>(B)</sup> REMOVED "316" DESIGNATION FROM PANDUIT I.D.	11292	CCH	JJB				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY JAMB	CHK'D DPN	SCALE 2x	DRAWING NO. S41140