


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NO.	MAX. BUNDLE DIA [mm]	LENGTH ±.1 [2]
MSC2W38T15-L6	2" [51]	11.8" [300]
MSC4W38T15-L6	4" [102]	18.0" [457]
MSC6W38T15-L6	6" [152]	24.4" [620]
MSC8W38T15-L6	8" [203]	30.7" [780]
MSC10W38T15-L6	10" [254]	37.0" [940]

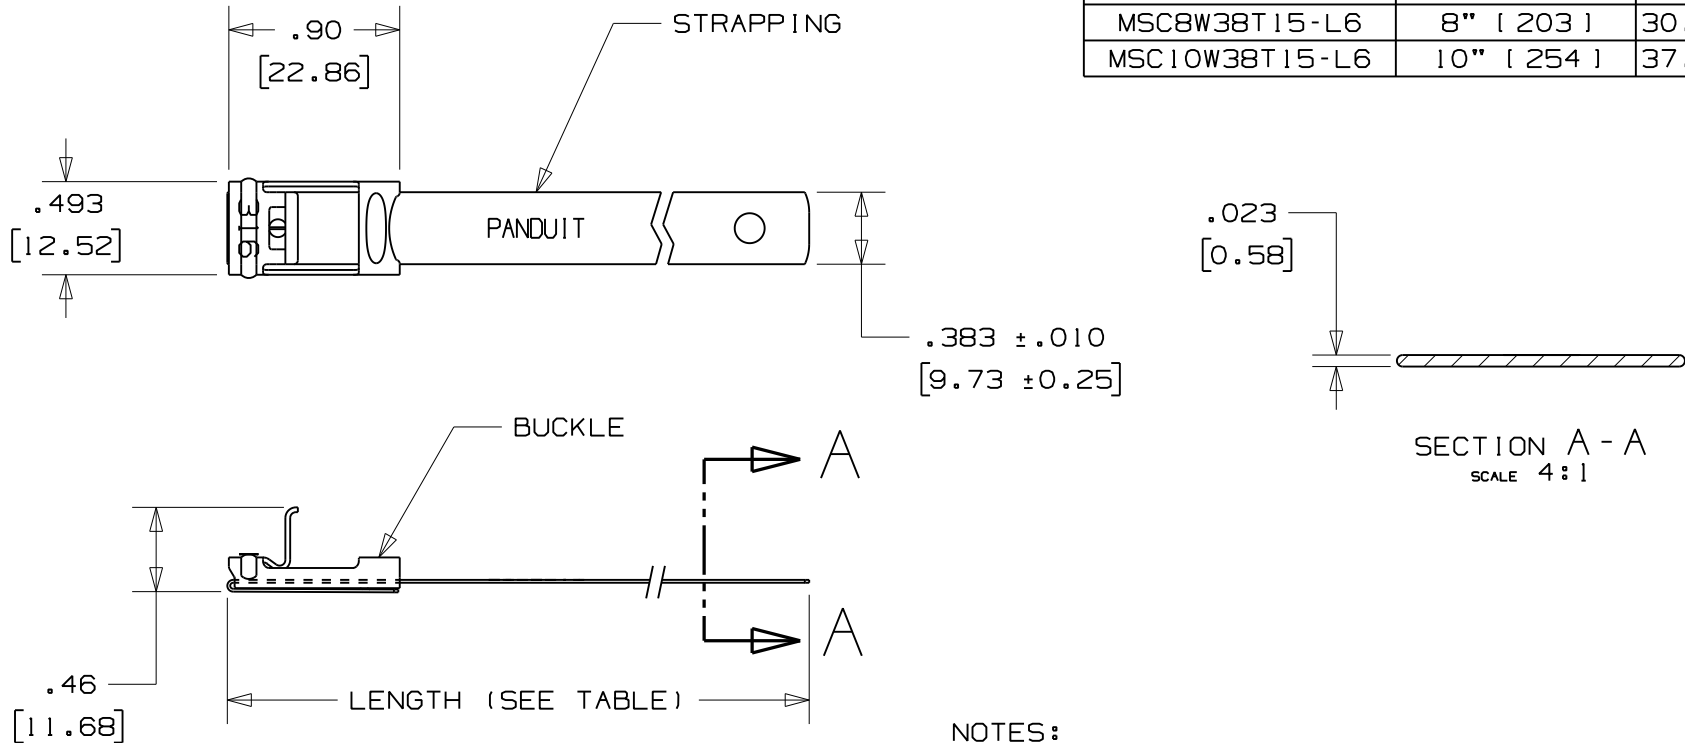

NOTES:

1. APPLICATION TOOLS: BT2MS75, BT2HT
2. ALL DIMENSIONS IN BRACKETS [] ARE MILLIMETERS.
3. BASE MATERIAL: 316 STAINLESS STEEL.
4. 100% COATED WITH BLACK NYLON OR POLYESTER.
5. COATING THICKNESS: .003/.005(.076/.127) PER SIDE.
6. TOLERANCES (UNLESS OTHERWISE SPECIFIED):
 - .X ± .03 [.8]
 - .XX ± .02 [.5]
 - .XXX ± .007 [.18]

N41167BS_DC/01A

01A	10/08	JAMB	SKB	ORIG CAD FILE SPEC WAS S41167_01. NOTE 1: APPLICATION TOOL BT1HT REPLACED BY BT2HT
01	10/03	BRH	EJD	RELEASED
REV	DATE	BY	CHK	DESCRIPTION

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

COATED METAL STRAPPING
.375" [9.52] WIDE
CUSTOMER DRAWING

DRAWN BY	CHK'D	SCALE	DRAWING NO.
BRH	EJD	FULL	N41167BS_DC