


# ANALOG SIGNAL CONDITIONING

# ANALOG SIGNAL CONDITIONING

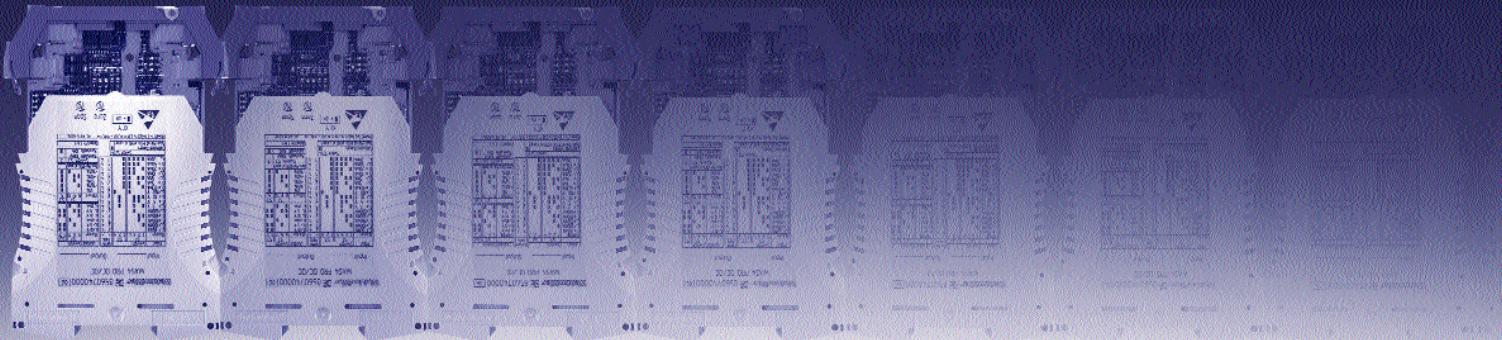

WAVESERIES MICROSERIES MCZ SERIES  
WAVESERIES MICROSERIES MCZ SERIES  
WAVESERIES MICROSERIES MCZ SERIES

## PRODUCT INFORMATION

When good enough just isn't good enough

**Weidmüller** 

<b>Table of contents</b>	<b>Page</b>
Preface	3
Description of technical data	4
Examples of application	7
Analog Signal Conditioning - overview	8
 <b>WAVESERIES and the benefits</b>	 12
 <b>MCZ / MICROSERIES and the benefits</b>	 13
DC Signal Conditioners	14
 <b>WAVEANALOG PRO DC/DC and the benefits</b>	 28
DC/DC Signal Conditioners	30
DC Alarm Conditioners	32
PT100 / RTD / Thermo - Signal Conditioners	35
Frequency Signal Conditioners	46
Bridge Signal Conditioners	49
Interface Converter	50
 <b>Current monitoring up to 60A ac/dc</b>	 51
Current monitoring	52
Voltage monitoring	56
 <b>Power supply</b>	 57
Dimensions / Accessories	58


## Preface

The real world can be measured in many ways, for example, via temperature, humidity, air pressure and so on. The parameters of these different physical quantities change continuously.

Elements that check the status and changes in status of a given environment, and then report on this changed environment, must reflect these continual changes. Within the framework of industrial monitoring tasks, the status of an environment is monitored using sensors.

Sensors have the task of providing signals that enable connected evaluating and monitoring installations to draw detailed conclusions concerning the status of, for example, a production process. The sensor signals reflect the continuous changes in the monitored range. The signals can be in analog or digital form; which means in normal cases, an electrical voltage or current value is produced that corresponds, in proportion, to the monitored physical quantities.

Increasing automation with the intention of achieving or maintaining a certain status makes the processing of analog values increasingly important. This is also true of fields beyond those where this has been necessary and standard for a long time, for example, in processing technology in the chemical industry. Electrical signal values are standard within the framework of this processing technology. Current

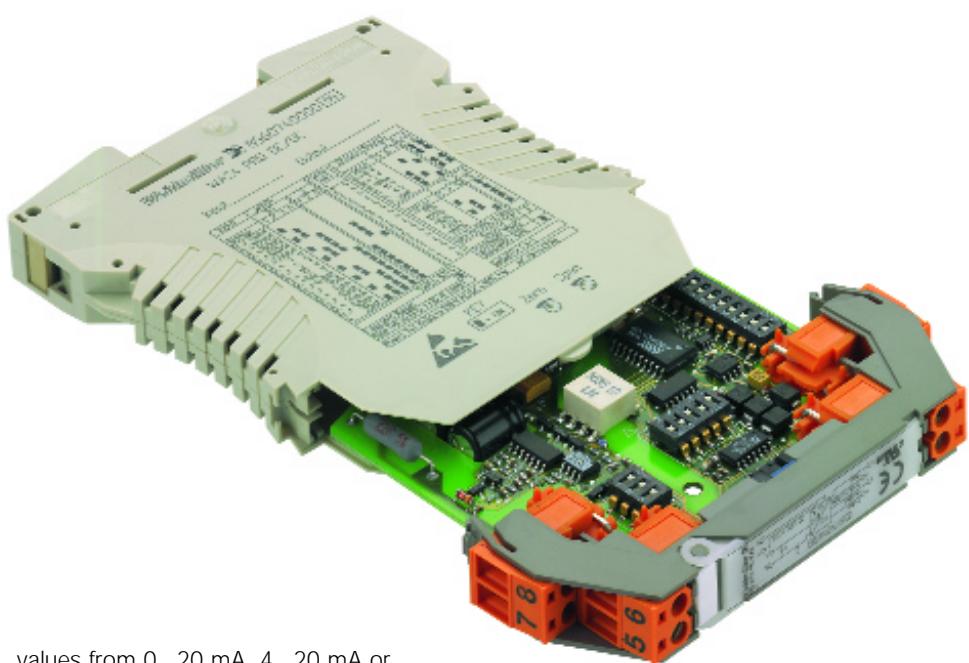


values from 0...20 mA, 4...20 mA or voltage values from 0...10 V have been introduced as sensor output values for differing physical quantities.

Weidmüller is supporting the need for increasing automation with the processing of these analog signals and is offering a wide range of products that are designed to deal with the demands required when handling sensor signals. This means units are made available for standard signals (0...20 mA, 4...20 mA, 0...10 V) that generate output signal values proportional to the variable input signals, and at the same time enable the protective


separation of, for example, sensor circuits from measured circuit.

This protective separation is particularly important to avoid mutual interference of multiple sensor circuits, for example,

ground loops in interlinked measurement circuits. The wide range of products includes all functions for converting, separating and monitoring signals. The different designs in connection with the respective function covers practically all applications in industrial measurement technology.

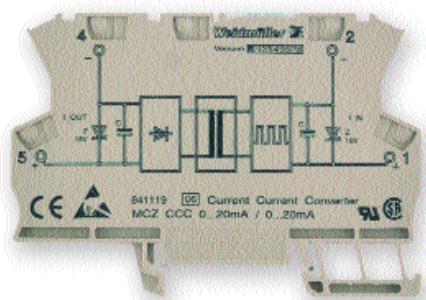

With these new products, Weidmüller is offering the option of taking into account the demands of modern automation technology by incorporating analog signals. These products guarantee an elementary function between signals from the field and the local control system. The mechanical characteristics of these products correspond to those of the well-known Weidmüller products and are part of an ongoing concept. The signal conditioners can be used together with other Weidmüller products. They have been electrically and mechanically designed so that only a minimum of wiring and maintenance costs are required.

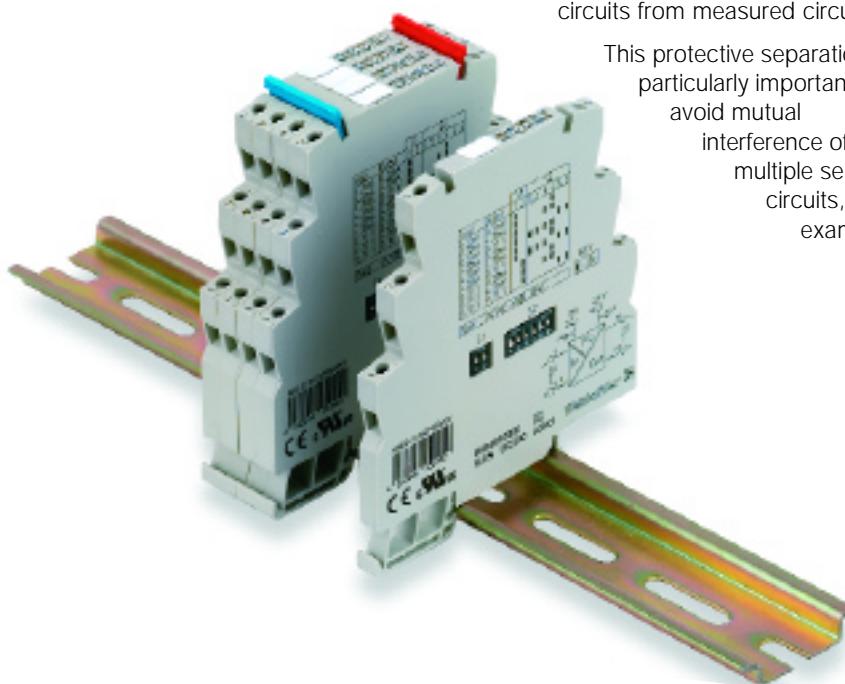

## Description of technical data




### Common Mode Noise Elimination

- Generally, signals emitted by sensors have low levels and are thus susceptible to capacitive and inductive interference, such as those generated by motors, frequency changers and other change processes.

This noise contains the measuring value and frequently destroys expensive analog I/O cards in the control electronics.

Through the utilisation of analog signal isolators this interference, which usually affects both signal lines in common mode (push push), is effectively eliminated through the zero potential input.

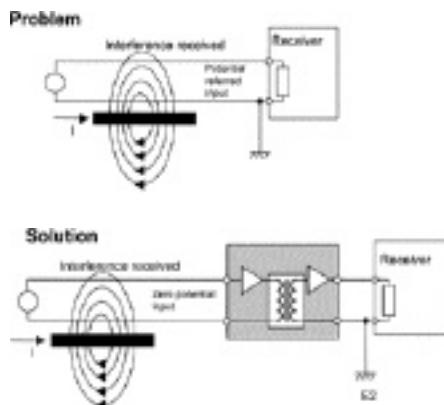

### Active Isolator / Passive Isolator




- Active isolators draw their power supply from a separate supply terminal to ensure that they can operate perfectly. Depending upon the applications the input, output and additionally the power supply are isolated from each other. Only one supply is required for 3-port isolation. However, it is isolated from the input and output circuits. Thus even in the event of a short circuit, surge voltage or reverse polarity, the downstream control electronics cannot be damaged. Isolating the signals between the input and output can be conducted either optically or by transformer barrier depending upon the transfer rate. Active isolators are non interacting, i.e. a change in the load does not exert any influence on an input circuit.

- Passive isolators generate the current required for the supply from the measuring signal. The current required internally is so small that transfer problems do not occur here.
- The feed can be effected from either the input or the output side. Isolation is by transformer barrier. The advantages are: cessation of network influences, outstanding accuracy, low signal delay and low potential requirement. Passive isolators are not non interacting; a change in load in the output circuit will influence the input circuit.

the output circuit as well as the two auxiliary voltages from each other. Depending upon the isolator design and the observed isolation data one refers here to base isolation (galvanic isolation) or safe separation. ① For current signals, 4...20 mA input current loop fed modules are available. An additional auxiliary voltage for the input circuit is not required with here. ② By connecting the input and output side voltage supplies, the 2-port isolation can be converted to operate as a simple signal converter. This is of particular interest where isolation is not required for an application, but a signal conversion has to be performed.

### Ground Loops

- The voltage supply's secondary side is earthed for the purpose of setting up fast and secure ground loop monitoring. If an analog signal is fed in from a separate voltage supply or if the sensing device itself is earthed, then transient currents will flow between the ground potentials across the interconnected ground connectors, which in turn corrupts the measuring signal. Analog signal isolating amplifiers prevent this form of measuring signal corruption and influence.

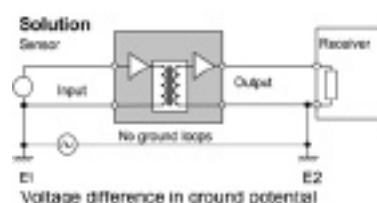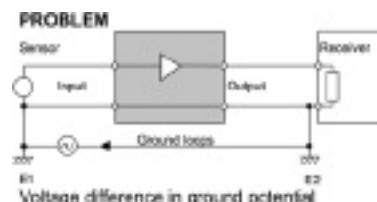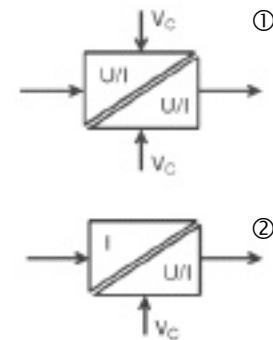

### 2-port Isolation


- The simplest form of analog signal isolator is that of 2-port isolation. It serves to isolate the input circuit from

### 3-port Isolation

- 3-port isolation is the most universal form of signal isolator
- An optical coupler or transformer isolates the input from the output circuit. Together with the clearance and creepage distances it serves to define the isolation level. For example, the input signal is converted by means of pulse-width modulation into a frequency signal and demodulated again on the output side to form an analog value. An amplifier then generates a standardised analog signal. A galvanic isolated DC/DC converter feeds the input and output circuit with a potential free supply voltage. It too determines the isolation level through its data, air and creepage distances. In the case of these three isolation paths

## Description of technical data

(input/output, input/auxiliary voltage, output/auxiliary voltage) one refers to 3-port isolation.

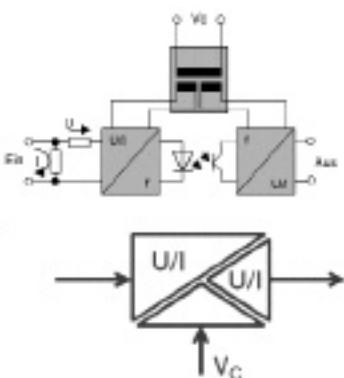

### Temperature Signal Measuring Method

- Measurement using resistors (RTD)
 


When measuring with temperature-dependent resistors a current of approx. 1.5mA is passed through the resistor from a constant current source in the signal converter. An operational amplifier is used to measure the potential drop at the resistor (2-wire circuit). In order to take account of lead length, the voltage drop is measured at the return conductor and calculated with double the value (3-wire circuit). This thus simulates the wire resistances from the feed and return lines.

Accurate measurements are achieved by separately measuring the voltage drop at the feed and return lines (4-wire circuit). The values for the supply lines are calculated against the measured value.

### Temperature Signal Measuring Method


- Measurements using thermocouples
 

When conducting measurements using




thermocouples the voltage that is generated when two differently alloyed metals come into contact with each other is measured. A differential amplifier is then used to recondition the signal. The easiest (and thus the most cost effective) method of subsequent processing is conducted by means of an amplifier circuit, which converts these

signals into standard signals. High-end components process the measuring signal using a microprocessor, which simultaneously reconditions the signal (filtering, linearization).

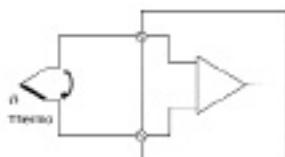

### Cold Junction Compensation For Thermocouples

- Recording temperatures by using thermocouples encounters the problem of a thermal voltage forming at the clamping terminals on the signal converter on account of the different materials in the conductors and bus bar. This voltage then counteracts the thermal element's voltage. In order to compensate for the error to the measured value which arises here, the temperature is measured at the clamping terminal. The microprocessor in the signal converter reads the value measured there and calculates it against the measured value.

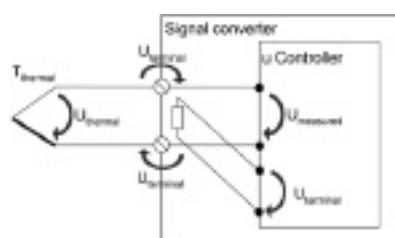

This procedure is known as cold junction compensation.


$$\begin{aligned} & \text{Voltage at the measuring point } (V_{\text{meas}}) \\ & + \text{Voltage at the terminal } (V_{\text{terminal}}) \\ & = \text{Voltage at the thermocouple } (V_{\text{thermo}}) \\ \Rightarrow & \text{Temperature at the thermocouple } (T_{\text{thermo}}) \end{aligned}$$

### Linearisation

- Temperature-dependent components do not normally have linear characteristic curves. To ensure that further processing can take place with the necessary accuracy, these characteristic curves have to be linearised to some extent.
- The graph showing measurements of thermocouples, in particular, reveals significant deviations at some points from the "ideal graph". As a consequence, the signal which has been measured is worked up by a

microprocessor. The microprocessor compares the value measured with the characteristic curve for the thermocouple in its memory and calculates the corresponding value on the "ideal characteristic curve". At the output, it supplies the latter to an amplifier, which produces the analog value in linear form. The output stage converts this into a standardised value or into a switching output with a switching threshold.


The linearisation of PT100-elements can be undertaken via simple amplifier stages. The first stage corrects the peak value of the graph of the measurements. The deviation at the end of the graph resulting from this is corrected by a second stage. The under- and over-shooting generated in this way is very slight and is covered by the tolerance for the module.

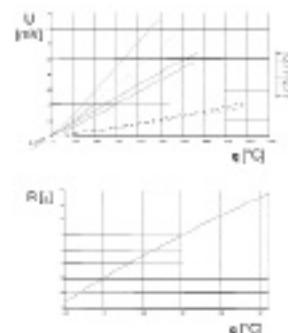

### Current Measurement Using A Measuring Transformer

- Transformer principle Each conductor through which current flows is surrounded by a magnetic field H, the intensity of which is proportional to the current. The field, which is bundled in a magnetic core, generates a magnetic flux B, through which suitable sensors are used to measure current. Converters with transformer-type couplings are used to establish the most cost effective measurement method for simple sinusoidal currents. The current to be measured flows directly through the measuring transformer's primary winding.

The secondary winding supplies the measuring electronics with a

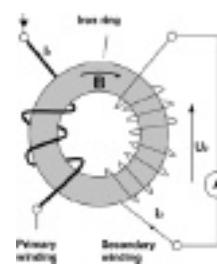


## Description of technical data

proportional current signal. Because of power loss this method of measuring current is limited to smaller currents up to 5A. These converters react sensitively to peak loads and therefore have to be fused on the primary winding side.

### Measuring Current Using A Hall-type Sensor

- Hall-type sensor principle  
Hall-type sensors also measure the magnetic flux  $B$  and supply a proportional voltage at the measured output, which is then reconditioned to form a standard signal by an amplifier

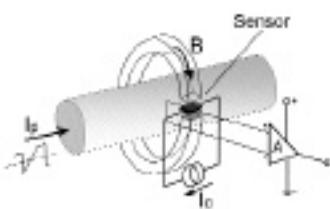


circuit.

- Components with Hall-type sensors are ideally suited to measuring higher currents, as any possible high residual currents from motors or peak loads cannot damage the component. Additionally, they are also ideal for measuring direct and alternating currents of various curve shapes.

### Root Mean Square Measurement / Crest Factor

- The root mean square value (r.m.s) of a sinusoidal shaped alternating current is the value, which in an ohmic resistor converts the same (effective) output as that of an equal sized direct current.
- Non sinusoidal shaped signals can only be measured with "True RMS" capable devices and/or further processed.

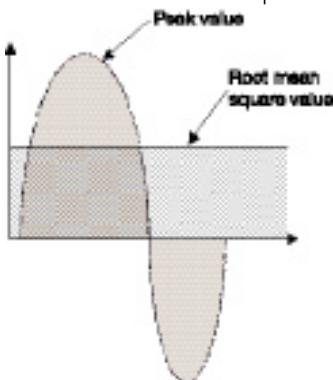

- True RMS = True root mean square
- Root mean square measurement is required where the (effective) output content of alternating voltages or currents are to be measured or evaluated.
- The crest factor indicates the ratio of the crest factor to the root mean square value.

### Load / Load Resistor

- The load is a load resistor on the output side of a measuring transducer or isolating amplifier. For current outputs the load is generally 500 ohm. Voltage outputs usually have a 10KOhm load.

### Galvanic Isolation / Safe Separation

- Galvanic isolation is understood to mean an electrical isolation between the input and output circuit and the circuit's supply voltage. It can be set up either optically using an opto coupler or with a transformer. The isolation serves to safeguard the measuring circuit against damage and to eliminate ground loops, which could cause the measured signal to be corrupted.
- Safe separation is specified under the German DIN VDE 0106 Section 101 standard. This fundamental safety standard is intended to safeguard persons against hazardous body currents and describes the basic requirements for safe separation in electrical operating equipment. Thus, for instance, the voltage supply of 50V ac/ 120V dc as under 50178 may not be exceeded. If this voltage is exceeded a reinforced or double insulated and thus an increase in the clearance and creepage distances is stipulated.

### Cut-off Frequency

- Cut-off frequencies indicate the dynamic transfer characteristic of an isolation amplifier.
- The given frequency is the (-3dB) limit, at which a distinct change occurs to the signal.
- An increased cut-off frequency leads to a transmission of higher-frequency alternating components, which corrupts the required signal.

### Hysteresis

- Hysteresis indicates the percentage difference between the input and output points of a switching contact. It should not be lower than a given minimum value, as otherwise a specified chase can no longer be implemented.

### Broken-wire Detection

- When measuring transformers with broken wire detection the input signal is monitored permanently. In the event of a fault (broken wire) the output signal exceeds its rated range. The downstream control circuit can then analyse the fault case.

### Response Time

- Response time refers to the change in output signal for an input signal jump(10...90%). It is directly related to the cut-off frequency (inversely proportional).

### Accuracy / Temperature Coefficient

- Accuracy describes the capability of a measuring device to deliver a measured value as accurately as possible. It relates to the end value and is given for ambient temperature (23°C).

Example:

An RTD is given with an accuracy of 1%. The measuring range is set to 0-200 °C. The expected effective error of:

$$200 \cdot 1\% = \pm 2K$$

applies across the entire measurement range.

- Temperature coefficient describes the deviations in accuracy of the measuring devices dependent on the ambient temperature. It is given as a % or in parts per million / Kelvin (ppm / K).

Example:


An RTD with an accuracy of 1% and a measuring range of 0-200 °C has a temperature coefficient of 250 ppm / K. If the device is operated at +40°C, it will then contribute the following to an expected absolute error:

$$((40^\circ\text{C} - 23^\circ\text{C}) \cdot 250\text{ppm/K}) + 1\% \cdot 200\text{K} \\ = \pm 2.85K$$

across the entire measurement range.


## Examples of application

### Magnetic – Inductive flow measurement

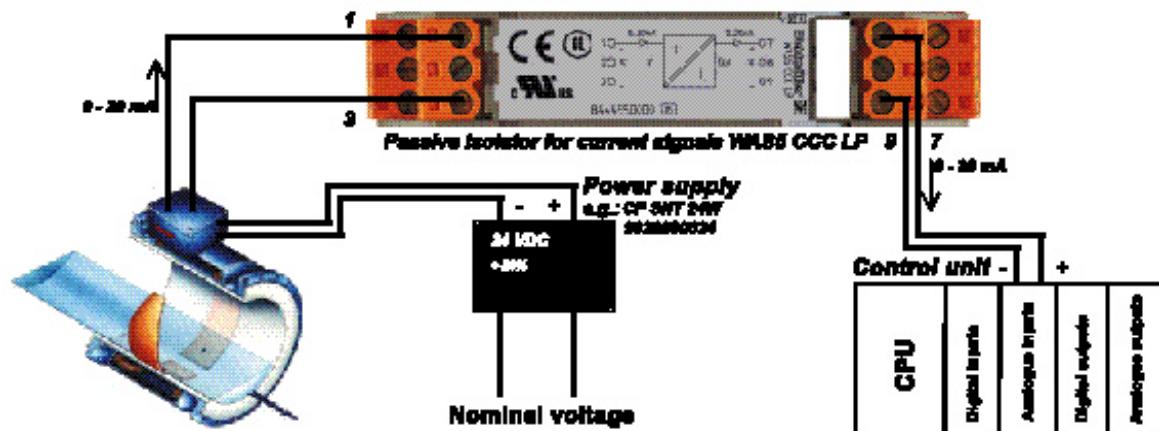


Magnetic – Inductive flow measurement

### Level measurement with microwaves

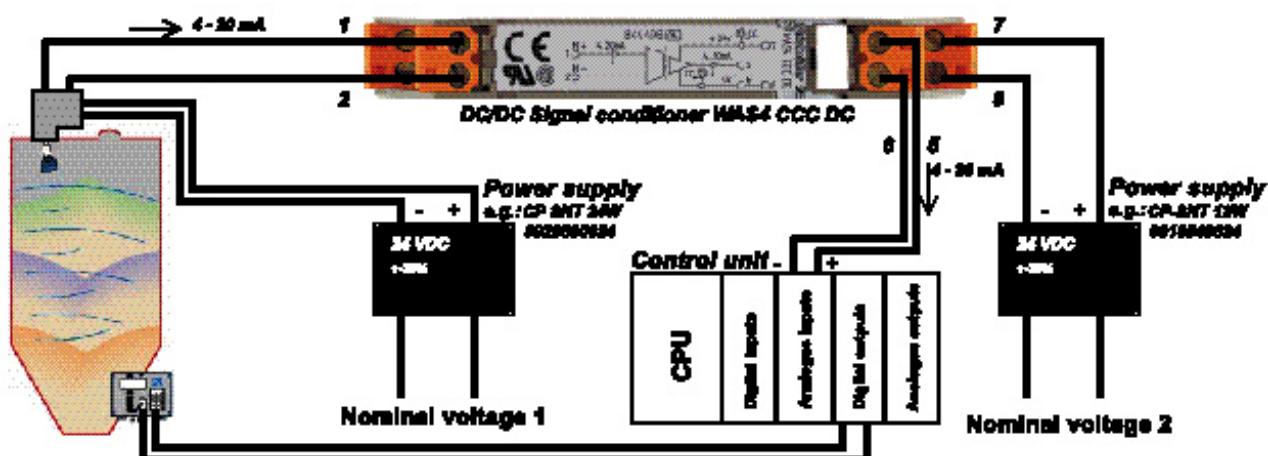

### Wind speed measurement

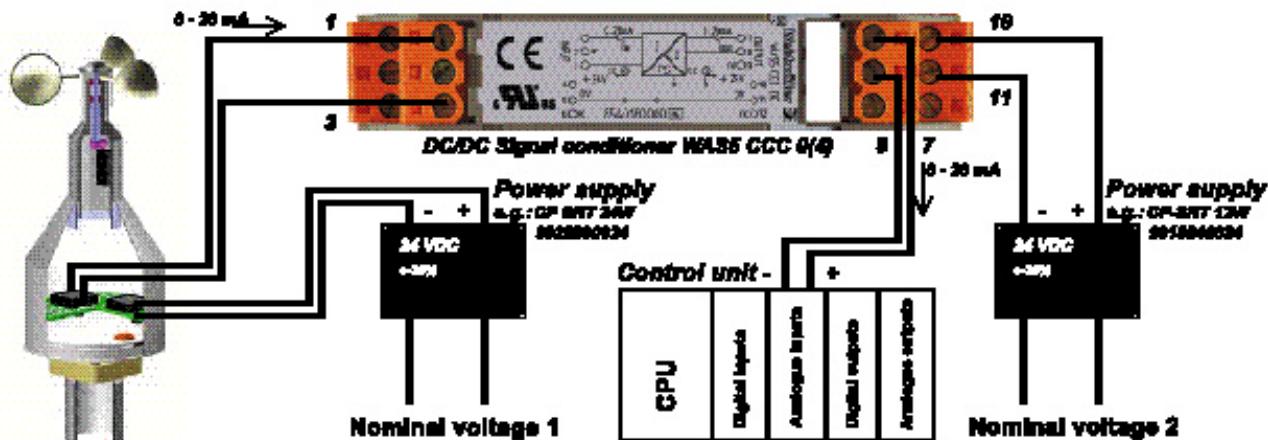

## ANALOG SIGNAL CONDITIONING - overview


### Signal Conditioners DC/DC

- Loop Powered Isolator
  - Input loop powered
  - Output loop powered
  - Loop splitter
- 2-way-isolation
  - Signal Conditioner with voltage supply on output side
  - Signal Conditioner with voltage supply on both sides


Loop Powered Isolator  
(Input Loop Powered)



Signal Conditioner with  
voltage supply on output  
side



Signal Conditioner with  
voltage supply on both  
sides








Signal conversion	Connecton type	Type	Part No.	Page
Input	Output			
<b>Loop Powered Isolator</b>				
<b>Input loop powered</b>				
<b>1-channel</b>				
0(4) ... 20 mA	0(4) ... 20 mA	X	WAS5 CCC LP	8444950000 17
0(4) ... 20 mA	0(4) ... 20 mA	X	WAZ5 CCC LP	8444960000 17
0(4) ... 20 mA	0(4) ... 20 mA	X	MCZ CCC	8411190000 16
<b>2-channel</b>				
0(4) ... 20 mA	0(4) ... 20 mA	X	WAS5 CCC LP	8463580000 17
0(4) ... 20 mA	0(4) ... 20 mA	X	WAZ5 CCC LP	8463590000 17
<b>Output loop powered</b>				
0(4) ... 20 mA	0(4) ... 20 mA	X	WAS5 CCC OLP	8543720000 14
0(4) ... 20 mA	0(4) ... 20 mA	X	WAZ5 CCC OLP	8543730000 14
<b>Loop splitter</b>				
4 ... 20 mA (1 Kanal)	4 ... 20 mA (2 Kanäle)	X	WAS5 CCC 2OLP	8581160000 15
4 ... 20 mA (1 Kanal)	4 ... 20 mA (2 Kanäle)	X	WAS5 CCC 2OLP	8581170000 15
<b>Signal Conditioner with voltage supply on output side</b>				
4 ... 20 mA	4 ... 20 mA	X	WAS4 CCC DC	8444980000 18
4 ... 20 mA	4 ... 20 mA	X	WAZ4 CCC DC	8444990000 18
4 ... 20 mA	0 ... 20 mA	X	WAS4 CCC DC	8445010000 18
4 ... 20 mA	0 ... 20 mA	X	WAZ4 CCC DC	8445020000 18
4 ... 20 mA	0 ... 10 V	X	WAS4 CVC DC	8445040000 18
4 ... 20 mA	0 ... 10 V	X	WAZ4 CVC DC	8445050000 18
<b>Signal Conditioner with voltage supply on both sides</b>				
0 ... 20 mA	0 ... 20 mA	X	WAS4 CCC DC	8445070000 19
0 ... 20 mA	0 ... 20 mA	X	WAZ4 CCC DC	8445080000 19
0 ... 20 mA	4 ... 20 mA	X	WAS4 CCC DC	8446970000 19
0 ... 20 mA	4 ... 20 mA	X	WAZ4 CCC DC	8446990000 19
0 ... 20 mA	0 ... 10 V	X	WAS4 CVC DC	8447020000 19
0 ... 20 mA	0 ... 10 V	X	WAZ4 CVC DC	8447030000 19
0 ... 10 V	0 ... 20 mA	X	WAS4 VCC DC	8447050000 20
0 ... 10 V	0 ... 20 mA	X	WAZ4 VCC DC	8447080000 20
0 ... 10 V	4 ... 20 mA	X	WAS4 VCC DC	8447100000 20
0 ... 10 V	4 ... 20 mA	X	WAZ4 VCC DC	8447110000 20
0 ... 10 V	0 ... 10 V	X	WAS4 VVC DC	8447130000 20
0 ... 10 V	0 ... 10 V	X	WAZ4 VVC DC	8447140000 20

## ANALOG SIGNAL CONDITIONING - overview

### Signal Conditioners DC/DC

- 3-way-isolation
  - transmission frequency 10 Hz
  - transmission frequency 20 kHz
  - free configurable

### DC Alarm conditioners

	Signal conversion	Connection type	Type	Part No.	Page																																																																																																												
3-way-isolation transmission frequency 10 Hz	 <p>Input                      Output</p> <p><b>3-way-isolation transmission frequency 10 Hz</b></p> <table border="1"> <tr><td>0 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 CCC</td><td>8540180000</td><td>21</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 CCC</td><td>8540190000</td><td>21</td></tr> <tr><td>0 ... 20 mA</td><td>4 ... 20 mA</td><td>X</td><td>WAS5 CCC</td><td>8540250000</td><td>21</td></tr> <tr><td>0 ... 20 mA</td><td>4 ... 20 mA</td><td>X</td><td>WAZ5 CCC</td><td>8540260000</td><td>21</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAS5 CVC</td><td>8540270000</td><td>21</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 CVC</td><td>8540280000</td><td>21</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 CCC</td><td>8540200000</td><td>22</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 CCC</td><td>8540210000</td><td>22</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAS5 CVC</td><td>8540230000</td><td>22</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 CVC</td><td>8540240000</td><td>22</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 VCC</td><td>8540310000</td><td>23</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 VCC</td><td>8540320000</td><td>23</td></tr> <tr><td>0 ... 10 V</td><td>4 ... 20 mA</td><td>X</td><td>WAS5 VCC</td><td>8540290000</td><td>23</td></tr> <tr><td>0 ... 10 V</td><td>4 ... 20 mA</td><td>X</td><td>WAZ5 VCC</td><td>8540300000</td><td>23</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td>X</td><td>WAS5 VVC</td><td>8540330000</td><td>23</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 VVC</td><td>8540340000</td><td>23</td></tr> </table>	0 ... 20 mA	0 ... 20 mA	X	WAS5 CCC	8540180000	21	0 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC	8540190000	21	0 ... 20 mA	4 ... 20 mA	X	WAS5 CCC	8540250000	21	0 ... 20 mA	4 ... 20 mA	X	WAZ5 CCC	8540260000	21	0 ... 20 mA	0 ... 10 V	X	WAS5 CVC	8540270000	21	0 ... 20 mA	0 ... 10 V	X	WAZ5 CVC	8540280000	21	4 ... 20 mA	0 ... 20 mA	X	WAS5 CCC	8540200000	22	4 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC	8540210000	22	4 ... 20 mA	0 ... 10 V	X	WAS5 CVC	8540230000	22	4 ... 20 mA	0 ... 10 V	X	WAZ5 CVC	8540240000	22	0 ... 10 V	0 ... 20 mA	X	WAS5 VCC	8540310000	23	0 ... 10 V	0 ... 20 mA	X	WAZ5 VCC	8540320000	23	0 ... 10 V	4 ... 20 mA	X	WAS5 VCC	8540290000	23	0 ... 10 V	4 ... 20 mA	X	WAZ5 VCC	8540300000	23	0 ... 10 V	0 ... 10 V	X	WAS5 VVC	8540330000	23	0 ... 10 V	0 ... 10 V	X	WAZ5 VVC	8540340000	23																
0 ... 20 mA	0 ... 20 mA	X	WAS5 CCC	8540180000	21																																																																																																												
0 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC	8540190000	21																																																																																																												
0 ... 20 mA	4 ... 20 mA	X	WAS5 CCC	8540250000	21																																																																																																												
0 ... 20 mA	4 ... 20 mA	X	WAZ5 CCC	8540260000	21																																																																																																												
0 ... 20 mA	0 ... 10 V	X	WAS5 CVC	8540270000	21																																																																																																												
0 ... 20 mA	0 ... 10 V	X	WAZ5 CVC	8540280000	21																																																																																																												
4 ... 20 mA	0 ... 20 mA	X	WAS5 CCC	8540200000	22																																																																																																												
4 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC	8540210000	22																																																																																																												
4 ... 20 mA	0 ... 10 V	X	WAS5 CVC	8540230000	22																																																																																																												
4 ... 20 mA	0 ... 10 V	X	WAZ5 CVC	8540240000	22																																																																																																												
0 ... 10 V	0 ... 20 mA	X	WAS5 VCC	8540310000	23																																																																																																												
0 ... 10 V	0 ... 20 mA	X	WAZ5 VCC	8540320000	23																																																																																																												
0 ... 10 V	4 ... 20 mA	X	WAS5 VCC	8540290000	23																																																																																																												
0 ... 10 V	4 ... 20 mA	X	WAZ5 VCC	8540300000	23																																																																																																												
0 ... 10 V	0 ... 10 V	X	WAS5 VVC	8540330000	23																																																																																																												
0 ... 10 V	0 ... 10 V	X	WAZ5 VVC	8540340000	23																																																																																																												
3-way-isolation transmission frequency 20 kHz	 <p><b>3-way-isolation transmission frequency 20 kHz</b></p> <table border="1"> <tr><td>0 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 CCC HF</td><td>8447160000</td><td>24</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 CCC HF</td><td>8447170000</td><td>24</td></tr> <tr><td>0 ... 20 mA</td><td>4 ... 20 mA</td><td>X</td><td>WAS5 CCC HF</td><td>8447190000</td><td>24</td></tr> <tr><td>0 ... 20 mA</td><td>4 ... 20 mA</td><td>X</td><td>WAZ5 CCC HF</td><td>8447200000</td><td>24</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAS5 CVC HF</td><td>8447220000</td><td>24</td></tr> <tr><td>0 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 CVC HF</td><td>8447230000</td><td>24</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 CCC HF</td><td>8447250000</td><td>25</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 CCC HF</td><td>8447260000</td><td>25</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAS5 CVC HF</td><td>8447280000</td><td>25</td></tr> <tr><td>4 ... 20 mA</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 CVC HF</td><td>8447290000</td><td>25</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 20 mA</td><td>X</td><td>WAS5 VCC HF</td><td>8447310000</td><td>26</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 20 mA</td><td>X</td><td>WAZ5 VCC HF</td><td>8447320000</td><td>26</td></tr> <tr><td>0 ... 10 V</td><td>4 ... 20 mA</td><td>X</td><td>WAS5 VCC HF</td><td>8447340000</td><td>26</td></tr> <tr><td>0 ... 10 V</td><td>4 ... 20 mA</td><td>X</td><td>WAZ5 VCC HF</td><td>8447350000</td><td>26</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td>X</td><td>WAS5 VVC HF</td><td>8447370000</td><td>27</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td>X</td><td>WAZ5 VVC HF</td><td>8447380000</td><td>27</td></tr> <tr><td>-10 ... +10 V</td><td>-10 ... +10 V</td><td>X</td><td>WAS5 VVC HF</td><td>8561610000</td><td>27</td></tr> <tr><td>-10 ... +10 V</td><td>-10 ... +10 V</td><td>X</td><td>WAZ5 VVC HF</td><td>8587000000</td><td>27</td></tr> </table>	0 ... 20 mA	0 ... 20 mA	X	WAS5 CCC HF	8447160000	24	0 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC HF	8447170000	24	0 ... 20 mA	4 ... 20 mA	X	WAS5 CCC HF	8447190000	24	0 ... 20 mA	4 ... 20 mA	X	WAZ5 CCC HF	8447200000	24	0 ... 20 mA	0 ... 10 V	X	WAS5 CVC HF	8447220000	24	0 ... 20 mA	0 ... 10 V	X	WAZ5 CVC HF	8447230000	24	4 ... 20 mA	0 ... 20 mA	X	WAS5 CCC HF	8447250000	25	4 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC HF	8447260000	25	4 ... 20 mA	0 ... 10 V	X	WAS5 CVC HF	8447280000	25	4 ... 20 mA	0 ... 10 V	X	WAZ5 CVC HF	8447290000	25	0 ... 10 V	0 ... 20 mA	X	WAS5 VCC HF	8447310000	26	0 ... 10 V	0 ... 20 mA	X	WAZ5 VCC HF	8447320000	26	0 ... 10 V	4 ... 20 mA	X	WAS5 VCC HF	8447340000	26	0 ... 10 V	4 ... 20 mA	X	WAZ5 VCC HF	8447350000	26	0 ... 10 V	0 ... 10 V	X	WAS5 VVC HF	8447370000	27	0 ... 10 V	0 ... 10 V	X	WAZ5 VVC HF	8447380000	27	-10 ... +10 V	-10 ... +10 V	X	WAS5 VVC HF	8561610000	27	-10 ... +10 V	-10 ... +10 V	X	WAZ5 VVC HF	8587000000	27				
0 ... 20 mA	0 ... 20 mA	X	WAS5 CCC HF	8447160000	24																																																																																																												
0 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC HF	8447170000	24																																																																																																												
0 ... 20 mA	4 ... 20 mA	X	WAS5 CCC HF	8447190000	24																																																																																																												
0 ... 20 mA	4 ... 20 mA	X	WAZ5 CCC HF	8447200000	24																																																																																																												
0 ... 20 mA	0 ... 10 V	X	WAS5 CVC HF	8447220000	24																																																																																																												
0 ... 20 mA	0 ... 10 V	X	WAZ5 CVC HF	8447230000	24																																																																																																												
4 ... 20 mA	0 ... 20 mA	X	WAS5 CCC HF	8447250000	25																																																																																																												
4 ... 20 mA	0 ... 20 mA	X	WAZ5 CCC HF	8447260000	25																																																																																																												
4 ... 20 mA	0 ... 10 V	X	WAS5 CVC HF	8447280000	25																																																																																																												
4 ... 20 mA	0 ... 10 V	X	WAZ5 CVC HF	8447290000	25																																																																																																												
0 ... 10 V	0 ... 20 mA	X	WAS5 VCC HF	8447310000	26																																																																																																												
0 ... 10 V	0 ... 20 mA	X	WAZ5 VCC HF	8447320000	26																																																																																																												
0 ... 10 V	4 ... 20 mA	X	WAS5 VCC HF	8447340000	26																																																																																																												
0 ... 10 V	4 ... 20 mA	X	WAZ5 VCC HF	8447350000	26																																																																																																												
0 ... 10 V	0 ... 10 V	X	WAS5 VVC HF	8447370000	27																																																																																																												
0 ... 10 V	0 ... 10 V	X	WAZ5 VVC HF	8447380000	27																																																																																																												
-10 ... +10 V	-10 ... +10 V	X	WAS5 VVC HF	8561610000	27																																																																																																												
-10 ... +10 V	-10 ... +10 V	X	WAZ5 VVC HF	8587000000	27																																																																																																												
3-way-isolation (universal)	 <p><b>3-way-isolation free configurable</b></p> <table border="1"> <tr><td>universal</td><td>X</td><td>WAS4 PRO DC/DC</td><td>8560740000</td><td>30</td></tr> <tr><td>universal</td><td>X</td><td>WAZ4 PRO DC/DC</td><td>8560750000</td><td>30</td></tr> </table>	universal	X	WAS4 PRO DC/DC	8560740000	30	universal	X	WAZ4 PRO DC/DC	8560750000	30																																																																																																						
universal	X	WAS4 PRO DC/DC	8560740000	30																																																																																																													
universal	X	WAZ4 PRO DC/DC	8560750000	30																																																																																																													
	<p><b>DC Alarm conditioners</b></p>  <table border="1"> <tr><td>0(4) ... 20 mA</td><td>0(4) ... 20 mA</td><td>X</td><td>MAS DC/DC select</td><td>8594810000</td><td>31</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td></td><td></td><td></td><td></td></tr> <tr><td>0(4) ... 20 mA</td><td>0(4) ... 20 mA</td><td>X</td><td>MAZ DC/DC select</td><td>8594840000</td><td>31</td></tr> <tr><td>0 ... 10 V</td><td>0 ... 10 V</td><td></td><td></td><td></td><td></td></tr> </table>  <table border="1"> <tr><td>0 ... 10 V / 0(4) ... 20 mA</td><td>2 CO</td><td>X</td><td>WAS5 DC/Alarm</td><td>8543820000</td><td>33</td></tr> <tr><td>0 ... 10 V / 0(4) ... 20 mA</td><td>2 CO</td><td>X</td><td>WAZ5 DC/Alarm</td><td>8543830000</td><td>33</td></tr> </table>	0(4) ... 20 mA	0(4) ... 20 mA	X	MAS DC/DC select	8594810000	31	0 ... 10 V	0 ... 10 V					0(4) ... 20 mA	0(4) ... 20 mA	X	MAZ DC/DC select	8594840000	31	0 ... 10 V	0 ... 10 V					0 ... 10 V / 0(4) ... 20 mA	2 CO	X	WAS5 DC/Alarm	8543820000	33	0 ... 10 V / 0(4) ... 20 mA	2 CO	X	WAZ5 DC/Alarm	8543830000	33																																																																												
0(4) ... 20 mA	0(4) ... 20 mA	X	MAS DC/DC select	8594810000	31																																																																																																												
0 ... 10 V	0 ... 10 V																																																																																																																
0(4) ... 20 mA	0(4) ... 20 mA	X	MAZ DC/DC select	8594840000	31																																																																																																												
0 ... 10 V	0 ... 10 V																																																																																																																
0 ... 10 V / 0(4) ... 20 mA	2 CO	X	WAS5 DC/Alarm	8543820000	33																																																																																																												
0 ... 10 V / 0(4) ... 20 mA	2 CO	X	WAZ5 DC/Alarm	8543830000	33																																																																																																												

## ANALOG SIGNAL CONDITIONING - overview

Signal Conditioners RTD  
 Thermo Signal Conditioners  
 Frequency Signal Conditioners  
 Bridge Signal Conditioners  
 Interface Converter

- PT100 Select
- PT100 Output select
- RTD universal (3-way-isolation)
- Thermo Select
- Thermo universal (3-way-isolation)
- Frequency Signal Conditioner


- Frequency Signal Conditioner (3-way-isolation)
- Bridge Signal Conditioners (3-way-isolation)
- Interface Converter for RS232 to RS485/TTY

PT 100  
 Output loop powered




Signal conversion	Connection type	Type	Part No.	Page
Input	Output			
<b>MCZ PT100 CLP</b>				
PT 100/2/3 0...100°C	4 ... 20 mA	X	MCZ P100/3 CLP	8425720000
PT 100/2/3 0...120°C	4 ... 20 mA	X	MCZ P100/3 CLP	8483680000
PT 100/2/3 0...150°C	4 ... 20 mA	X	MCZ P100/3 CLP	8604420000
PT 100/2/3 0...200°C	4 ... 20 mA	X	MCZ P100/3 CLP	8473010000
PT 100/2/3 0...300°C	4 ... 20 mA	X	MCZ P100/3 CLP	8473020000
PT 100/2/3 -50...150°C	4 ... 20 mA	X	MCZ P100/3 CLP	8473000000
PT 100/2/3 -40...100°C	4 ... 20 mA	X	MCZ P100/3 CLP	8604430000

PT 100 Select



WAVEANALOG PT100 Select				
PT100/2	0(4) ... 20 mA	X	WTS4 PT100/2 C	8432210000
PT100/2	0(4) ... 20 mA	X	WTZ4 PT100/2 C	8432220000
PT100/2	0 ... 10 V	X	WTS4 PT100/2 V	8432180000
PT100/2	0 ... 10 V	X	WTZ4 PT100/2 V	8432190000
PT100/3	0(4) ... 20 mA	X	WTS4 PT100/3 C	8432150000
PT100/3	0(4) ... 20 mA	X	WTZ4 PT100/3 C	8432160000
PT100/3	0 ... 10 V	X	WTS4 PT100/3 V	8432090000
PT100/3	0 ... 10 V	X	WTZ4 PT100/3 V	8432130000
PT100/4	0(4) ... 20 mA	X	WTS4 PT100/4 C	8432270000
PT100/4	0(4) ... 20 mA	X	WTZ4 PT100/4 C	8432280000
PT100/4	0 ... 10 V	X	WTS4 PT100/4 V	8432240000
PT100/4	0 ... 10 V	X	WTZ4 PT100/4 V	8432250000

PT 100 Output select  
 2-way-isolation




MICROANALOG PT100 output select				
PT100 2/3	0 ... 100°C	X	MAS PT100 output select	8594820000
PT100 2/3	0 ... 100°C	X	MAZ PT100 output select	8594850000

PRO RTD (configurable)  
 3-way-isolation




WAVEANALOG PRO RTD				
universal		X	WAS5 PRO RTD	8560700000
universal		X	WAZ5 PRO RTD	8560710000

Thermo Select



WAVEANALOG Thermo Select				
°C	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V	X	WTS4 Thermo Select	8432300000
°C	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V	X	WTZ4 Thermo Select	8432310000

Thermo Output select  
 2-way-isolation




MICROANALOG Thermo output select				
Thermoelement Typ K		X	MAS Thermo-K Output select	8594830000
Thermoelement Typ K		X	MAZ Thermo-K Output select	8594860000
Thermoelement Typ J		X	MAS Thermo-J Output select	8615210000
Thermoelement Typ J		X	MAS Thermo-J Output select	8615240000

PRO Thermo (configurable)  
 3-way-isolation




WAVEANALOG PRO Thermo				
°C	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V	X	WAS5 PRO Thermo	8560720000
°C	0 ... 20 mA, 4 ... 20 mA, 0 ... 10 V	X	WAZ5 PRO Thermo	8560730000

Frequency Signal  
 Conditioner




MCZ Frequency Signal Conditioner				
0...10 V	f-configurable	X	MCZ VFC	8461470000
0...20 mA	f-configurable	X	MCZ CFC	8461480000
4...20 mA	f-configurable	X	MCZ CFC	8461490000

Frequency Signal  
 Conditioner  
 (3 way isolation)




WAVEANALOG PRO Frequency				
configurable	configurable	X	WAS4 PRO Freq	8581180000
configurable	configurable	X	WAZ4 PRO Freq	8581190000

Bridge Signal Conditioners  
 (3 way isolation)



WAVEANALOG PRO Bridge				
configurable	configurable	X	WAS5 PRO Bridge	8581200000
configurable	configurable	X	WAZ5 PRO Bridge	8581210000

Interface Converter



WAVEDATA				
RS232	RS485/422	X	WAS RS232/RS485/422	8615700000
RS485	TTY	X	WAS RS232/TTY	8615690000

## ANALOG SIGNAL CONDITIONING - overview

Current monitoring up to 60 A ac/dc  
 Voltage monitoring up to 450 Vac<sub>eff</sub>  
 Power supply

- Current monitoring with relay output
- Current monitoring with analog output
- Voltage monitoring with analog output
- Power supply 24V/0.5A

	Signal conversion	Connection type	Type	Part No.	Page			
Current monitoring	  		<b>WAVECONTROL Current monitoring</b>					
			1/5/10 A ac	relay	X	WAS2 CMR	8516560000	52
			1/5/10 A ac	relay	X	WAZ2 CMR	8516570000	52
20/40/60 A ac	relay	X	WAS2 CMR	8513340000	52			
20/40/60 A ac	relay	X	WAZ2 CMR	8526600000	52			
1/5/10 A ac	0(4) ... 20 mA							
	0 ... 10 V	X	WAS1 CMA	8523400000	53			
1/5/10 A ac	0(4) ... 20 mA							
	0 ... 10 V	X	WAZ1 CMA	8523410000	53			
1/5/10 A ac	4 ... 20 mA	X	WAS1 LP CMA	8528650000	53			
1/5/10 A ac	4 ... 20 mA	X	WAZ1 LP CMA	8528660000	53			
5/10 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAS2 CMA	8526610000	54			
5/10 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAZ2 CMA	8526620000	54			
20/25/30 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAS2 CMA	8545830000	54			
20/25/30 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAZ2 CMA	8545840000	54			
40/50/60 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAS2 CMA	8513330000	55			
40/50/60 A ac/dc	0(4) ... 20 mA							
	0 ... 10 V	X	WAZ2 CMA	8526590000	55			
<b>WAVECONTROL voltage monitoring</b>								
0...450 Vac <sub>eff</sub>		X	WAS2 VMA Vac	8581220000	56			
0...450 Vac <sub>eff</sub>		X	WAZ2 VMA Vac	8581230000	56			
<b>WAVEPOWER Power supply</b>								
115-230 Vac	24 Vdc	X	CP-SNT 12W	9918840024	57			
Power supply								

## WAVESERIES benefits

### Concept

WAVESERIES - a new generation of analog signal conditioners. The WAVESERIES range of modules from Weidmüller brings together the compact, space-saving enclosure design (WAVEBOX) and a wide variety of functions. The product family provides a comprehensive range of signal conditioners.



- Independent connection technology – screw-type or tension clamp via pluggable terminal connectors
- Mounting without tools
- Quick power-up – pluggable circuit board
- Standardized current and voltage signals
- Minimum wiring thanks to cross-connections
- High functionality
- Easy selection thanks to clear type designation
- Space-saving – more space in switchgear cabinet
- Saves costs

### Replacement

The circuit board can be removed from the enclosure without using tools. Just press the locking clips on the head piece, and pull out the circuit board along with the connection terminals.

### Cross-connection

Enclosures from the same family, can be joined together using cross-connections in order to connect the supply voltage from one module to another.

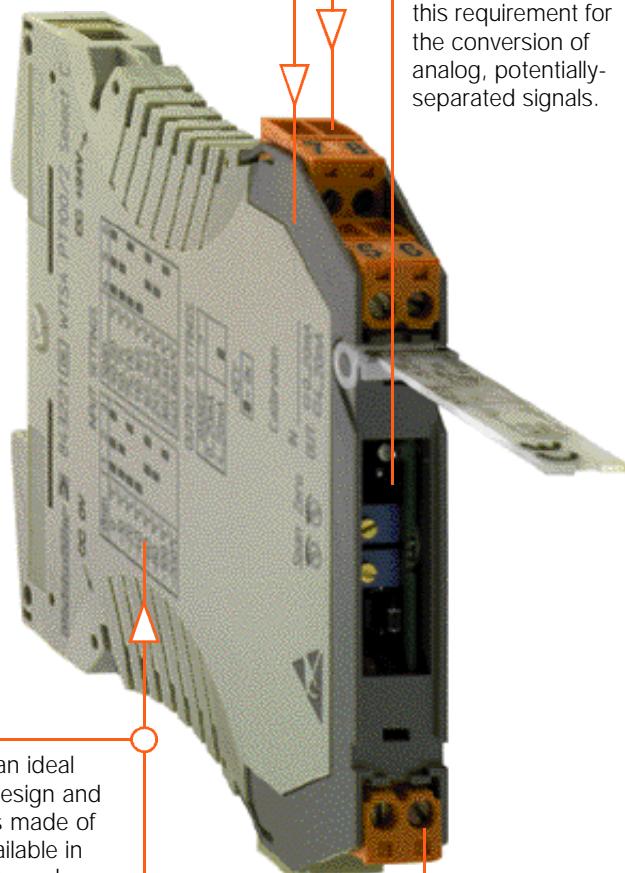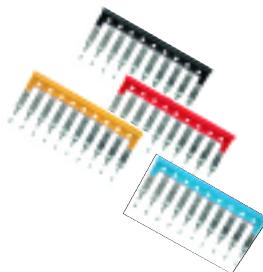


### The housing (WAVEBOX)

The WAVEBOX enclosure is an ideal combination of technology, design and functionality. The enclosure is made of recyclable plastics, and is available in four different overall widths. It can be mounted without tools. Fulfilling the necessary EMC requirements, the enclosure also provides good thermal dissipation thanks to the ventilation slots on the side.

### Coding

The coding element enables screw-type connections as well as tension clamp connections to be coded without reducing the number of poles. This ensures that the connectors cannot be reversed.

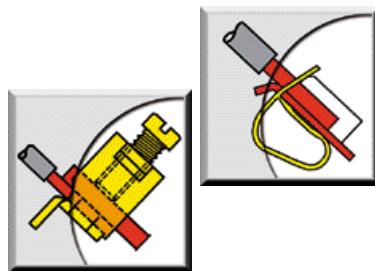


### Connection

High flexibility during wiring thanks to BLZ screw-type connections and the BLZF tension clamp connector system (up to 2.5 mm<sup>2</sup>).

### Safety

"Safety separation" according to EN 50178 is a standard that nowadays is taken for granted. WAVESERIES fulfills this requirement for the conversion of analog, potentially-separated signals.

## MCZ / MICROSERIES benefits

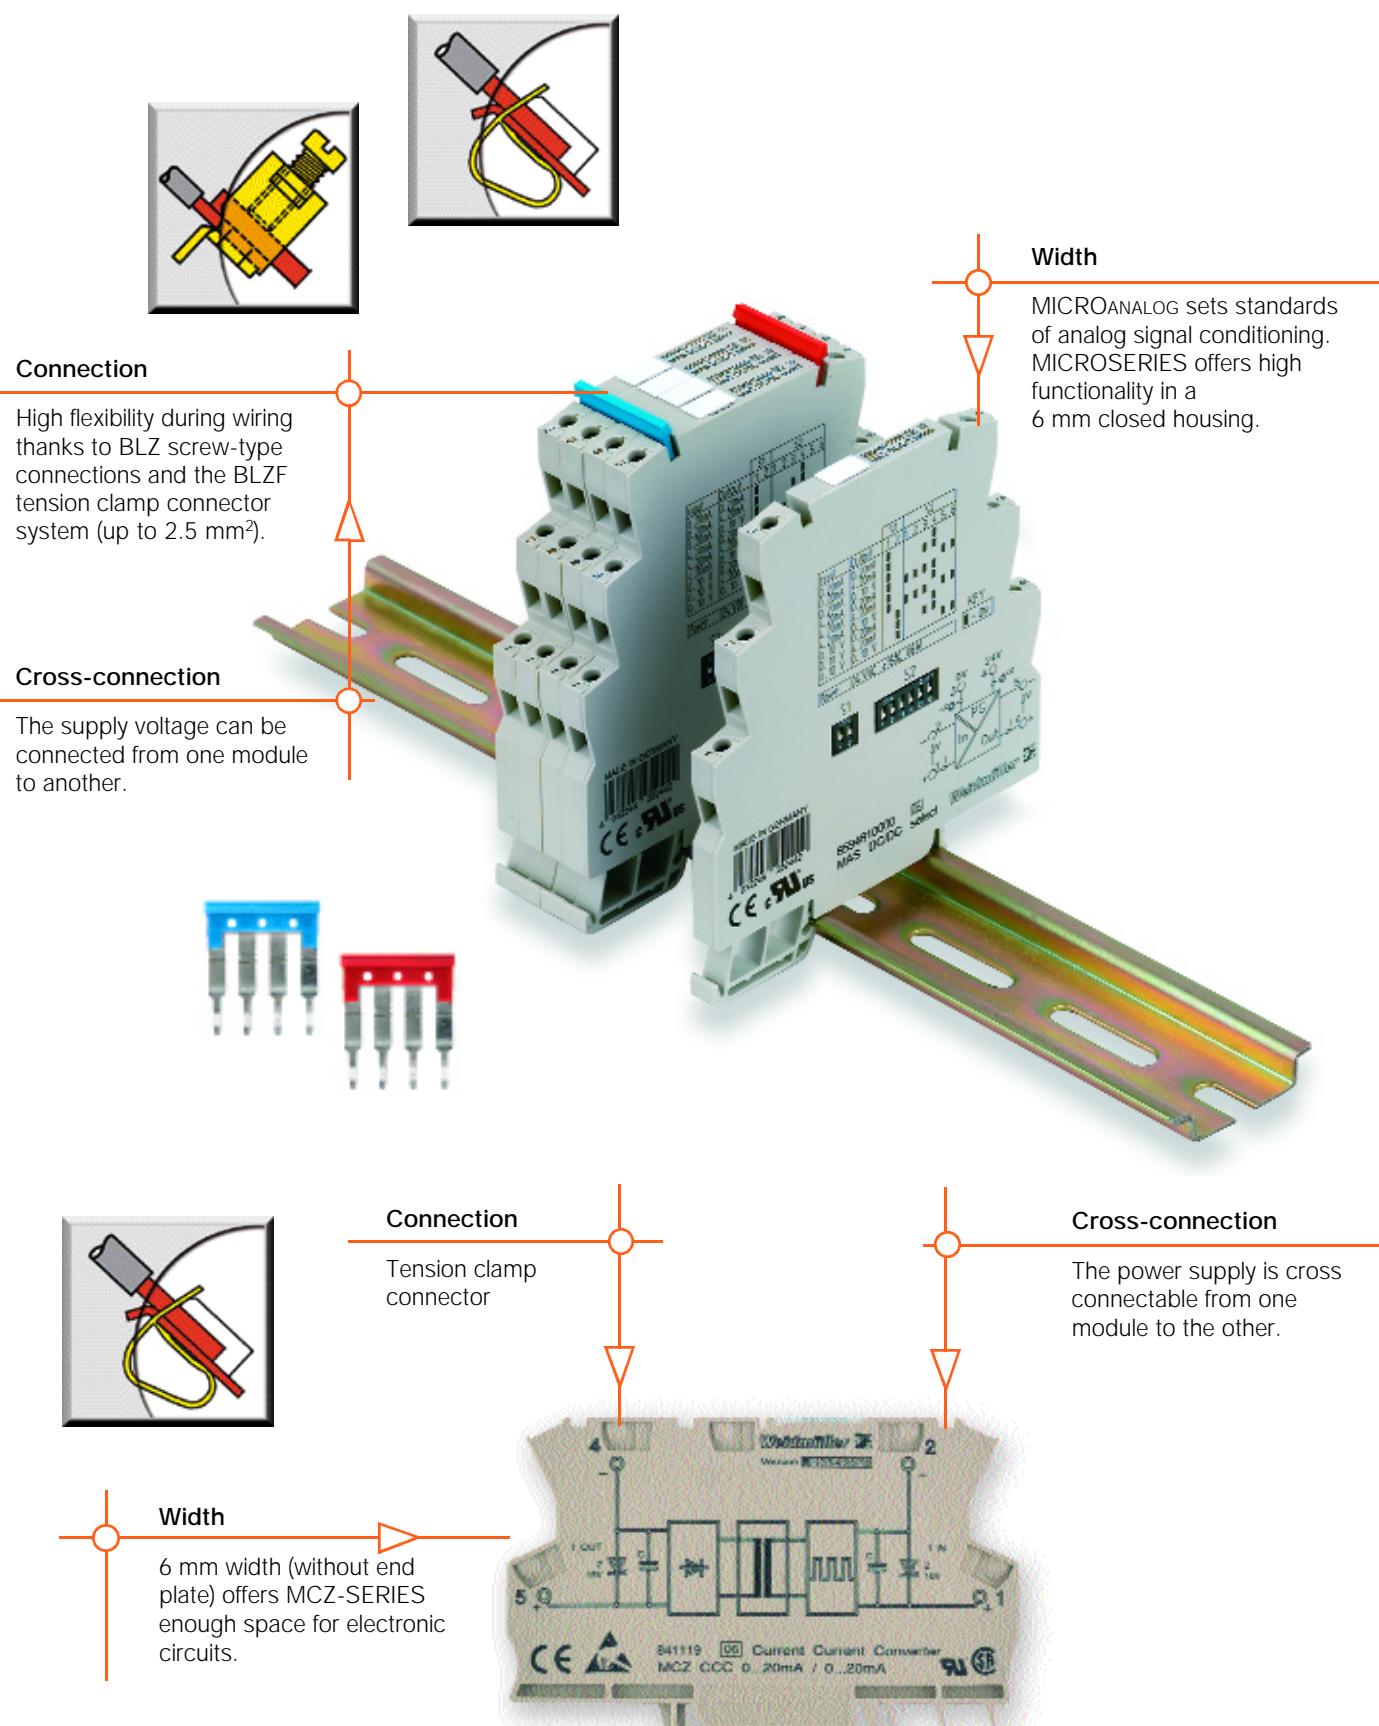

**NEW**

## DC/DC Loop Powered Isolator(Output loop powered)

### WAVEANALOG OLP

- Galvanic isolation
- Output Loop Powered
- Low power consumption
- Input range adjustable by DIP-Switches
- No adjustment required

### Approvals:



### Schematic circuit diagram



### Ordering data

Screw connection  
Tension clamp connection

### Technical data\*

#### Input (adjustable by DIP-Switches)

Input voltage	0...5 V, 0...10 V
Maximum input voltage	30 V
Input resistance	0...5 V: 210 k ; 0...10 V: 430 k
Input current	0/4...20 mA
Maximum input current	40 mA
Input resistance	51

#### Output

Output current	4...20 mA (current loop)
Output current limitation	approx. 24 mA
Load resistance	RL=(Ub-12 V) / 20 mA, e.g. 600 at 24 V
Transmission frequency (adjustable by DIP-Switch)	10 Hz, 100 Hz
Response time	<10 Hz(typ 8 Hz) = 80 ms 100 Hz = 8 ms

#### Accuracy

Temperature coefficient ± 200 ppm/K

#### Coordination of insulation according to DIN EN 50178, 04/98


Supply voltage	min. 12 Vdc max. 30 Vdc
Rated voltage	300 V
Rated surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance and creepage distances	5.5 mm
Test voltage	4 kV <sub>eff</sub>

#### General Data

Operating temperature	0...+55 °C (mounted on horizontal DIN rail)
Storage temperature	-20 °C...+85 °C
Standards/Specifications	EN 50178
EMC standards	EN 50082-2, EN 50081-1, EN 50081-2 EN 55011
Factory setting	0...20 mA, 10 Hz
Dimensions L/H/W	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)
Weight	100 g (0.22 lbs.)
Approvals	CE, cULus

\* Tu 23°C, single module


### CCC OLP

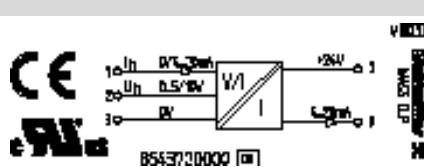

Input	SW 1			
	1	2	3	4
0...20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4...20 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0...5 V	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0...10 V	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Transmission frequency				
10 Hz	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
100 Hz	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

■ = on  
□ = off

### Application

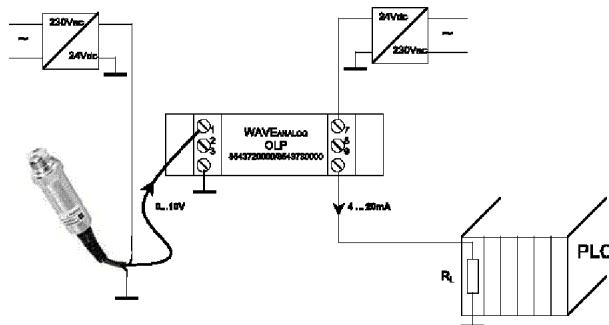

## DC/DC Loop Powered Isolator (Loop splitter)

### WAVEANALOG 2OLP

- Galvanic isolation
- Input and output Loop Powered
- Low power consumption
- No adjustment required


### CCC 2OLP



#### Approvals:



#### Schematic circuit diagram

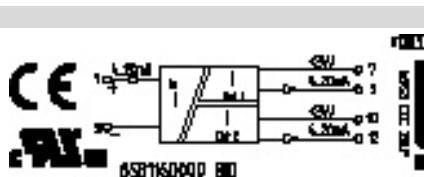

#### Ordering data

Screw connection

Type

Part No.

Tension clamp connection

WAS5 CCC 2OLP

8581160000

#### Technical data\*

##### Input

Input current 4...20 mA (current loop)

max. input current 40 mA

Input voltage drop 3.8 V

##### Output

Output current (Channel 1) 4...20 mA (current loop)

Output current (Channel 2) 4...20 mA (current loop)

Output current limitation approx. 31 mA

Load resistance  $RL = (V_b - RV) / 20 \text{ mA}$ , e.g. 600 ohms at 24 V

Minimum voltage supply 12 Vdc

Transmission frequency 30 Hz

Response time < 20 ms

Accuracy 0.2 % (typ. 0.1 %)

Temperature coefficient  $\pm 250 \text{ ppm/K}$

##### Coordination of insulation according to DIN EN 50178, 04/98

Supply voltage min. 12 Vdc max. 30 Vdc

Rated voltage 300 V

Rated surge voltage 4 kV

Oversupply category III

Contamination class 2

Clearance and creepage distance 5.5 mm

Test voltage 4 kV<sub>eff</sub>

##### General Data

Operating temperature 0...+55 °C (mounted on horizontal DIN rail)

Storage temperature -20 °C...+85 °C

Standards/Specifications EN 50178

EMC standards EN 50082-2, EN 50081-1, EN 50081-2 EN 55011


Dimensions L/H/W 92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Weight 100 g (0.22 lbs.)

Approvals

\* Tu 23°C, single module

#### Application

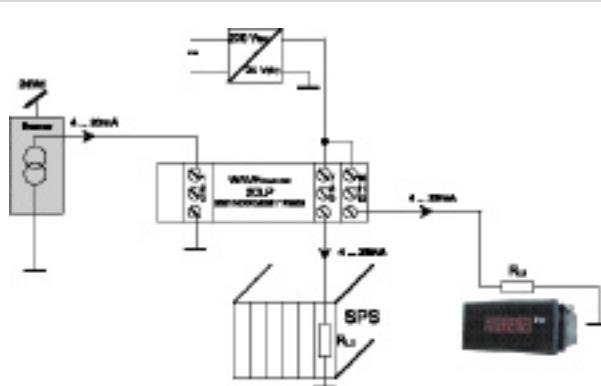

## DC/DC Loop Powered Isolator (Input loop powered)

This module is a reasonably priced passive separator for galvanically separating standard 0.4...20 mA signals.

It draws its power from the measurement signal and requires no further auxiliary power. The measurement signal is transmitted 1:1. The module is distinguished by its low power consumption as well as a response current <100 µA.


### Approvals:





### Schematic circuit diagram



### Working resistance diagram

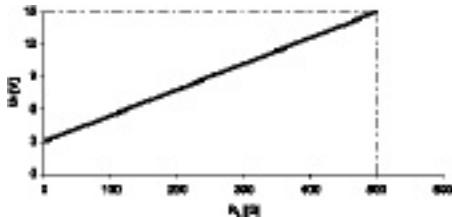

### MCZ CCC 0...20 mA/0...20 mA

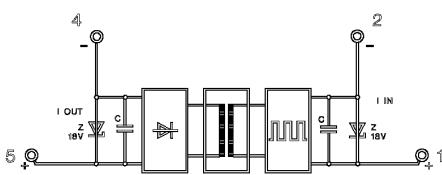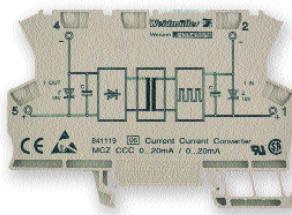

### Ordering data

for TS 35

Type

Part No.

MCZ CCC 0...20 mA/0...20 mA

8411190000

without power supply

### Technical data

#### Input

Response current

0...20 mA (max. 15 V)

< 100 µA

Voltage drop

< 2.5...3 V (at 20 mA)

Maximum overload capacity at input

50 mA, 15 V

#### Output

0...20 mA (max. 10 V)

Set time (T99)

approx. 5 ms at 500 working resistance impedance

Residual ripple

< 10 mV<sub>eff</sub>

Chopper frequency

approx. 200 kHz

Transmission error

< 0.1 % from end value, + 0.05 % from mean/100 working resistance

Temperature effect

< 50 ppm/K from measurement value for working resistance 0

#### Voltage strength

Input / Output

510 V<sub>eff</sub>

#### EMC

EMVG

EN 50081-1

EN 50082-2

Approvals

CE, cULus, CSA

Operating temperature

-25 °C...+60 °C

Storage temperature

-40 °C...+85 °C

Conductor

AWG 22...12

Conductor cross-section

1.5 mm<sup>2</sup>

Overall width

6 mm (0.24 in.)

# DC/DC Loop Powered Isolator input loop powered

## WAVEANALOG DC/DC

- Input loop powered
- Galvanic isolation
- 1-, 2-channel versions
- Low power consumption
- Safety separation

## CCC LP (1 channel)

0(4) ... 20 mA / 0(4) ... 20 mA



## CCC LP (2 channel)

0(4) ... 20 mA / 0(4) ... 20 mA





## Approvals:



## Schematic circuit diagram



## Working resistance diagram

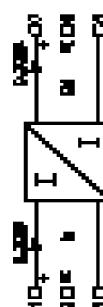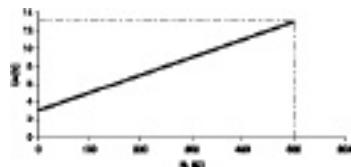

## Ordering data

Screw connection 1 channel	Type	Part No.
WAZ5 CCC LP	8444950000	
Tension clamp connection 1 channel		
Screw connection 2 channel	Type	Part No.
WAZ5 CCC LP	8444960000	
Tension clamp connection 2 channel		
Input/Output	0(4) ... 20 mA / 0(4) ... 20 mA	

## Technical data\* (per channel)

<b>Input signal</b>	0 ... 20 mA (4 ... 20 mA)
Input voltage max.	18 V
Input current max.	50 mA
Response current	< 100 µA
Voltage drop	approx. 3 V at $R_L = 0$ $I_{in} = 20 \text{ mA}$ approx. 13 V at $R_L = 500$ at $I_{in} = 20 \text{ mA}$

Type	Part No.
WAS5 CCC LP	8463580000
WAZ5 CCC LP	8463590000
0(4) ... 20 mA / 0(4) ... 20 mA	

## Output signal

Load resistance	500
Accuracy at $T_u=23^\circ\text{C}$	< 0.1% from end value
Influence of load resistance	< 0.1% from measurement value per 100 load resistance
Temperature coefficient	50 ppm / K from end value
Set time	4.5 ms at 500 working resistance
Residual ripple	< 20 mV <sub>eff</sub>
Chopper frequency	approx. 170 kHz

Type	Part No.
WAS5 CCC LP	8463580000
WAZ5 CCC LP	8463590000
0(4) ... 20 mA / 0(4) ... 20 mA	

## General Data

Operating temperature	-25 °C ... +70 °C
Storage temperature	-40 °C ... +80 °C
Dimensions L/H/W	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)
Approvals	CE, cULus, CSA, GL

Type	Part No.
WAS5 CCC LP	8463580000
WAZ5 CCC LP	8463590000
0(4) ... 20 mA / 0(4) ... 20 mA	

## Coordination of insulation according to EN 50178, 04/98 (safe separation)

Rated voltage	300 V
Rated surge voltage	6 kV
Overvoltage category	III
Contamination class	2
Clearance and creepage distance	5.5 mm
Isolation voltage, voltage strength	4 kV <sub>eff</sub> / 1 s
Input/output, channel / channel	4 kV <sub>eff</sub> / 1 min
Input/output to mounting rail	EN 50178 (safe separation)
Standards/Specifications	EN 50081, EN 50082,
EMC standards	EN 55011

Type	Part No.
WAS5 CCC LP	8463580000
WAZ5 CCC LP	8463590000
0(4) ... 20 mA / 0(4) ... 20 mA	

\*  $T_u = 23^\circ\text{C}$  single module

## DC/DC-Signal Conditioners 2-way-isolation

### WAVEANALOG DC/DC

- Voltage supply on output side
- 2-way-isolation
- Analog signal conditioning
- Galvanic isolation between input/output signal
- Input loop powered
- Cross-connectable voltage supply via cross-connectors

### Approvals:



Schematic circuit diagram


### CCC DC

4 ... 20 mA / 4 ... 20 mA



### CCC DC

4 ... 20 mA / 0 ... 20 mA

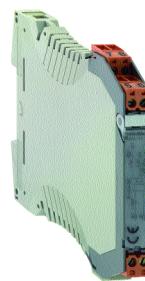

### CVC DC

4 ... 20 mA / 0 ... 10 V



### Ordering data

Screw connection	Type WAS4 CCC DC	Part No. 8444980000
Tension clamp connection	Type WAS4 CCC DC	Part No. 8444990000
Input/Output	4 ... 20 mA / 4...20 mA	4 ... 20 mA / 0 ... 20 mA

### Type

Part No. WAS4 CCC DC 8444980000

### Type

Part No. WAS4 CCC DC 8445010000

### Type

Part No. WAS4 CVC DC 8445040000

### Technical data\*

#### Input signal

Input voltage max.	4 ... 20 mA
Input current max.	7 V
	25 mA

#### Type

Part No. WAS4 CCC DC 8444980000

Tension clamp connection	Type WAS4 CCC DC
Input/Output	Part No. 8444990000

#### Type

Part No. WAS4 CCC DC 8445010000

#### Type

Part No. WAS4 CVC DC 8445040000

#### Output signal

Load resistance	4 ... 20 mA
Accuracy at Tu=23 °C	740 at 24 Vdc
Temperature coefficient	± 0.2% from end value
Response time	250 ppm / K from end value
Cut-off frequency (-3 dB)	30 ms (typ. 20 ms)
	15 Hz (typ. 20 Hz)

#### Type

Part No. WAS4 CCC DC 8445020000

#### Type

Part No. WAS4 CCC DC 8445050000

#### Type

Part No. WAS4 CVC DC 8445050000

### General Data

Voltage supply	24 Vdc ±20%
	(19.2 ... 28.8 Vdc)
Power consumption	< 32 mA at I <sub>out</sub> = 20 mA
Current carrying capacity of cross-connection	2 A
Operating temperature	0 °C ... +55 °C (line up on DIN rail)
Storage temperature	-20 °C ... +85 °C
Dimensions L/H/W	92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)
Approvals	CE, cULus, CSA

#### Type

Part No. WAS4 CCC DC 8445010000

#### Type

Part No. WAS4 CCC DC 8445020000

#### Type

Part No. WAS4 CVC DC 8445050000

### Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance and creepage distance	3 mm
Isolation voltage, voltage strength	4 kV <sub>eff</sub> / 1 min
Input/output to mounting rail	4 kV <sub>eff</sub> / 1 min
Standards/Specifications	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011

#### Type

Part No. WAS4 CCC DC 8445050000

#### Type

Part No. WAS4 CCC DC 8445010000

#### Type

Part No. WAS4 CVC DC 8445040000

\* Tu = 23 °C single module

## DC/DC-Signal Conditioners 2-way-isolation

### WAVEANALOG DC/DC

- Voltage supply on both sides
- 2-way-isolation
- Analog signal conditioning
- Galvanic isolation between input/output signal
- Cross-connectable voltage supply via cross-connectors

### CCC DC

0 ... 20 mA / 0 ... 20 mA



### CCC DC

0 ... 20 mA / 4 ... 20 mA



### CVC DC


0 ... 20 mA / 0 ... 10 V



### Approvals:



### Schematic circuit diagram

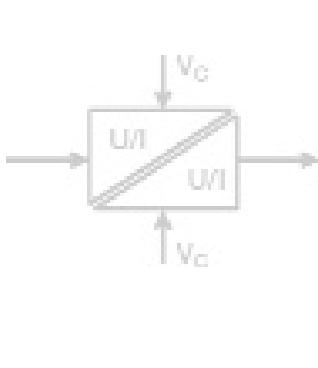

### Ordering data

Screw connection

Type Part No.

Tension clamp connection

WAS4 CCC DC 8445070000

Input/Output

WAZ4 CCC DC 8445080000

0 ... 20 mA / 0 ... 20 mA

Type Part No.

WAS4 CCC DC 8446970000

WAZ4 CCC DC 8446990000

0 ... 20 mA / 4 ... 20 mA

Type Part No.

WAS4 CVC DC 8447020000

WAZ4 CVC DC 8447030000

0 ... 20 mA / 0 ... 10 V

### Technical data\*

#### Input signal

0 ... 20 mA

Input current max.

25 mA

Input resistance

50

#### Output signal

0 ... 20 mA

Load resistance

740 at 24 Vdc

Accuracy at Tu=23 °C

± 0.2% from end value

Temperature coefficient

250 ppm / K from end value

Response time

30 ms (typ. 16 ms)

Cut-off frequency (-3 dB)

15 Hz (typ. 25 Hz)

#### General Data

Voltage supply

24 Vdc ±20%

(19.2 ... 28.8 Vdc)

24 Vdc ±20%

(19.2 ... 28.8 Vdc)

(19.2 ... 28.8 Vdc)

Power consumption input

< 11 mA at I<sub>in</sub> = 20 mA

< 11 mA at I<sub>in</sub> = 20 mA

Power consumption output

< 32 mA at I<sub>out</sub> = 20 mA

< 32 mA at I<sub>out</sub> = 20 mA

Current carrying capacity of cross-connection

2 A

2 A

Operating temperature

0 °C ... +55 °C (line up on DIN rail)

0 °C ... +55 °C (line up on DIN rail)

Storage temperature

-20 °C ... +85 °C

-20 °C ... +85 °C

Dimensions L/H/W

92.4 / 112.5 / 12.5 mm

92.4 / 112.5 / 12.5

Approvals

(3.64 / 4.43 / 0.49 in.)

(3.64 / 4.43 / 0.49 in.)

CE, cULus, CSA

CE, cULus, CSA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

Rated surge voltage

4 kV

Overvoltage category

III

Contamination class

2

Clearance and creepage distance

3 mm

Isolation voltage, voltage strength

4 kV<sub>eff</sub> / 1 min

Input/output to mounting rail

3 mm

4 kV<sub>eff</sub> / 1 min

300 V

4 kV

III

2

3 mm

4 kV<sub>eff</sub> / 1 min

Standards/Specifications

EN 50178

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082,

EN 55011

\*Tu = 23 °C single module


## DC/DC-Signal Conditioners 2-way-isolation

### WAVEANALOG DC/DC

- Voltage supply on both sides
- 2-way-isolation
- Analog signal conditioning
- Galvanic isolation between input/output signal
- Cross-connectable voltage supply via cross-connectors

### VCC DC

0 ... 10 V / 0 ... 20 mA

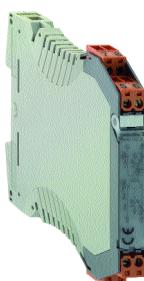

### VCC DC

0 ... 10 V / 4 ... 20 mA



### VVC DC


0 ... 10 V / 0 ... 10 V



### Approvals:



### Schematic circuit diagram

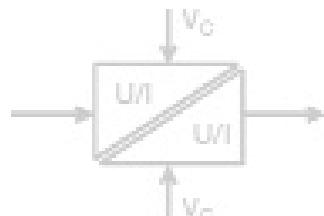

### Ordering data

	Type	Part No.	Type	Part No.	Type	Part No.
Screw connection	WAS4 VCC DC	8447050000	WAS4 VCC DC	8447100000	WAS4 VVC DC	8447130000
Tension clamp connection	WAZ4 VCC DC	8447080000	WAZ4 VCC DC	8447110000	WAZ4 VVC DC	8447140000
Input/Output	0 ... 10 V / 0 ... 20 mA		0 ... 10 V / 4 ... 20 mA		0 ... 10 V / 0 ... 10 V	

### Technical data\*

Input signal	0 ... 10 V	Output signal	0 ... 10 V	Output signal	0 ... 10 V
Input voltage max.	15 V		15 V		15 V
Input resistance	500 k		500 k		500 k
Output signal	0 ... 20 mA	Output signal	4 ... 20 mA	Output signal	0 ... 10 V
Load resistance	740 Ω at 24 Vdc		740 Ω at 24 Vdc		1 k
Accuracy at Tu=23°C	± 0.2% from end value		± 0.2% from end value		± 0.2% from end value
Temperature coefficient	250 ppm / K from end value		250 ppm / K from end value		250 ppm / K from end value
Response time	30 ms (typ. 25 ms)		30 ms (typ. 25 ms)		30 ms (typ. 25 ms)
Cut-off frequency (-3 dB)	13 Hz (typ. 17 Hz)		13 Hz (typ. 17 Hz)		13 Hz (typ. 17 Hz)

### General Data

Voltage supply	24 Vdc ±20% (19.2 ... 28.8 Vdc)	24 Vdc ±20% (19.2 ... 28.8 Vdc)	24 Vdc ±20% (19.2 ... 28.8 Vdc)
Power consumption input	< 11 mA at U <sub>in</sub> = 10 V	< 11 mA at U <sub>in</sub> = 10 V	< 11 mA at U <sub>in</sub> = 10 V
Power consumption output	< 32 mA at I <sub>out</sub> = 20 mA	< 32 mA at I <sub>out</sub> = 20 mA	< 20 mA at I <sub>out</sub> = 10 mA
Current carrying capacity of cross-connection	2 A	2 A	2 A
Operating temperature	0 °C ... +55 °C (mounted on horizontal DIN rail)	0 °C ... +55 °C (mounted on horizontal DIN rail)	0 °C ... +55 °C (mounted on horizontal DIN rail)
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L/H/W	92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)	92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)	92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)
Approvals	CE, cULus, CSA	CE, cULus, CSA	CE, cULus, CSA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Oversupply category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	3 mm	3 mm	3 mm
Isolation voltage, voltage strength	4 kV <sub>eff</sub> / 1 min	4 kV <sub>eff</sub> / 1 min	4 kV <sub>eff</sub> / 1 min
Input/output to mounting rail			
Standards/Specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011


# DC/DC-Signal Conditioners 3-way-isolation 10 Hz

## WAVEANALOG DC/DC

- 3-way-isolation
- Analog signal conditioning
- Indication LED
- Cross-connectable voltage supply via cross-connectors

## CCC

0 ... 20 mA / 0 ... 20 mA

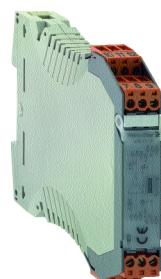

## CCC

0 ... 20 mA / 4 ... 20 mA



## CVC





0 ... 20 mA / 0 ... 10 V



## Approvals:



## Schematic circuit diagram

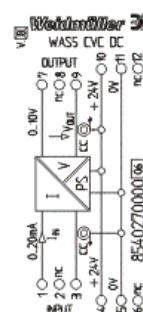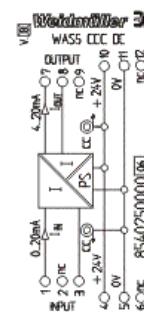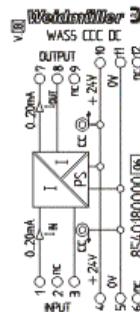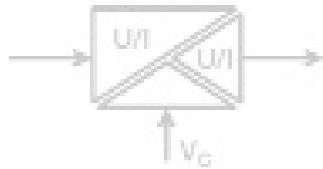

## Ordering data

	Type	Part No.	Type	Part No.	Type	Part No.
Screw connection	WAS5 CCC	8540180000*	WAS5 CCC	8540250000	WAS5 CVC	8540270000
Tension clamp connection	WAZ5 CCC	8540190000*	WAZ5 CCC	8540260000	WAZ5 CVC	8540280000
Input/Output	0 ... 20 mA / 0 ... 20 mA		0 ... 20 mA / 4 ... 20 mA		0 ... 20 mA / 0 ... 10 V	

## Technical data\*\*

<b>Input signal</b>	0 ... 20 mA	0 ... 20 mA	0 ... 20 mA
Input current max.	25 mA	25 mA	25 mA
Input resistance	110	110	110
<b>Output signal</b>	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Load resistance	600	600	1 k
Accuracy at Tu=23 °C	0.2%	0.2%	0.2%
Temperature coefficient	± 250 ppm / K	± 250 ppm / K	± 250 ppm / K
Response time	45 ms	45 ms	45 ms
Cut-off frequency (-3 dB)	10 Hz	10 Hz	10 Hz

## General Data

Voltage supply	24 Vdc ±25%	24 Vdc ±25%	24 Vdc ±25%
	(18 Vdc ... 24 Vdc ... 30 Vdc)	(18 Vdc ... 24 Vdc ... 30 Vdc)	(18 Vdc ... 24 Vdc ... 30 Vdc)
Power consumption	< 1.5 W at I <sub>out</sub> = 20 mA	< 1.5 W at I <sub>out</sub> = 20 mA	< 1.3 W at I <sub>out</sub> = 5 mA
Current carrying capacity of cross-connection	2 A	2 A	2 A
Operating temperature	0 °C...+55 °C (mounted on horizontal DIN rail)	0 °C...+55 °C (mounted on horizontal DIN rail)	0 °C...+55 °C (mounted on horizontal DIN rail)
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L/H/W	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.49 in.)	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.49 in.)	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.49 in.)
Approvals	CE, cULus	CE, cULus	CE, cULus

## Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Oversupply category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	3 mm	3 mm	3 mm
Coupling capacity	1 nF	1 nF	1 nF
Input / output to supply			
Isolation voltage, voltage strength	4 kV <sub>eff</sub> / 1 min	4 kV <sub>eff</sub> / 1 min	4 kV <sub>eff</sub> / 1 min
Input/output to mounting rail			
Standards/Specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011

\*\* T<sub>U</sub> = 23 °C single module

\* Input/Output 4 ... 20 mA/4 ... 20 mA possible


# DC/DC-Signal Conditioners 3-way-isolation 10 Hz

## WAVEANALOG DC/DC

- 3-way-isolation
- Analog signal conditioning
- Indication LED
- Cross-connectable voltage supply via cross-connectors

## CCC

4 ... 20 mA / 0 ... 20 mA

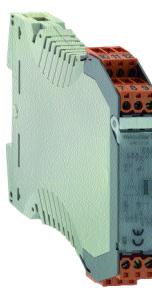

## CVC




4 ... 20 mA / 0 ... 10 V



## Approvals:



## Schematic circuit diagram

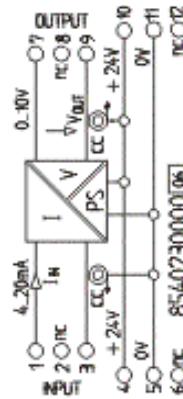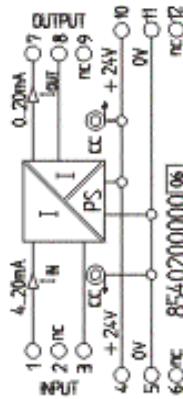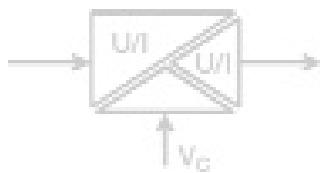

## Ordering data

Screw connection	
Tension clamp connection	
Input/Output	

## Type

WAS5 CCC	Part No.
WAZ5 CCC	8540200000

## Type

WAS5 CVC	Part No.
WAZ5 CVC	8540230000

4 ... 20 mA / 0 ... 10 V

## Technical data

### Input signal

4 ... 20 mA

4 ... 20 mA

Input current max.

25 mA

25 mA

Input resistance

110

110

### Output signal

0 ... 20 mA

0 ... 10 V

Load resistance

600

1 k

Accuracy at Tu=23 °C

0.2%

0.2%

Temperature coefficient

± 250 ppm / K

± 250 ppm / K

Response time

45 ms

45 ms

Cut-off frequency (-3 dB)

10 Hz

10 Hz

## General Data\*

Voltage supply

24 Vdc ±25%  
(18 Vdc ... 24 Vdc ... 30 Vdc)

24 Vdc ±25%  
(18 Vdc ... 24 Vdc ... 30 Vdc)

Power consumption

< 1.5 W at Iout = 20 mA

< 1.3 W at Iout = 5 mA

Current carrying capacity of cross-connection

2 A

2 A

Operating temperature

0 °C ... +55 °C (mounted on horizontal DIN rail)

0 °C ... +55 °C (mounted on horizontal DIN rail)

Storage temperature

-20 °C ... +85 °C

-20 °C ... +85 °C

Dimensions L/H/W

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Approvals

CE, cULus

CE, cULus

## Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

300 V

Rated surge voltage

4 kV

4 kV

Oversupply category

III

III

Contamination class

2

2

Clearance and creepage distance

3 mm

3 mm

Coupling capacity

1 nF

1 nF

Input / output to supply

1 nF

1 nF

Isolation voltage, voltage strength

4 kVeff / 1 min

4 kVeff / 1 min

Input/output to mounting rail

4 kVeff / 1 min

Standards/Specifications

EN 50178

EN 50178

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082,

EN 55011

EN 55011

\*Tu = 23 °C single module


# DC/DC-Signal Conditioners 3-way-isolation 10 Hz

## WAVEANALOG DC/DC

- 3-way-isolation
- Analog signal conditioning
- Indication LED
- Cross-connectable voltage supply via cross-connectors

## VCC

0 ... 10 V / 0 ... 20 mA

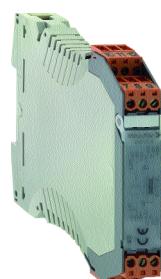


## VCC

0 ... 10 V / 4 ... 20 mA



## VVC





0 ... 10 V / 0 ... 10 V

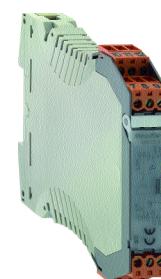

## Approvals:



## Schematic circuit diagram

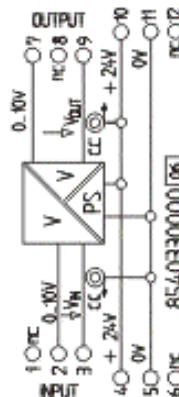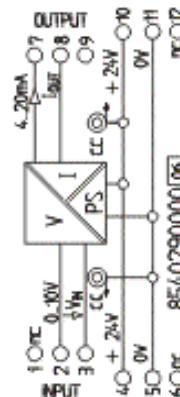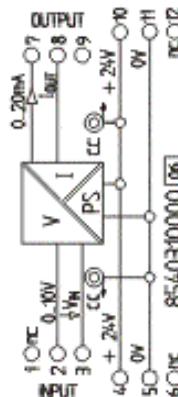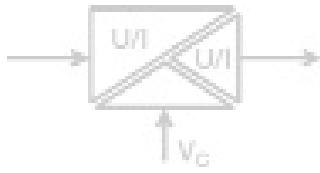

## Ordering data

Screw connection	Type	Part No.	Type	Part No.	Type	Part No.
WAS5 VCC	8540310000	WAS5 VCC	8540290000	WAS5 VVC	8540330000	
WAZ5 VCC	8540320000	WAZ5 VCC	8540300000	WAZ5 VVC	8540340000	
0 ... 10 V / 0 ... 20 mA		0 ... 10 V / 4 ... 20 mA		0 ... 10 V / 0 ... 10 V		

## Technical data\*

Input signal	0 ... 10 V	0 ... 10 V	0 ... 10 V
Input voltage max.	15 V	15 V	15 V
Input resistance	typ. 100 k	typ. 100 k	typ. 100 k
Output signal	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Load resistance	600	600	1 k
Accuracy at Tu=23 °C	0.2%	0.2%	0.2%
Temperature coefficient	± 250 ppm / K	± 250 ppm / K	± 250 ppm / K
Response time	45 ms	45 ms	45 ms
Cut-off frequency (-3 dB)	10 Hz	10 Hz	10 Hz

## General Data

Voltage supply	24 Vdc ±25% (18 Vdc ... 24 Vdc ... 30 Vdc)	24 Vdc ±25% (18 Vdc ... 24 Vdc ... 30 Vdc)	24 Vdc ±25% (18 Vdc ... 24 Vdc ... 30 Vdc)
Power consumption	< 1.5 W at Iout = 20 mA	< 1.5 W at Iout = 20 mA	< 1.3 W at Iout = 5 mA
Current carrying capacity of cross-connection	2 A	2 A	2 A
Operating temperature	0 °C ... +55 °C (mounted on horizontal DIN rail)	0 °C ... +55 °C (mounted on horizontal DIN rail)	0 °C ... +55 °C (mounted on horizontal DIN rail)
Storage temperature	-20 °C ... +85 °C	-20 °C ... +85 °C	-20 °C ... +85 °C
Dimensions L/H/W	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)
Approvals	CE, cULus	CE, cULus	CE, cULus

## Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V	300 V	300 V
Rated surge voltage	4 kV	4 kV	4 kV
Oversurge category	III	III	III
Contamination class	2	2	2
Clearance and creepage distance	3 mm	3 mm	3 mm
Coupling capacity	1 nF	1 nF	1 nF
Input / output to supply			
Isolation voltage, voltage strength	4 kVeff / 1 min	4 kVeff / 1 min	4 kVeff / 1 min
Input/output to mounting rail			
Standards/Specifications	EN 50178	EN 50178	EN 50178
EMC standards	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011	EN 50081, EN 50082, EN 55011

\*Tu = 23 °C single module

## DC/DC-Signal Conditioners 3-way-isolation 20 kHz

### WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- Transmission frequency 20 kHz
- Analog signal conditioning
- Cross-connectable voltage supply via cross-connectors


### CCC HF

0 ... 20 mA / 0 ... 20 mA




### CCC HF

0 ... 20 mA / 4 ... 20 mA

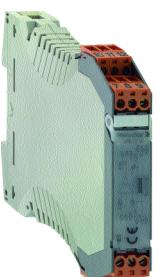

### CVC HF





0 ... 20 mA / 0 ... 10 V

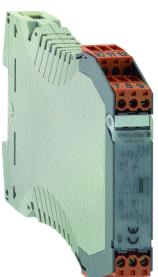

### Approvals:



### Schematic circuit diagram

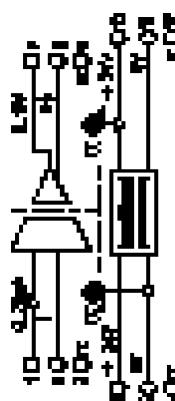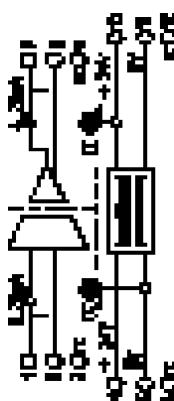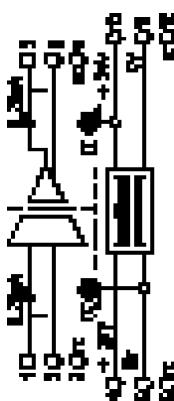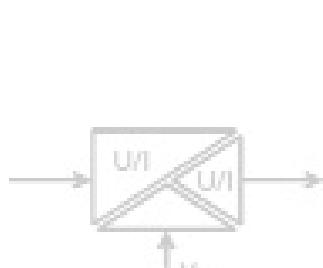

### Ordering data

Screw connection

Type Part No.

Tension clamp connection

WAS5 CCC HF 8447160000\*

Input/Output

WAZ5 CCC HF 8447170000\*

0 ... 20 mA / 0 ... 20 mA

Type Part No.

WAS5 CCC HF 8447190000

0 ... 20 mA / 4 ... 20 mA

Type Part No.

WAS5 CVC HF 8447220000

0 ... 20 mA / 0 ... 10 V

### Technical data\*\*

#### Input signal

0 ... 20 mA

Input current max.

50 mA

Input resistance

50

#### Output signal

0 ... 20 mA

Load resistance

500

Accuracy at Tu=23 °C

< 0.2% of full scale value

Temperature coefficient

250 ppm / K of full scale value

Response time

40 µs (typ. 30 µs)

Cut-off frequeny (-3 dB)

15 kHz (typ. 20 kHz)

0 ... 20 mA

50 mA

50

0 ... 10 V

2 k

< 0.2% of full scale value

250 ppm / K of full scale value

40 µs (typ. 30 µs)

15 kHz (typ. 20 kHz)

### General Data

Voltage supply

24 Vdc ±25% (18 ... 30 Vdc)

Power consumption

< 1.5 W at Iout = 20 mA

Current carrying capacity of cross-connection

2 A

Operating temperature

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

Dimensions L/H/W

92.4 / 112.5 / 17.5 mm

(3.64 / 4.43 / 0.69 in.)

CE, cULus, CSA

24 Vdc ±25% (18 ... 30 Vdc)

< 1.3 W at Iout = 5 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

92.4 / 112.5 / 17.5 mm

(3.64 / 4.43 / 0.69 in.)

CE, cULus, CSA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

Rated surge voltage

4 kV

Overvoltage category

III

Contamination class

2

Clearance and creepage distance

3 mm

Coupling capacity

3 mm

Input / output to supply

1 nF

Isolation voltage, voltage strength

4 kV<sub>eff</sub> / 1 min

Input/output to mounting rail

4 kV<sub>eff</sub> / 1 min

Standards/Specifications

EN 50178

EMC standards

EN 50081, EN 50082,

EN 55011

300 V

4 kV

III

2

3 mm

1 nF

4 kV<sub>eff</sub> / 1 min

EN 50178

EN 50081, EN 50082,

EN 55011

\*\*Tu = 23 °C single module

\* Input/output 4 ... 20 mA/4 ... 20 mA possible

## DC/DC-Signal Conditioners 3-way-isolation 20 kHz

### WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- Transmission frequency 20 kHz
- Analog signal conditioning
- Cross-connectable voltage supply via cross-connectors

### CCC HF

4 ... 20 mA / 0 ... 20 mA



### CVC HF




4 ... 20 mA / 0 ... 10 V



### Approvals:



Schematic circuit diagram

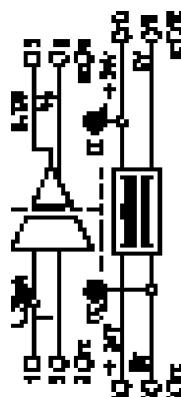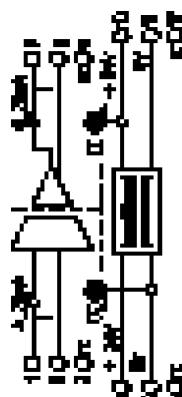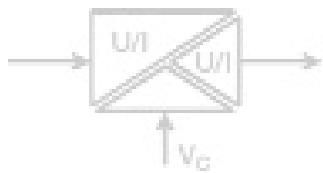

### Ordering data

Screw connection

Type

Tension clamp connection

Part No.

Input/Output

WAS5 CCC HF

Type

Part No.

4 ... 20 mA / 0 ... 20 mA

8447250000

WAS5 CVC HF

8447280000

### Technical data\*

#### Input signal

4 ... 20 mA

Input current max.

50 mA

Input resistance

50

#### Output signal

0 ... 20 mA

Load resistance

500

Accuracy at Tu=23 °C

< 0.2% of full scale value

Temperature coefficient

250 ppm / K of full scale value

Response time

40 µs (typ. 30 µs)

Cut-off frequency (-3 dB)

15 kHz (typ. 20 kHz)

4 ... 20 mA

50 mA

50

0 ... 10 V

2 k

< 0.2% of full scale value

250 ppm / K of full scale value

40 µs (typ. 30 µs)

15 kHz (typ. 20 kHz)

### General Data

Voltage supply

24 Vdc ±25% (18 ... 30 Vdc)

Power consumption

< 1.5 W at Iout = 20 mA

Current carrying capacity of cross-connection

2 A

Operating temperature

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

Dimensions L/H/W

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Approvals

CE, cULus, CSA

24 Vdc ±25% (18 ... 30 Vdc)

< 1.3 W at Iout = 5 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

CE, cULus, CSA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

300 V

Rated surge voltage

4 kV

4 kV

Overvoltage category

III

III

Contamination class

2

2

Clearance and creepage distance

3 mm

3 mm

Coupling capacity

1 nF

1 nF

Input / output to supply

1 nF

1 nF

Isolation voltage, voltage strength

4 kVeff / 1 min

4 kVeff / 1 min

Input/output to mounting rail

EN 50178

EN 50178

Standards/Specifications

EN 50081, EN 50082,

EN 50081, EN 50082

EMC standards

EN 55011

EN 55011

\*Tu = 23 °C single module

## DC/DC-Signal Conditioners 3-way-isolation 20 kHz

### WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- Transmission frequency 20 kHz
- Analog signal conditioning
- Cross-connectable voltage supply via cross-connectors


### VCC HF

0 ... 10 V / 0 ... 20 mA



### VCC HF




0 ... 10 V / 4 ... 20 mA

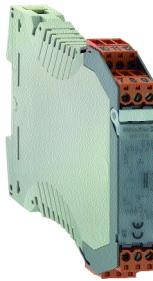

### Approvals:



Schematic circuit diagram

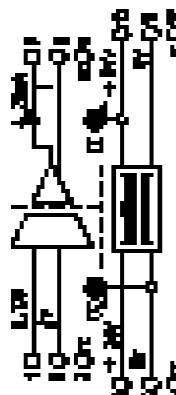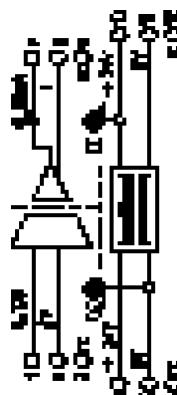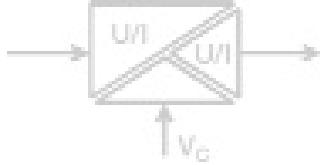

### Ordering data

Screw connection

Type

Type

Part No.

Tension clamp connection

WAS5 VCC HF

WAS5 VCC HF

Part No.

Input/Output

8447310000

8447340000

0 ... 10 V / 0 ... 20 mA

WAZ5 VCC HF

WAZ5 VCC HF

0 ... 10 V / 4 ... 20 mA

8447350000

### Technical data\*

#### Input signal

0 ... 10 V

0 ... 10 V

Input voltage max.

15 V

15 V

Input resistance

500 k

500 k

#### Output signal

0 ... 20 mA

0 ... 20 mA

Load resistance

500

500

Accuracy at Tu=23 °C

± 0.2% of full scale value

± 0.2% of full scale value

Temperature coefficient

250 ppm / K of full scale value

250 ppm / K of full scale value

Response time

40 µs (typ. 30 µs)

40 µs (typ. 30 µs)

Cut-off frequency (-3 dB)

15 kHz (typ. 20 kHz)

15 kHz (typ. 20 kHz)

### General Data

Voltage supply

24 Vdc ±25% (18 ... 30 Vdc)

24 Vdc ±25% (18 ... 30 Vdc)

Power consumption

< 1.5 W at Iout = 20 mA

< 1.5 W at Iout = 20 mA

Current carrying capacity of cross-connection

2 A

2 A

Operating temperature

0 °C ... +55 °C

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

-20 °C ... +85 °C

Dimensions L/H/W

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Approvals

CE, cULus, CSA

CE, cULus, CSA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage

300 V

300 V

Rated surge voltage

4 kV

4 kV

Oversurge category

III

III

Contamination class

2

2

Clearance and creepage distance

3 mm

3 mm

Coupling capacity

1 nF

1 nF

Input / output to supply

Isolation voltage, voltage strength

4 kVeff / 1 min

4 kVeff / 1 min

Input/output to mounting rail

Standards/Specifications

EN 50178

EN 50178

EMC standards

EN 50081, EN 50082,

EN 50081, EN 50082

EN 55011

EN 55011

\*Tu = 23 °C single module

## DC/DC-Signal Conditioners 3-way-isolation 20 kHz

### WAVEANALOG DC/DC 20 kHz

- 3-way-isolation
- Transmission frequency 20 kHz
- Analog signal conditioning
- Cross-connectable voltage supply via cross-connectors

### VVC HF

0 ... 10 V / 0 ... 10 V




### VVC HF

-10 ... +10 V / -10 ... +10 V



Schematic circuit diagram

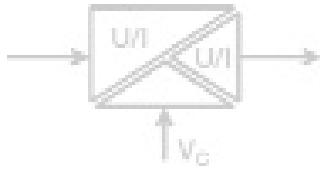

#### Approvals:



#### Approvals:



#### Ordering data

Schraubanschluß  
Zugfederanschluß  
Input/Output

#### Type

WA5 VVC HF  
WA5 VVC HF  
0 ... 10 V / 0 ... 10 V

#### Part No.

8447370000  
8447380000  
±10 V / ±10V

#### Type

WAS5 VVC HF  
WAZ5 VVC HF  
±10 V / ±10V

#### Part No.

8561610000

8587000000

#### Technical data\*

##### Input signal

Input voltage max.

Input resistance

##### Output signal

Load resistance

Accuracy at Tu=23 °C

Temperature coefficient

Response time

Cut-off frequency (-3 dB)

0 ... 10 V

15 V

500 k

0 ... 10 V

2 k

± 0.2% of full scale value

250 ppm / K of full scale value

40 µs (typ. 30 µs)

15 kHz (typ. 20 kHz)

-10 ... +10 V

± 15 V

500 k

-10 ... +10 V

2 k

± 0.2% of measurement range

250 ppm / K of measurement range

40 µs (typ. 30 µs)

15 kHz (typ. 20 kHz)

#### General Data

Voltage supply

Power consumption

Current carrying capacity of cross-connection

Operating temperature

Storage temperature

Dimensions L/H/W

Approvals

24 Vdc ±25% (18 ... 30 Vdc)

< 1.3 W at Iout = 5 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

CE, cULus, CSA

24 Vdc ±25% (18 ... 30 Vdc)

< 1.3 W at Iout = 5 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

CE, cULus

#### Coordination of insulation according to EN 50178, 04/98

Rated voltage

Rated surge voltage

Oversupply category

Contamination class

Clearance and creepage distance

Coupling capacity

Input / output to supply

Isolation voltage, voltage strength

Input/output to mounting rail

300 V

4 kV

III

2

3 mm

1 nF

4 kVeff / 1 min

300 V

4 kV

III

2

3 mm

1 nF

4 kVeff / 1 min

EN 50178

EN 50081, EN 50082,

EN 55011

\*Tu = 23 °C single module

# ADVANTAGES ...

The **WAVEANALOG PRO** is a universal, isolating signal conditioner that converts current and voltage signals to standard signals in accordance with IEC 381. **WAVEANALOG PRO** settings are easily carried out via DIP switches; an additional calibration is no longer necessary, although possible, to enable adjustments to be made to the signal. The software "**WAVETOOL**" is available to provide support when making the settings. Wavetool describes the necessary steps to configure the module once the required input and output ranges have been entered.

The **WAVEANALOG PRO** is supplied with power via an internal, wide voltage-range power supply unit; thus increase the flexibility and use anywhere in the system.

Product features:

Wide voltage-range power supply unit from 20...253Vac/dc

Extremely slim design,  
12.6 mm mounting width

Low power loss

Operates independent of  
mounting position

440 pre-programmed configurations

Input signals:  
voltage: 20mV...200Vdc,  
current: 1mA...50mA, uni and bipolar

Output signals:  
voltage : max.  $\pm$  10V;  
current : max.  $\pm$  20 mA

The offline configuration assistant  
"**WAVETOOL**" supports the  
configuration and creates  
module-specific documentation

Operation indicator LED

Fine calibration via switchable  
potentiometers possible

Selectable transmission frequency  
between 10Hz and 10 kHz enables  
response time to be optimized


Further features  
**WAVEBOX**

Approvals:

Protective separation according to  
EN 50178

## WAVETOOL

The service tool enables fast and uncomplicated configuration of the **WAVEANALOG PRO**. By simply entering the required input and output parameters, the program determines the correct switch settings and gives instructions for correctly connecting the module. If required, the necessary values for a calibration can be ascertained and displayed. The entire process can be printed out for installation documentation purposes.

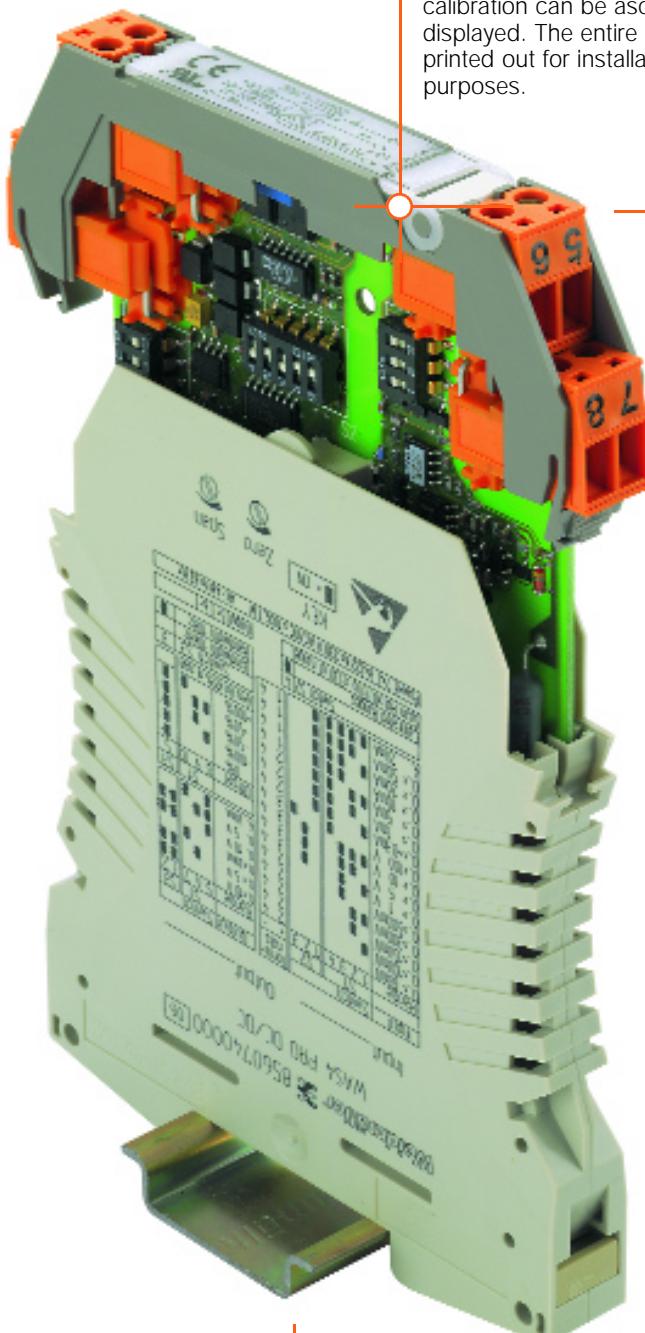

## Setting

440 pre-configured input and output settings can easily be selected via DIP switches. It is also possible to alter the transmission frequency via DIP switches. A further calibration is no longer necessary for the pre-programmed ranges.

Download:  
[www.weidmuller.com](http://www.weidmuller.com)  
 Products  
 Downloads



WAVE tool  
for signal isolator WAVEanalog PRO RTD

Weidmüller DE


**Note:** Weidmüller Interface GmbH

**Input:** Type: PT1000 4-wire  
Min value: 0 mΩ  
End value: 10000 mΩ

**Output:** Output voltage: 0 ... 10 V  
Response time: slow 2.0s  
Fine calibration: off

**Settings:** Adjust switches

Terminal 1: RTD+ (sense)  
 Terminal 2: Sense  
 Terminal 3: RTD- (sense)  
 Terminal 4: Sense  
 Terminal 5: Output 0 ... 10 V  
 Terminal 6: Gnd  
 Terminal 10: Power supply +18 ... 26 V DC  
 Terminal 11: Gnd

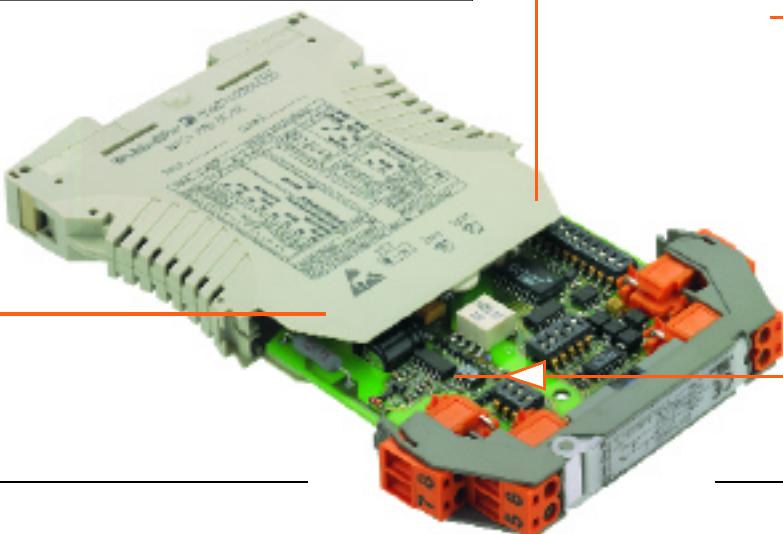

#### Wide-range power supply unit

The wide-range power supply unit in the WAVEANALOG PRO DC/DC makes it possible to use the module in all common voltage supply systems worldwide. The module can be operated with DC or AC voltages from 20 to 253 V. The AC voltages can be in the 48...62 Hz range.

#### Switchable fine calibration

To be able to set the module to suit applications with ranges other than the pre-programmed ranges, the WAVEANALOG PRO DC/DC offers the option of switching in zero and span potentiometers via DIP switches. This allows the span to be adjusted by  $\pm 25\%$  of the measuring span of the selected output range and the zero to 0.3...3.33 x end value of the selected input range.

# DC/DC-Signal Conditioners - configurable


## WAVEANALOG PRO DC/DC

- Universally adjustable by DIP-switches
- Adjustment help via Internet
- 3-way-isolation
- Voltage supply from 20 - 230 V ac/dc
- Low power loss
- Adjustable transmission frequency
- Indication LED

### Approvals:



Schematic circuit diagram



### Ordering data

Screw connection

Tension clamp connection

Input/Output

### Technical data\*

#### Input (adjustable)

Voltage uni-/bipolar adjustable

Voltage calibrated ranges

Current uni-/bipolar adjustable

Current calibrated ranges

Input resistance

at current input range < 5 mA / > 5 mA

at voltage input

Input capacity

at current input

Voltage input range < 500 mV / > 500 mV

Overload capacity

at current input range < 5 mA / > 5 mA

at voltage input range < 500 mV / > 500 mV

#### Output (adjustable)

Voltage uni-/bipolar adjustable

Voltage calibrated ranges

Current uni-/bipolar adjustable

Current calibrated ranges

Offset

Load resistance

at output current

at output voltage

Offset

Residual ripple

Adjustment zero pot.

Adjustment span pot.

Gain error

Temperature coefficient

Cut-off frequency

### General Data

Voltage supply

Power consumption

Frequency range

Operating temperature

Storage temperature

Factory setting

Dimensions L/H/W

Weight

Approvals

#### Coordination of insulation according to EN 50178, 04/98

Rated voltage

Rated surge voltage

Oversupply category

Contamination class

Test voltage

Standards/specifications

EMC standards

## PRO DC/DC



### Adjustment help WAVETool

The service tool enables quick and uncomplicated configuration of WAVEANALOG PRO. Download from Internet:  
www.weidmuller.com

Products

Downloads (see page 29)

### Switch position/setting options

Input	S1	Switch			
		1	2	3	4
Input range					
0 ... ±60 mV	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
0 ... ±100 mV	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±150 mV	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±300 mV	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±500 mV	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±1 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±5 V	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±10 V	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±100 V	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
0 ... ±~0.3 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±1 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±5 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±10 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±20 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±50 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 ... ±20 mA*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

\*Offset conversion not calibrated

### Switch S2 4

calibrated ranges

Span pot. activated: input range x 0.33 ... x 3.30

Output	Switch			
	S1	S2	S3	S4
Output range	5	6	7	1 2
0 ... ±10 V	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2 ... 10 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±5 V	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1 ... 5 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0 ... ±20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4 ... 20 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Offset	Switch		
	S1	S2	S3
(in % of output voltage)	8	9	10
0 %	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-100 %	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-50 %	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
+50 %	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
+100 %	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Zero pot. activated: additional ±25 %

Switch S3	3	
	Bandwidth 10 kHz	Bandwidth 10 Hz
Set range can be documented on side of housing.	<input type="checkbox"/>	<input checked="" type="checkbox"/>

■ = on  
□ = off

\*Tu = 23 °C single module

## DC/DC-Signal Conditioners - configurable

### MICROANALOG DC/DC select

- 3-way isolation between Input, output and supply voltage
- Calibrated selectable by DIP-switches
- Cross-connectable voltage supply via cross-connectors
- Low heat dissipation


### DC/DC select



### Approvals:



### Schematic circuit diagram



### Ordering data

Screw connection

Type Part No.

MAS DC/DC select 8594810000

Tension clamp connection

MAS DC/DC select 8594840000

### Technical data\*

#### Input (calibrated selectable)

0...10 V / 4...20 mA / 0...20 mA (factory setting)

Input resistance

< 0.1 V at 20 mA

Input voltage

100 kOhm

Overload

< 100 mA

Input current

max. 30 V, 3 mA

Input voltage

0...10 V / 4...20 mA / 0...20 mA (factory setting)

Output (selectable)

Load resistance

500 Ohm

Output current

10 kOhm

Output voltage

< 20 mV<sub>eff</sub>

Residual ripple

< 0.5 % of full scale value

Transmission error

< 150 ppm/K of full scale value

Temperature coefficient

> 100 Hz

Cut-off frequency

### General Data

Supply voltage

24 Vdc ( $\pm 15\%$ )

Power consumption

approx. 0.6 W

Operating temperature

0...+55 °C

Storage temperature

-25 °C...+85 °C

Approvals

CE, cULus

Dimensions L/H/W

88 / 98 / 6.1 mm (3.46 / 3.86 / 0.24 in.)

### Coordination of insulation according to DIN EN50178, 04/98

Rated voltage

50 V

Test voltage

500 V

Overvoltage category

II

Contamination class

2


\* Tu 20 °C

Input	Output	Switch					
		S1		S2			
1	2	1	2	3	4	5	6
0 ... 20 mA	0 ... 20 mA	■	□	□	□	■	□
0 ... 20 mA	4 ... 20 mA	■	□	□	□	■	□
0 ... 20 mA	0 ... 10 V	■	□	□	□	□	■
4 ... 20 mA	0 ... 20 mA	■	□	■	■	■	□
4 ... 20 mA	4 ... 20 mA	■	□	□	□	■	□
4 ... 20 mA	0 ... 10 V	■	□	■	■	□	■
0 ... 10 V	0 ... 20 mA	□	■	□	□	■	□
0 ... 10 V	4 ... 20 mA	□	□	■	■	□	□
0 ... 10 V	0 ... 10 V	□	■	□	□	■	■

■ = on

□ = off

### Connection

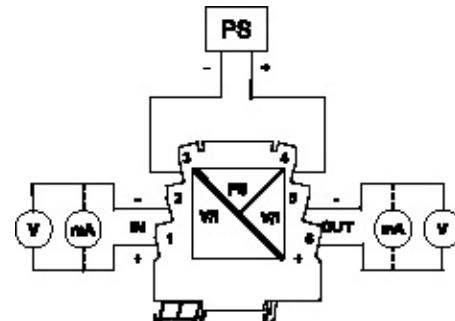


# DC Alarm Conditioners

The Setpoint Controller allows cost effective units to be built for monitoring analog signals. An upper and lower limit value, which covers the entire signal range, can be set by the user via 2 potentiometers. The respective statuses of the upper and lower limit value are indicated at the 2 digital outputs (upper limit value under/over flow; lower limit value under/over flow).

## Approvals:




Schematic circuit diagram

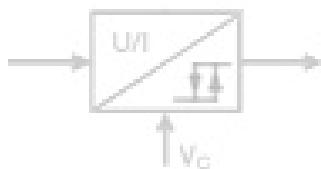


## Ordering data

for TS 35

## MCZ SC 0...10 Vdc

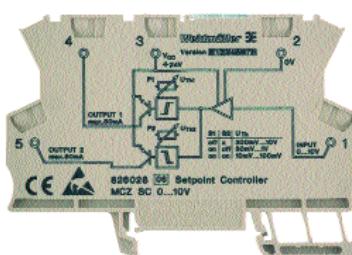

## MCZ SC 0...20 mA

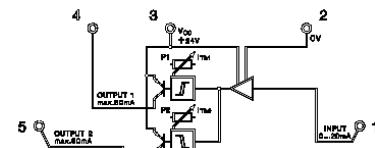

## Technical data

### Voltage supply

Supply voltage

Type	Part No.
MCZ SC 24 V/0...10V	8260280000

Type	Part No.
MCZ SC 24 V/0...20 mA	8227350000

Supply current

### Input

Input voltage

24 Vdc ± 20 %
15 mA

24 Vdc ± 20 %
15 mA

Input resistance

Voltage drop at full scale

max. input current

Cut-off frequency

60 k
100 Hz

0.5...20 mA
50

Temperature coefficient  $T_k$

Threshold voltage ranges of  $U_{th}$

	S1	S2	Temperature coefficient $T_k$
10...100 mV	on	on	500 ppm max.
0.03...1 V	on	off	250 ppm max.
0.3...10 V	off	x	250 ppm max.

Temperature coefficient  $T_k$  250 ppm max.

Setting of switching threshold

Hysteresis of switching threshold

via 2 potentiometers (12 turns)

via 2 potentiometers (12 turns)

Function of output 1

1 % of full scale value

1 % of full scale value

Function of output 2

active High for  $U_{input} < U_{th1}$  (set via P1)

active High for  $U_{input} > U_{th2}$  (set via P2)

Response time

active High for  $U_{input} > U_{th2}$  (set via P2)

< 250 µs (switch threshold at 90% of the max. input signal;

$R_L = 1 \text{ k } \Omega$ )

$R_L = 1 \text{ k } \Omega$ )

### Output

Output current per output

2 channel switching PNP

2 channel switching PNP

Voltage drop at output transistor

max. 50 mA

max. 50 mA

< 1.2 V at 50 mA

< 1.2 V at 50 mA

< 1.2 V at 50 mA

## Insulation coordination/safe separation to EN 50178

Separation input / output

none

none

Dielectric strength I/O to mounting rail

4 kVeff / 1 min

4 kVeff / 1 min

Ambient temperature

0 °C ... +50 °C

0 °C ... +50 °C

Storage temperature

-25 °C ... +60 °C

-25 °C ... +60 °C

Conductor

AWG 22...12

AWG 22...12

Conductor cross-section

1.5 mm<sup>2</sup>

1.5 mm<sup>2</sup>

Approvals

CE, cULus, CSA

CE, cULus, CSA

Overall width

6 mm (0.24 in.)

6 mm (0.24 in.)

# DC Alarm Conditioners

## WAVEANALOG DC/Alarm

- 3-way-isolation
- Low trip / high trip
- FAILSAFE / NON FAILSAFE
- 1 relay per setpoint 250V ac @ 3A



## DC/Alarm



### Approvals:



### Schematic circuit diagram

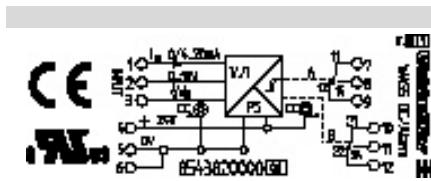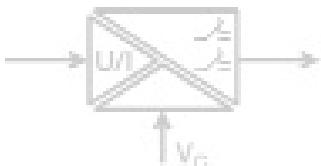

Function	SW 1	1	2	3	4
Channel A High Trip	<input checked="" type="checkbox"/>				
Channel A Low Trip	<input type="checkbox"/>				
Channel B High Trip	<input checked="" type="checkbox"/>				
Channel B Low Trip	<input type="checkbox"/>				
FAILSAFE, Channel 1 & 2	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	
NON FAILSAFE, Channel 1 & 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			

■ = on  
□ = off

### Ordering data

Type	Part No.
WAS5 DC/Alarm	8543820000
WAZ5 DC/Alarm	8543880000

### Technical data\*

Input	0...10 V
Input voltage	$\geq 100$ k
Input resistance	0/4...20 mA
Input current	$\leq 110$
Output	1 relay per channel
Relay	1 change over (SPDT)
Relay type	AgNi 90/10
Contact material	253 Vac
Switching voltage	253 Vac
max. switching voltage	3 A
Permanent current ac	750 VA
Switching load ac	1 red LED per channel for alarm indication, power on: green LED
Status indication	15 x $10^6$ operations
Mechanical lifetime (Switching cycles)	10 <sup>5</sup>
Electrical lifetime (Switching cycles at max. load)	1...90% (independent for channel 1 & 2)
Threshold	1...10% (independent for channel 1 & 2)
Hysteresis	$\leq 500$ ppm/K
Temperature coefficient	max. $\pm 0.3$ % from full scale value
Repeatability	10 V or 20 mA

### Coordination of insulation according to EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance and creepage distance	3 mm
Test voltage	4 kV <sub>eff</sub>

### General Data

Supply voltage	18 Vdc...24 Vdc...30 Vdc
Power consumption	typ. 1 W both relay detected
Current carrying capacity of cross-connection	2 A
Operating temperature	0...+55 °C (mounted on horizontal DIN rail)
Storage temperature	-20 °C...+85 °C
Standards/Specifications	EN 50178
EMC standards	EN 50082-2, EN 50081-1, EN 50081-2 EN 55011
Dimensions L/H/W	92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)
Weight	150 g (0.33 lbs.)
Approvals	CE, cULus

\* Tu 23 °C, single module

NON FAILSAFE: The relay picks up when the alarm is triggered.  
FAILSAFE: The relay drops out when the alarm is triggered.

An alarm is also triggered in the FAILSAFE mode, if for example, the operating voltage to the module fails.

Low trip: Alarm is triggered if the signal is undershoot the threshold.


High trip: Alarm is triggered if the signal is overshoot the threshold.

Signal threshold: Adjustments of the signal threshold (1...90 %) are made for channel 1 with the potentiometer P1, and separately for channel 2 via potentiometer P2.


Hysteresis: Adjustments of the hysteresis (1...90 %) are made for channel 1 with the potentiometer P3, and separately for channel 2 via potentiometer P4.

## WAVEANALOG DC/Alarm – Alarm indication

### Example 1

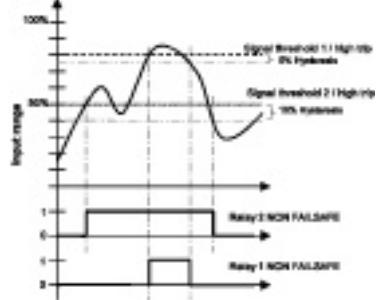

### Example 2

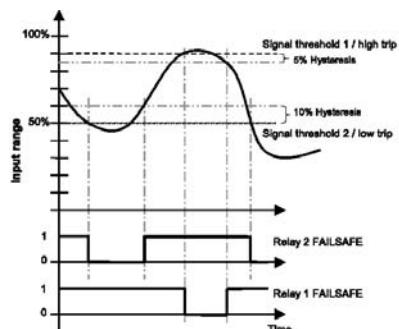


### Signal monitoring and temperature conversion

Reliable recording and monitoring of temperature is important in a number of industries. In industrial processes the point of measurement is very often some distance from the point of the measured value process, for example in the case of melting and annealing furnaces a central data processing system is required. Here the measured values are fed to regulators or recording units to guarantee optimum process control. Two measurement methods are predominantly used today to record temperature in the industrial field. First the **resistance thermometer** (e.g. PT 100), which makes use of the fact that the electrical resistance of an electrical conductor varies with temperature, a distinction being made between cold and hot conductors. For an exact temperature measurement the resistance value

must be recorded, linearized and converted to a temperature-proportional analog signal. Here a distinction is made between 2-, 3- and 4-wire temperature records. The applications of these different versions depend essentially on the distance between the measuring point and the place where the signals are further processed. Second, there are **thermocouples**. Here use is made of the effect that a voltage, which increases with temperature, is generated at the point of connection between two different metals. They have the distinct advantage over resistance thermometers that they have a higher upper temperature limit of up to several thousand degrees Celsius. A common area of application includes furnaces, measurements in charges, plastic injection moulding and aluminium die casting machines

with temperatures above approximately 250° Celsius. Here signal separating converters perform an important function. First they separate signals between the harsh industrial environment and the series-connected electronics to protect against destruction. They also eliminate potential differences caused by long distances. Second they convert small temperature recorder signals to standard signals to minimize measuring errors. The sensor-specific shortcomings, such as cold point and linearization errors, are also reduced to a minimum.

Figure: Hardening shop furnace

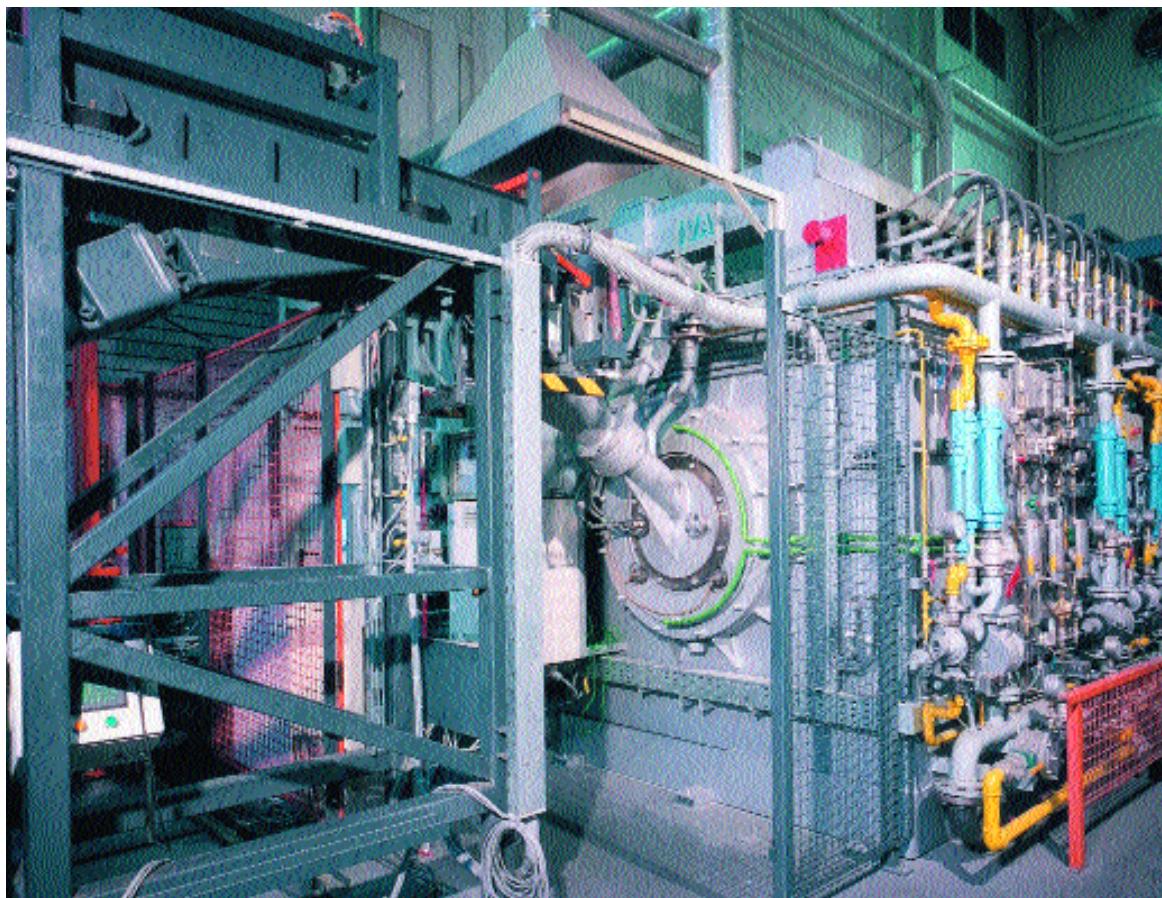

## PT100/2- /3-wire Signal Conditioners (Output loop powered)


### MCZ PT100/3 CLP

- for 2 and 3 wire sensors

The temperature module converts measurement values from a PT 100 into analog measurement signals. The module supplies the sensor with power. The module is distinguished by its accuracy and linearity.

### MCZ PT100/3 CLP


0...100 °C / 0...120 °C / 0...150 °C / 0...200 °C / 0...300 °C  
-50...+150 °C / -40...100 °C

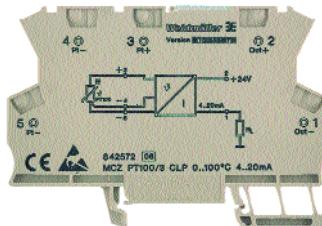

### Approvals:



### Schematic circuit diagram

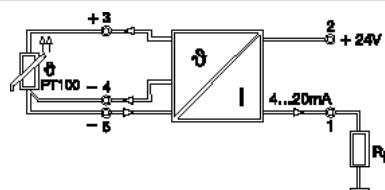

### Ordering data

for TS 35

Type	Part No.
MCZ PT100/3 CLP 0...100 °C	8425720000
MCZ PT100/3 CLP 0...120 °C	8483680000
MCZ PT100/3 CLP 0...150 °C	8604420000
MCZ PT100/3 CLP 0...200 °C	8473010000
MCZ PT100/3 CLP 0...300 °C	8473020000
MCZ PT100/3 CLP -50...+150 °C	8473000000
MCZ PT100/3 CLP -40...100 °C	8604430000

### Technical data

#### Input

Connection	3-Conductor / 2-Conductor*
Max. wire resistance	each 50
Leadwire resistance effect	max. 0.006 °C/
Supply current	0.8 mA

#### Output

Load resistance	4...20 mA**
Supply voltage	750 at 24 V
Residual ripple of supply voltage	max: 30V/min: 9V + 20mA x R <sub>L</sub>
Set time	max: 1.5 V at 100 Hz
Accuracy	10 ms
Linearity	type. 0.2 % max. 0.5 % v. FSR
Temperature coefficient	<0.1 % v. FSR
	max. ±250 ppm/°C

#### Open circuit recognition

yes

#### EMC

EMVG

EN 50081-1

EN 50082-2

#### Approvals

CE, cULus, CSA

#### Ambient temperature

0 °C...+50 °C

#### Storage temperature

-20 °C...+85 °C

#### Conductor

AWG 22...12

#### Conductor cross-section

1.5 mm<sup>2</sup>

#### Overall width

6 mm (0.24 in.)

\* Putting a bridge between Pins 4 and 5

\*\* current loop supplied



**NEW**

## PT100/2- /3-wire Signal Conditioners

### MICROANALOG PT100 Output select

- 2-way isolation between input, output and supply voltage
- PT100 2-/3-wire
- Output calibrated selectable by DIP-switches



### PT100 Output select

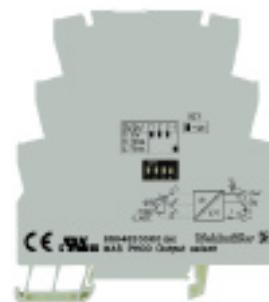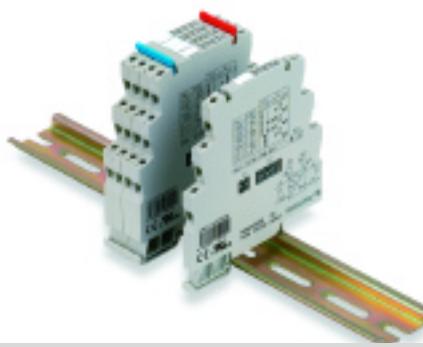

### Approvals:



### Schematic circuit diagram

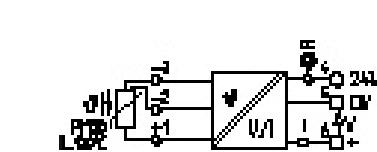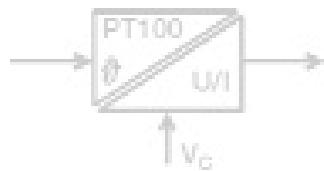

Output	Switch			
	1	2	3	4
0 ... 10 V	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
0 ... 20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 ... 20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

■ = on  
□ = off

### Ordering data

Screw connection  
Tension clamp connection

Type Part No.

MAS PT100 Output select 8594820000  
MAZ PT100 Output select 8594850000

### Technical data\*

#### Input (fix)

PT 100 2-/3-Wire  
(2-Wire-Connection by putting bridge between 2 + 3)

#### Temperature range

0...100 °C

#### Sensor current

0.8 mA

#### Output (calibrated selectable)

0...10 V / 4...20 mA / 0...5V / 0...20mA (factory setting)

#### Load resistance

< 400 Ohm @ providing 24Vdc

#### Output current

> 10 kOhm

#### Output voltage

< 0.5 % of selected range

#### Transmission error/accuracy

< 250 ppm/K of selected range

#### Temperature coefficient

< 250 ppm/K of selected range

#### Response time

< 0.7 sec.

### General Data

#### Voltage supply

24 Vdc (±10%)

#### Power consumption

approx. 0.6 W

#### Operating temperature

0...+55 °C

#### Storage temperature

-25 °C...+85 °C

#### Approvals

CE, cULus

#### Dimensions L/H/W

88 / 98 / 6.1 mm (3.46 / 3.86 / 0.24 in.)

### Coordination of insulation according to DIN EN50178, 04/98

#### Rated voltage

100 V

#### Test voltage


500 V

#### Overvoltage category

III

#### Contamination class

2

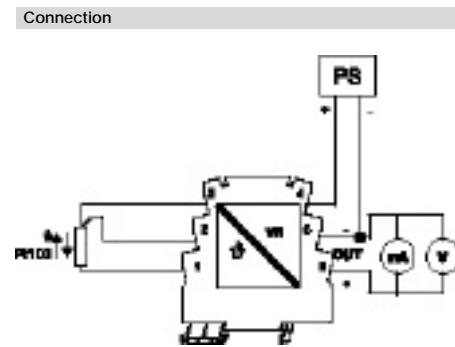

\* Tu 20 °C

# PT100/2-wire Signal Conditioners

## WAVEANALOG PT100 select

- 2-wire technology
- Configurable temperature range -200 °C ... +800 °C
- Configurable output current range 0 ... 20 mA / 4 ... 20 mA
- Cross-connectable voltage supply via cross-connectors

## PT100/2

0(4) ... 20 mA



## PT100/2




0 ... 10 V



## Approvals:



## Schematic circuit diagram

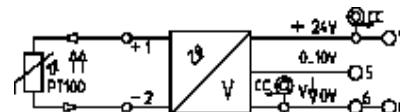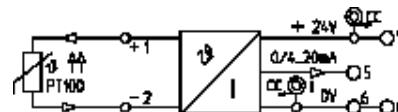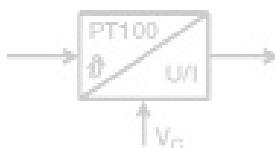

## Ordering data

Screw connection

Type

Tension clamp connection

Part No.

Input/Output

WTS4 PT100/2 C

Type

Part No.

WTZ4 PT100/2 C

WTS4 PT100/2 V

PT100/2 / 0(4) ... 20 mA

8432180000\*

PT100/2 / 0 / ... 10 V

8432190000\*

## Technical data\*\*\*

### Input signal

### PT100/2- wire

Temperature range

-200 ... +800 °C

Supply current

1.45 mA

### Output signal

0(4) ... 20 mA

Load resistance

500 Ω

Accuracy at Tu=23 °C

± 0.5% of measurement range

Temperature coefficient

200 ppm / °C (typ. 80 ppm / °C)

100 K measurement range < 200 K

250 ppm / °C (typ. 100 ppm / °C)

40 K measurement range < 100 K

500 ppm / °C

## General Data

Voltage supply

24 Vdc ±20% (19.2 ... 28.8 Vdc)

Power consumption

< 48 mA at Iout = 20 mA

Current carrying capacity of cross-connection

2 A

Operating temperature

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

Standards/specifications

EN 50178, IEC 751

EMC standards

EN 50081, EN 50082, EN 55011

Dimensions L/H/W

92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)

Approvals

CE, cULus, CSA


\* without balancing

\*\* Tu = 23 °C single module

## Example for Zero and Span

### Temperature adjustment:

Tmin -10 °C

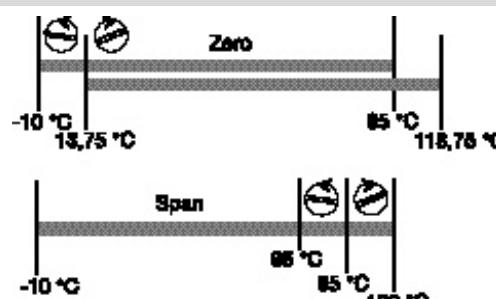

Span 75 ... 110 °C

Span 95 °C

Adjustment of Span + 25 %

## Preconfigured modules

	Input	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Screw connection	0 ... 100 °C	8432210001	8432210011	8432180001
	special balancing	8432219999**	8432219999**	8432189999**
Tension clamp connection	0 ... 100 °C	8432220001	8432220011	8432190001
	special balancing	8432229999**	8432229999**	8432199999**

\*\*You must indicate the temperature range when ordering

## Switch position/setting options

Tmin	1	2	3	Span	4	5	6
0 °C*	■	■	■	40 ... 50 °C	■	■	■
-10 °C	■	■	□	50 ... 75 °C	■	■	□
-20 °C	■	□	■	75 ... 110 °C	■	□	■
-40 °C	□	■	□	110 ... 165 °C	■	□	□
-60 °C	□	■	■	165 ... 245 °C	□	■	■
-80 °C	□	■	□	245 ... 360 °C	□	■	□
-100 °C	□	□	■	360 ... 540 °C	□	□	■
-200 °C	□	□	□	540 ... 800 °C	□	□	□

\*) only modules with current output

Range	7
0 ... 20 mA	□
4 ... 20 mA	■

■ = on  
□ = off

## Aids

- Voltage supply 24 Vdc, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of >0.1 % of the end value.

# PT100/3-wire Signal Conditioners


## WAVEANALOG PT100 select

- 3-wire technology
- Configurable temperature range -200 °C ... +800 °C
- Configurable output current range 0 ... 20 mA / 4 ... 20 mA
- Cross-connectable voltage supply via cross-connectors

## Approvals:



## Schematic circuit diagram




## PT100/3

0(4) ... 20 mA



## PT100/3

0 ... 10 V

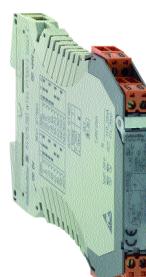

## Ordering data

Screw connection	WTS4 PT100/3 C	Part No.	8432150000*
Tension clamp connection	WTZ4 PT100/3 C	Part No.	8432160000*
Input/Output	PT100/3 / 0(4) ... 20 mA		

## Type

WTS4 PT100/3 C

WTZ4 PT100/3 C

PT100/3 / 0(4) ... 20 mA

## Technical data\*\*\*

### Input signal

Temperature range

Supply current

Conductor resistance

### Output signal

Load resistance

Accuracy at Tu=23 °C

Temperature coefficient

Measurement range 200 K

100 K measurement range < 200 K

40 K measurement range < 100 K

## PT100/3- wire

-200 ... +800 °C

1.45 mA

50

0(4) ... 20 mA

500

± 0.5% of measurement range

200 ppm / °C (typ. 80 ppm / °C)

250 ppm / °C (typ. 100 ppm / °C)

500 ppm / °C (typ. 200 ppm / °C)

## General Data

Voltage supply

24 Vdc ±20% (19.2 ... 28.8 Vdc)

Power consumption

< 48 mA at Iout = 20 mA

Current carrying capacity of cross-connection

2 A

Operating temperature

0 °C ... +55 °C

Storage temperature

-20 °C ... +85 °C

Standards/specifications

EN 50178, IEC 751

EMC standards

EN 50081, EN 50082, EN 55011

Dimensions L/H/W

92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)


Approvals

CE, cULus, CSA

\* without balancing

\*\* Tu = 23 °C single module

## Example for Zero and Span

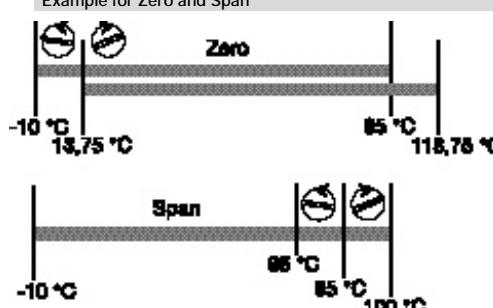

## Temperature adjustment:

Tmin	-10 °C
Span	75 ... 110 °C

## Preconfigured modules

	Input	0 ... 20 mA	4 ... 20 mA	0 ... 10 V	Output
Screw connection	0 ... 100 °C	8432150001	8432150011	8432090001	
	special balancing	8432159999**	8432159999**	8432099999**	
Tension clamp connection	0 ... 100 °C	8432160001	8432160011	8432130001	
	special balancing	8432169999**	8432169999**	8432139999**	

\*\* You must indicate the temperature range when ordering

Please indicate additional output signal of current output

## Tmin

0 °C

-10 °C

-20 °C

-40 °C

-60 °C

-80 °C

-100 °C

-200 °C

## Span

40 ... 50 °C

50 ... 75 °C

75 ... 110 °C

110 ... 165 °C

165 ... 245 °C

245 ... 360 °C

360 ... 540 °C

540 ... 800 °C

## 4

5

6

\*) only modules with current output

## Range

0 ... 20 mA

4 ... 20 mA

■ = on

□ = off

## Aids

- Voltage supply 24 Vdc, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of >0.1 % of the end value.

## PT100/2- /3- /4-wire Signal Conditioners


### WAVEANALOG PT100 select

- 2-, 3- and 4-wire technology
- Configurable temperature range -200 °C ... +800 °C
- Configurable output current range 0 ... 20 mA / 4 ... 20 mA
- Cross-connectable voltage supply via cross-connectors

### Approvals:



### Schematic circuit diagram




### PT100/4

0(4) ... 20 mA



### PT100/4

0 ... 10 V

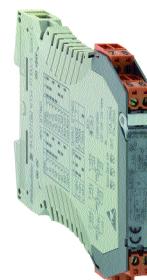

### Ordering data

Screw connection

Tension clamp connection

Input/Output

### Technical data\*\*\*

#### Input signal

Temperature range

Supply current

Conductor resistance

#### Output signal

Load resistance

Accuracy at Tu=23 °C

100 K measurement range < 600 K

Measurement range 100 K

Measurement range 600 K

Temperature coefficient

Measurement range 200 K

100 K measurement range < 200 K

40 K measurement range < 100 K

#### General Data

Voltage supply

Power consumption

Current carrying capacity of cross-connection

Operating temperature

Storage temperature

Standards/specifications

EMC standards

Dimensions L/H/W

Approvals

\* without balancing

\*\* Tu = 23 °C single module

### Type

WTS4 PT100/4 C 8432270000\*

WTZ4 PT100/4 C 8432280000\*

PT100/4 / 0(4) ... 20 mA

### PT100/4-wire

-200 ... +800 °C

1.45 mA

50 (3- & 4-wire)

0(4) ... 20 mA

500

± 0.1% of measurement range

± 0.1 K

± 0.2% of measurement range

200 ppm / °C (typ. 80 ppm / °C)

225 ppm / °C (typ. 90 ppm / °C)

450 ppm / °C (typ. 180 ppm / °C)

24 Vdc ±20% (19.2 ... 28.8 Vdc)

< 48 mA at Iout = 20 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

EN 50178, IEC 751

EN 50081, EN 50082, EN 55011

92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)

CE, cULus, CSA

### Type

WTS4 PT100/4 V 432240000\*

WTZ4 PT100/4 V 432250000\*

PT100/4 / 0 ... 10 V

### PT100/4-wire

-200 ... +800 °C

1.45 mA

50 (3- & 4-wire)

0 ... 10 V

1 k

± 0.1% of measurement range

± 0.1 K

± 0.2% of measurement range

200 ppm / °C (typ. 80 ppm / °C)

225 ppm / °C (typ. 90 ppm / °C)

450 ppm / °C (typ. 180 ppm / °C)

24 Vdc ±20% (19.2 ... 28.8 Vdc)

< 38 mA at Iout = 10 mA

2 A

0 °C ... +55 °C

-20 °C ... +85 °C

EN 50178, IEC 751

EN 50081, EN 50082, EN 55011

92.4 / 112.5 / 12.5 mm (3.64 / 4.43 / 0.49 in.)

CE, cULus, CSA

### Switch position/setting options

	Tmin	1	2	3	Span	4	5	6
0 °C*	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	40 ... 50 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-10 °C*	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	50 ... 75 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-20 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	75 ... 110 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-40 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	110 ... 165 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-60 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	165 ... 245 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-80 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	245 ... 360 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-100 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	360 ... 540 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-200 °C*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	540 ... 800 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


### Output 1)

Range	7	8	9	10
0 ... 20 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 ... 20 mA	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		2 - wire	3 - wire	4 - wire

1) only modules with current output      ■ = on  
    □ = off

### Aids

- Voltage supply 24 Vdc, 50 mA
- Simulator for PT 100 or precision-resistance-decade
- Ampere-/voltmeter which can be calibrated to an accuracy of >0.1 % of the end value.

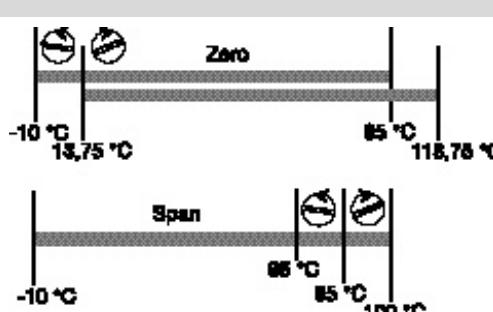

### Preconfigured modules

	Input	0 ... 20 mA	4 ... 20 mA	0 ... 10 V
Screw connection	0 ... 100 °C	8432270001	8432270011	8432240001
	special balancing	8432279999**		8432249999**
Tension clamp connection	0 ... 100 °C	8432280001	8432280011	8432250001
	special balancing	8432289999**		8432259999**

\*\* Please indicate the temperature range and the sensor type (2-, 3- or 4-wire).

Please indicate additional output signal of current output

## RTD-Signal Conditioner (configurable)


### WAVEANALOG PRO RTD

- Measurement from PT 100 (PRO RTD), measurement from PT 1000 (PRO RTD 1000) Ni 100, R, potentiometer
- Universally adjustable by DIP switches
- 3-way-isolation
- status LED
- Linearization
- Cross-connectable voltage supply via cross-connectors

### Approvals:



### Schematic circuit diagram



### PRO RTD



### PRO RTD1000



### Ordering data

Screw connection

Tension clamp connection

Input/Output

### Technical data\*

#### Input (adjustable)

#### Type

Part No.

WAS5 PRO RTD 8560700000

WAS5 PRO RTD 8560710000

configurable

PT100/2-/3-/4-wire: -200°C to 850°C

Ni100: -60°C to +250°C

Potentiometer: min: 0...100 / max: 0...100 k

Resistance: 0 ... 450

#### Type

Part No.

WAS5 PRO RTD 1000 8679490000

on request

PT1000/2-/3-/4-wire: 200°C to 850°C

Ni1000: -60°C to + 250°C

Potentiometer: min: 0...1 k / max: 0...100 k

Resistance : 0 ... 4500

#### Output (adjustable)

Output voltage

0...10 V

0...10 V

Offset voltage

max. 0.05 V

max. 0.05 V

Load resistance

1 k

1 k

Output current

0/4 ... 20 mA

0/4 ... 20 mA

Offset current

max. 100 µA

max. 100 µA

Load resistance

600

600

Accuracy, slow/fast step response

PT 100, Ni 100: 0.3% of measurement range 0.8%,

PT 100, Ni 100: 0.3% of measurement range 0.8%,

#### Step response (selectable by DIP-switches)

RTD, R

< 1.2 s

< 1.2 s

Potentiometer

< 500 ms

< 500 ms

Temperature coefficient measurement range < 200 K

< 2.2 s

< 2.2 s

100 K measurement range < 200 K

200 ppm / °C

200 ppm / °C

40 K measurement range < 100 K

250 ppm / °C

250 ppm / °C

50 for 3- and 4-wire

400 ppm / °C

Max. wire resistance:

max. + 0.25°C at 50 wire resistance

50 for 3- and 4-wire

Influence of wire resistances:

max. + 0.25°C at 50 wire resistance

max. + 0.25°C at 50 wire resistance

Open circuit recognition:

Output signal > 10 V or > 20 mA, LED flashing

Output signal > 10 V or. > 20 mA, LED flashing

Range of man. fine adjustment (switchable)

± 5%, from ver. 1: 12.5%, potentiometer 12.5 %...25

± 5%, ab Ver. 1: 12.5%, Potentiometer 12.5 %...25 %

Status LED:

Module active: LED on / open circuit: LED flashing

Module active: LED on / open circuit: LED flashing

Error: LED off

Error: LED off

### General Data

Supply voltage

18 Vdc ... 24 Vdc ... 30 Vdc

18 Vdc ... 24 Vdc ... 30 Vdc

Power consumption

830 mW ... 880 mW ... 980mW @ I<sub>out</sub> = 20 mA

830 mW ... 880 mW ... 980mW @ I<sub>out</sub> = 20 mA

Current carrying capacity of cross-connection

2 A

2 A

Operating temperature

0...55°C

0...55°C

Storage temperature

-20...85°C

-20...85°C

Factory setting

PT 100/3 0 ... 100 °C / 4 ... 20 mA

PT 100/3 0 ... 100 °C / 4 ... 20 mA

Dimensions L/H/W

No manual fine adjustment: slow step response

No manual fine adjustment: slow step response

Weight

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Approvals

approx. 100 g (0.22 lbs.)

approx. 100 g (0.22 lbs.)

Coordination of insulation according to DIN EN 50178, 04/98

CE, cULus, GL

CE, cULus, GL

Rated voltage

300 V

300 V

Rated surge voltage

4 kV

4 kV

Oversupply category

III

III

Contamination class

2

2

Clearance and creepage distance

3 mm

3 mm

Test voltage

2 kVeff

2 kVeff

Standards/specifications

EN 50178, IEC751

EN 50178, IEC751

EMC standards

EN 50081, EN50082, EN55011

EN 50081, EN50082, EN55011

\* T<sub>U</sub> = 23 °C single module

### Switch position/setting options (see next page)

## RTD-Signal Conditioner (configurable)

### WAVEANALOG PRO RTD

#### Switch position/setting options

Selection of input		
Input	Switch 1	■ = on □ = off
	1 2 3	
PT100 2-wire	■ ■ ■	
PT100 3-wire	□ □ □	
PT100 4-wire	■ ■ □	
R 2-wire	□ □ □	
NI100 2-wire	■ ■ □	
NI100 3-wire	□ □ □	
NI100 4-wire	■ □ □	
Potentiometer	□ □ □	

### WAVEANALOG PRO RTD 1000

#### Switch position/setting options

Selection of input		
Input	Switch 1	■ = on □ = off
	1 2 3	
PT1000 2-wire	■ ■ ■	
PT1000 3-wire	□ □ □	
PT1000 4-wire	■ ■ □	
R 2-wire	□ □ □	
NI1000 2-wire	■ ■ □	
NI1000 3-wire	□ □ □	
NI1000 4-wire	■ □ □	
Potentiometer	□ □ □	

Selection of output		
Output	Switch 2	S.1
	6 7	
0...10V	■ □	
0...20mA	□ □	
4...20mA	□ ■	

Selection of step set time		
Time of step response	S.2	
	8	
slow	■	
fast	□	

Selection of minimum input values		
q <sub>min</sub>	R <sub>min</sub>	Pot.min
	4 5 6 7	Switch 1
0°C	0	0%
-10°C	10	10%
-20°C	20	20%
-25°C	20	25%
-30°C	30	30%
-40°C	40	40%
-50°C	50	50%
-60°C	60	60%
-70°C	70	70%
-80°C	80	80%
-90°C	90	
-100°C	100	
-150°C	150	
-200°C	200	
Special range		□ □ □ ■

Selection of minimum input values		
q <sub>min</sub>	R <sub>min</sub>	Pot.min
	4 5 6 7	Switch 1
0°C	0	0%
-10°C	100	10%
-20°C	200	20%
-25°C	200	25%
-30°C	300	30%
-40°C	400	40%
-50°C	500	50%
-60°C	600	60%
-70°C	700	70%
-80°C	800	80%
-90°C	900	
-100°C	1000	
-150°C	1500	
-200°C	2000	
Special range		□ □ □ ■

Selection of the measurement range		
T	R	pot.
	1 2 3 4 5	Switch 2
40K	20	20%
50K	25	25%
60K	30	30%
70K	35	35%
80K	40	40%
90K	45	45%
100K	50	50%
110K	55	55%
120K	60	60%
125K	62,5	62,5%
130K	65	65%
140K	70	70%
150K	75	75%
160K	80	80%
170K	85	85%
180K	90	90%
190K	95	95%
200K	100	100%
250K	125	---
300K	150	---
350K	175	---
400K	200	---
450K	225	---
500K	250	---
550K	275	---
600K	300	---
650K	325	---
700K	350	---
750K	375	---
800K	400	---
850K	425	---
900K	450	---

Selection of the measurement range		
T	R	pot.
	1 2 3 4 5	Switch 2
40K	200	20%
50K	250	25%
60K	300	30%
70K	350	35%
80K	400	40%
90K	450	45%
100K	500	50%
110K	550	55%
120K	600	60%
125K	625	62,5%
130K	650	65%
140K	700	70%
150K	750	75%
160K	800	80%
170K	850	85%
180K	900	90%
190K	950	95%
200K	1000	100%
250K	1250	---
300K	1500	---
350K	1750	---
400K	2000	---
450K	2250	---
500K	2500	---
550K	2750	---
600K	3000	---
650K	3250	---
700K	3500	---
750K	3750	---
800K	4000	---
850K	4250	---
900K	4500	---

#### Example for Zero and Span

##### Temperature adjustment:


Output 4...20 mA

DIP-switch -10 °C...+110 °C

Span 75...110 °C

Span 120 °C

Adjustment of Span ± 12.5 %

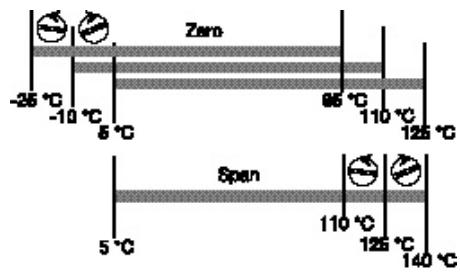

#### Adjustment help WAVEtool

This service tool enables quick and uncomplicated configuration of WAVEANALOG PRO.

Download from Internet:

[www.weidmuller.com](http://www.weidmuller.com)

Products

Downloads

(see page 29)

NEW

## RTD-Signal Conditioner for copper elements (configurable)


### WAVEANALOG PRO RTD Cu

- Universally adjustable by DIP-switches
- 3-way-isolation
- Status LED
- Linearization
- Cross-connectable voltage supply via cross-connectors

### Approvals:



### Schematic circuit diagram

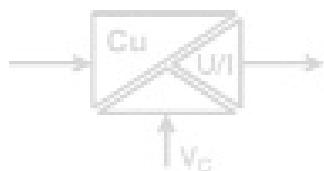

### PRO RTD Cu



Connection	Selection of connection	
	Switch 1	Type
3-wire	<input checked="" type="checkbox"/>	Cu 10
4-wire	<input type="checkbox"/>	Cu 25

Type	Selection of sensor	
	Switch 1	Switch 1
Cu 10	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cu 25	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Cu 50	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Cu 100	<input type="checkbox"/>	<input type="checkbox"/>

$q_{min}$	Selection of minimum input values			
	Switch 1	4	5	6
- 0 °C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
-10 °C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
-20 °C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
-25 °C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-30 °C	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
-40 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
-50 °C	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
-60 °C	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-70 °C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
-80 °C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
-90 °C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
-100 °C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-150 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
-200 °C	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Special range	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Span	Selection of the measurement range				
	Switch 2	1	2	3	4
40 K	<input checked="" type="checkbox"/>				
50 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
60 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
70 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
80 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
90 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
100 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
110 K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
120 K	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
125 K	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
130 K	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
140 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
150 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
160 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
170 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
180 K	<input type="checkbox"/>				
190 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
200 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
210 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
220 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
230 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
240 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
250 K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
260 K	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
270 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
280 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
290 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
300 K	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
350 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
400 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
450 K	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
460 K	<input type="checkbox"/>				

Output	Selection of output		Switch 1
	6	7	
0...10 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	
0...20 mA	<input type="checkbox"/>	<input type="checkbox"/>	
4...20 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Time of step response	Selection of step set time		Switch 1
	8	Switch 2	
slow	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
fast	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

■ = on  
□ = off


# Thermo-Signal Conditioners

## WAVEANALOG Thermo

- Thermocouples K, J, T, E, N, R, S, B configurable
- Temperature range -200 °C ... +1820 °C
- No adjustment necessary
- Cold junction compensation
- Configurable output signal
- Cross-connectable voltage supply via cross-connectors

Approvals: 

### Schematic circuit diagram



### Ordering data

Screw connection

Tension clamp connection

Input/Output

### Technical data\*

#### Input signal

Types

K -200 ... +1372 °C
J -200 ... +1200 °C
T -200 ... +400 °C
E -200 ... +1000 °C
N -200 ... +1300 °C
R -50 ... +1760 °C
S -50 ... +1760 °C
B +50 ... +1820 °C
0 ... 20 mA
500
4 ... 20 mA
500
0 ... 10 V

#### Output signal

Load resistance

#### Output signal

Load resistance

#### Output signal

Load resistance

Accuracy at Tu = 23 °C

Temperature coefficient

Response time without filter

Response time with Filter

#### General Data

Voltage supply

Power consumption

Current carrying capacity of cross-connection

Open circuit recognition

Operating temperature

Storage temperature

Standards/specifications

EMC standards

Dimensions L/H/W

Approvals

\* Tu = 23 °C single module

## Thermo Select

°C / 0 ... 20 mA,  
4 ... 20 mA, 0 ... 10 V



### Switch position/setting options

Type	SW 1			SW 2					
	1	2	3	Span	1	2	3	4	5
K	■	■	■	100 °C	■	■	■	■	■
J	□	■	■	150 °C	■	■	■	■	□
T	■	□	■	200 °C	■	■	■	■	□
E	□	□	■	250 °C	■	■	■	■	□
N	■	■	□	300 °C	■	■	□	■	■
R	□	■	□	350 °C	■	■	□	■	□
S	■	□	□	400 °C	■	■	□	□	□
B	□	□	□	450 °C	■	■	□	□	□
				500 °C	■	□	■	■	□
				550 °C	■	□	■	■	□

#### SW 1

Tmin	4	5	6	7
0 °C	■	■	■	■
-10 °C	■	■	■	□
-20 °C	■	■	□	■
-30 °C	■	■	□	□
-40 °C	■	□	■	■
-50 °C	■	□	■	□
-60 °C	■	□	□	■
-70 °C	■	□	□	□
-80 °C	■	□	□	□
-90 °C	□	■	■	■
-100 °C	■	□	□	■
-110 °C	■	□	□	□
-120 °C	■	□	□	□
-130 °C	■	□	□	□
-140 °C	■	□	□	□
-150 °C	■	□	□	□
-160 °C	■	□	□	□
-170 °C	■	□	□	□
-180 °C	■	□	□	□
-190 °C	■	□	□	□
-200 °C	■	□	□	□
+50 °C	□	■	■	□
+100 °C	□	■	□	■
+150 °C	□	■	□	□
+200 °C	□	□	■	■
+250 °C	□	□	■	□
+300 °C	□	□	□	■
+350 °C	□	□	□	■
+400 °C	□	□	□	■
+450 °C	□	□	□	■
+500 °C	□	□	□	■
+550 °C	□	□	■	■
+600 °C	□	□	■	■
+650 °C	□	□	■	■
+700 °C	□	□	■	■
+750 °C	□	□	■	■
+800 °C	□	□	■	■
+850 °C	□	□	■	■
+900 °C	□	□	■	■
+950 °C	□	□	■	■
+1000 °C	□	□	■	■
+1050 °C	□	□	■	■
+1100 °C	□	□	■	■
+1150 °C	□	□	■	■
+1200 °C	□	□	■	■
+1250 °C	□	□	■	■
+1300 °C	□	□	■	■
+1350 °C	□	□	■	■
+1400 °C	□	□	■	■
+1450 °C	□	□	■	■
+1500 °C	□	□	■	■
+1600 °C	□	□	■	■
+1700 °C	□	□	■	■
+1800 °C	□	□	■	■

#### SW 2

Output	6	7
0 - 10 V	■	□
0 - 20 mA	□	□
4 - 20 mA	□	■

#### Filter 8

off	□
on	■

■ = on

□ = off



**NEW**

## Thermo-Signal Conditioners

### MICROANALOG Thermo Output select

- 2-way isolation between input, output and supply voltage
- Cold junction compensation
- Linearity
- Output calibrated selectable by DIP-switches



### Thermo-K Output select Thermo-J Output select

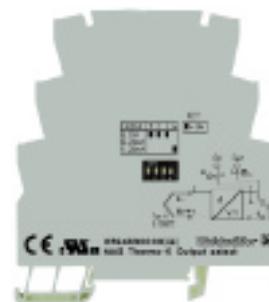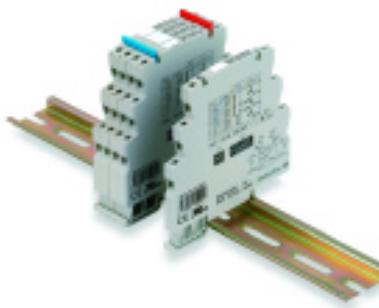

### Approvals:




### Schematic circuit diagram

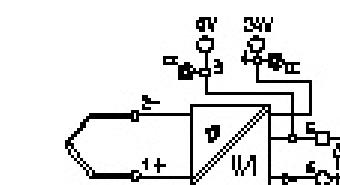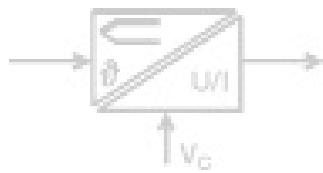

Output	Switch			
	1	2	3	4
0 ... 10 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
0 ... 20 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4 ... 20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

■ = on  
□ = off

### Connection

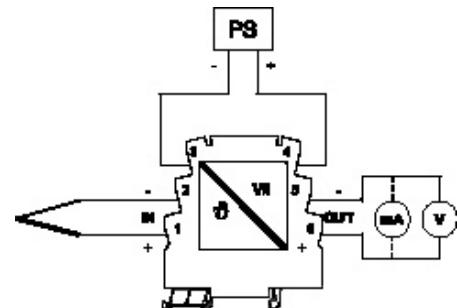

### Ordering data

Screw connection	Type	Part No.
MAS Thermo-K Output select	8594830000	
MAS Thermo-K Output select	8594860000	
MAS Thermo-J Output select	8615210000	
MAS Thermo-J Output select	8615240000	

### Technical data\*

#### Input (fix)

#### Output (calibrated selectable)

##### Load resistance

< 400 Ohm @ providing 24 Vdc

> 10 kOhm

< 20m V<sub>eff</sub>

Accuracy (incl. Linearity and cold junction compensation)

Thermoelement Typ K, 0...1000 °C

Thermoelement Typ J, 0...700 °C

Temperature coefficient

Response time

#### Thermocouple as in EN 60584-1

Type K, 0...1000 °C

Type J, 0...700 °C

#### 0...10V / 4...20mA / 0...5V / 0...20mA (factory setting)

< 0.6 % of selected range

< 0.7 % of selected range

< 250 ppm/K of selected range

< 0.7 sek

### General Data

#### Voltage supply

Current carrying capacity of the connection between connections 3 and 5:

#### Power consumption

Operating temperature

Storage temperature

Approvals

#### Dimensions L/H/W

### Coordination of insulation according to DIN EN50178, 04/98

#### Rated voltage

24 Vdc ( $\pm 10\%$ )

#### Test voltage

100 mA

#### Overvoltage category

approx. 0.6 W

#### Contamination class

0...+55 °C

-25 °C...+85 °C

CE, cULus

100 V

500 V

III

2

\* Tu 20 °C

# Thermo-Signal Conditioners - configurable


## WAVEANALOG PRO Thermo

- 3-way-isolation
- Thermocouples
- K, J, T, E, N, R, S, B configurable
- Temperature range  
-200 °C ... +1820 °C configurable
- No adjustment necessary
- Cold junction compensation
- Configurable output signal
- Cross-connectable voltage supply via cross-connectors

## Approvals:



## Schematic circuit diagram

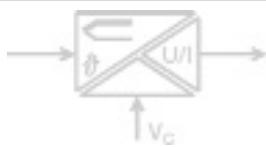

## Ordering data

Screw connection

Tension clamp connection

Input/Output

## Technical data\*

### Input (adjustable)

Accuracy at Tu = 23 °C


## PRO Thermo



## Adjustment help WAVETOOL

This service tool enables quick and uncomplicated configuration of WAVEANALOG PRO. Download from the Internet:  
[www.weidmuller.com](http://www.weidmuller.com)  
Products  
Downloads  
(see page 29)

Type	Selection of thermocoupler			Selection of minimum temperature						
	SW1	1	2	3	q <sub>min</sub>	SW1	4	5	6	7
K	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	0°C	<input checked="" type="checkbox"/>				
J	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-10°C	<input checked="" type="checkbox"/>				
T	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-20°C	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
E	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-30°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
N	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-40°C	<input checked="" type="checkbox"/>				
R	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-50°C	<input checked="" type="checkbox"/>				
S	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-100°C	<input checked="" type="checkbox"/>				
B	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-150°C	<input checked="" type="checkbox"/>				
					-200°C	<input checked="" type="checkbox"/>				
					+50°C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
					+100°C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					+150°C	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					+200°C	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
					+250°C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
					500°C	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
					Sonderbereich	<input type="checkbox"/>				

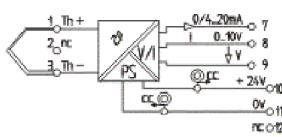

### Output (adjustable)

Output voltage

Offset voltage

Load resistance

Output current

Offset current

Load resistance

Step response

at connected filter function

max. wire resistance

Open circuit recognition

Range of man. fine adjustment

Status LED:

## General Data

Supply voltage:

Power consumption:

Current carrying capacity of cross-connection

Operating temperature

Storage temperature

Standards/specifications

EMC standards

Factory setting

Dimensions L/H/W

Weight

Approvals

\* Tu = 23 °C single module

Type	Selection of temperature span					Selection of output		SW2		
	SW2	1	2	3	4	5	Output	6	7	
Span	100°C	<input checked="" type="checkbox"/>	0...10V	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
	150°C	<input checked="" type="checkbox"/>	0...20mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>					
	200°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4...20mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
	250°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	300°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	350°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	400°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	450°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	500°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	550°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	600°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	650°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	700°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	750°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	800°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	850°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	900°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	950°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1000°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1050°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1100°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1150°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1200°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1250°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1300°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1350°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1400°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1450°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1500°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1600°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1700°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	1800°C	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				

■ = on  
□ = off

## Coordination of insulation according to DIN EN 50178, 04/98

Rated voltage	300 V
Rated surge voltage	4 kV
Oversupply category	III
Contamination class	2
Clearance and creepage distance	3 mm
Test voltage	2 kVeff

NEW


# Frequency Signal Conditioners

## WAVEANALOG PRO Frequency

- 3-way-isolation
- Max. input frequency 100 kHz
- Input and output selectable by DIP-switches
- No adjustment required
- Special range programmable

Approvals: 

### Schematic circuit diagram



### Ordering data

Screw connection

Tension clamp connection

### Technical data\*

#### Input (adjustable)

Input frequency (selectable by DIP-switches)

Input frequency (programmable)

Resolution

Accuracy of frequency measurement

#### Namur input according DIN 19234

Threshold

Hysteresis

#### NPN input

Threshold

Hysteresis

Minimum pulse duration

Minimum pulse separation

#### PNP output

Threshold

Hysteresis

Minimum pulse duration

Minimum pulse separation

Supply voltage for electrical sensor

#### Output

Current / voltage (selectable by DIP-switches)

Output voltage

Output offset voltage

Load resistance

Output current

Output offset current

Load resistance

Accuracy

Temperature coefficient

Response time

#### Coordination of insulation according to DIN EN 50178, 04/98

Rated voltage

Rated surge voltage

Overvoltage category

Contamination class

Clearance and creepage distance

Test voltage

#### General Data

Supply voltage

Power consumption

Current carrying capacity of cross-connection

Operating temperature

Storage temperature

Standards/specifications

EMC standards

Factory setting

Dimensions L/H/W

Weight

Approvals

\* Tu 23°C, single module

## PRO Fred



### Selecting the operating mode

Operating mode	Switch 2	
	3	4
0...fmax	<input type="checkbox"/>	<input type="checkbox"/>
fmin...fmax	<input type="checkbox"/>	<input checked="" type="checkbox"/>
saving	<input checked="" type="checkbox"/>	<input type="checkbox"/>
fmin	<input checked="" type="checkbox"/>	<input type="checkbox"/>

$$f = (A+B) \times C$$

### Selecting the frequency

A	Switch 1				B	Switch 1			
	1	2	3	4		5	6	7	8
0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0.1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	0.3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0.4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0.5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0.6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	0.7	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	0.8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0.9	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
10	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
11	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
12	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					
13	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					
14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					

### Selecting the frequency

C	Switch 2			
	1	2	3	4
x1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
x10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
x100	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
x1000	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

### Selecting the output


Output	Switch 2			
	5	6	7	8
0...10 V	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
0...20 mA	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4...20 mA	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0...5 V	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

### Special range (frequency generator is required)

Funktion	Switch 2			
	1	2	3	4
save min. frequency	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
save max. frequency	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
select special range	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

■ = on  
□ = off

### Application

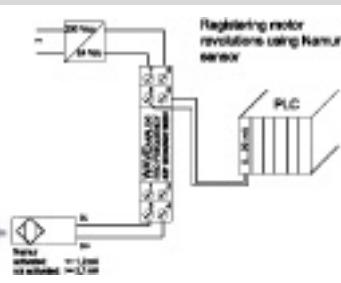


# Frequency Signal Conditioners


## WAVEANALOG PRO Frequency

### Wiring diagram


**3-wire Initiator with PNP output**

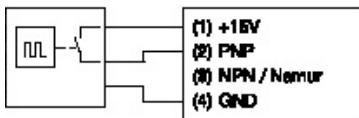


**3-wire Initiator with NPN output**

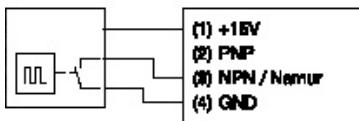


**2-wire Initiator**

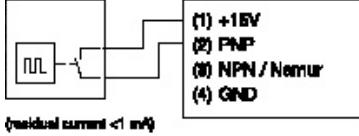


**Push-pull output stage**

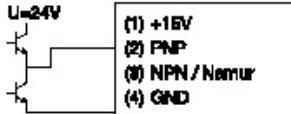


**3-wire Initiator with PNP output and external power supply**

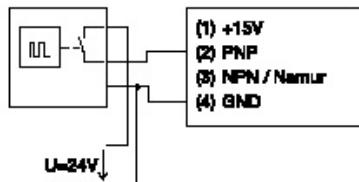

**3-wire Initiator with NPN output and external power supply**

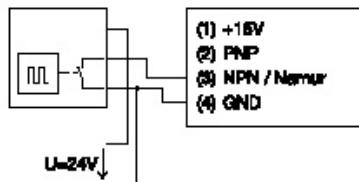

**Namur Initiator**

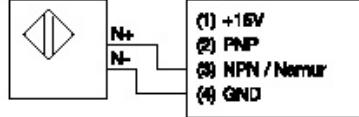

### Adjustment help

Set the input range via the DIP switches  
(no frequency generator required):

2 cases are to be distinguished:

**1. below measurement frequency = 0 Hz**

- Select operating mode „0...fmax“.  
S2.3 = 0 and S2.4 = 0
- Set upper measurement frequency via the DIP switches S1 and S2.1, S2.2 (see table)
- Ready!

**2. lower measurement frequency 0 Hz**

- First, the lower measurement frequency has to be saved.  
Select operating mode "save from fmin".  
S2.3 = 1 and S2.4 = 0
- Set upper measurement frequency via the DIP switches S1 and S2.1, S2.2 (see table).  
Connect the module to the power supply to save the frequency.
- Select operating mode "fmin...fmax".  
S2.3 = 0 and S2.4 = 1
- Set upper measurement frequency via the DIP switches S1 and S2.1, S2.2 (see table)
- Ready!

### Setting the input range using a frequency generator:

- Select the switch setting for saving the minimum frequency:  
S2.1=0 ; S2.2=1; S2.3=1 and S2.4=1
- Apply minimum frequency to the module
- Connect the module to the power supply.
- The LED lights up when the input frequency is measured. The frequency has been saved when the LED goes out;  
the module can be disconnected from the power supply.
- Repeat the process with the maximum frequency:  
S2.1=1; S2.2=0; S2.3=1 and S2.4=1
- Select special range:  
S2.1=1; S2.2=1; S2.3=1 and S2.4=1

# DC-Frequency Signal Conditioners

- Tension clamp connection
- LED-Display
- Adjustable frequency output

The option of reading-in the analog signals from the field via counter inputs of the control is made possible by converting the analog signals in to frequencies. It is recommended that twisted and shielded 2-wire cables are used.

## Approvals:



### Schematic circuit diagram/settings

MCZ VFZ 0...10 V and MCZ CFC 0...20 mA			
1	2	3	4 DIP switch
■	□	□	□ 0...16 kHz
□	■	□	□ 0...8 kHz
□	□	■	□ 0...4 kHz
□	□	□	■ 0...1 kHz

MCZ CFC 4...20 mA CLP			
1	2	3	4 DIP switch
■	□	□	□ 3.2...16 kHz
□	■	□	□ 1.6...8 kHz
□	□	■	□ 0.8...4 kHz
□	□	□	■ 0.2...1 kHz

■ = on  
□ = off

### Ordering data

for TS 35	Type	Part No.	Type	Part No.	Type	Part No.
	MCZ VFC	8461470000	MCZ CFC	8461480000	MCZ CFC	8461490000
	0...10 V		0...20 mA		4...20 mA LP*	
Overload limits, input	30 V		50 mA		50 mA	
Input resistance	100 k		50			
Voltage drop, Input			1 V at 20 mA		5.8...6.4 at 20 mA	
Output						
Output frequency, end value	1 kHz, 4 kHz, 8 kHz, 16 kHz		1 kHz, 4 kHz, 8 kHz, 16 kHz		1 kHz, 4 kHz, 8 kHz, 16 kHz	
Frequency adjustment	DIL switch		DIL switch		DIL switch	
Readjustment range	±10 %, internal		±10 %, internal		±10 %, internal	
Output level	PNP, Ub- 0.7 V		PNP, Ub- 0.7 V		PNP, Ub- 0.7 V	
Output current	max. 20 mA		max. 20 mA		max. 20 mA	
Display	LED, pulsing		LED, pulsing		LED, pulsing	
Supply voltage	24 Vdc ±10 %		24 Vdc ±10 %		24 Vdc ±20 %	
Power consumption	14 mA, without load		14 mA without load		14 mA without load	
Making current limit	200 mA		200 mA			
Polarisation protection	yes		yes		yes	
Accuracy	0.2 % v. FSR		0.2 % v. FSR		0.15 % v. FSR	
Temperature coefficient	< 250 ppm/°C		< 250 ppm/°C		< 250 ppm/°C	
<b>Coordination of insulation according to EN 50178</b>						
Voltage strength input/output	1 kVdc		1 kVdc		150 V	
Rated voltage	100 V		100 V		2.5 kV	
Rated surge voltage	1.5 kV		1.5 kV		III	
Overvoltage category	III		III		4 kV <sub>eff</sub> / 1 min	
Voltage strength I/O to mounting rail	4 kV <sub>eff</sub> / 1 min		4 kV <sub>eff</sub> / 1 min		0 °C...+50 °C	
Operating temperature	0 °C...+50 °C		0 °C...+50 °C		-25 °C...+85 °C	
Storage temperature	-25 °C...+85 °C		-25 °C...+85 °C		6 mm (0.24 in.)	
Overall width	6 mm (0.24 in.)		6 mm (0.24 in.)		1.5 mm <sup>2</sup>	
Conductor cross-section	1.5 mm <sup>2</sup>		1.5 mm <sup>2</sup>			

### MCZ VFC




0...10 V

### MCZ CFC

0...20 mA

### MCZ CFC

4...20 mA CLP

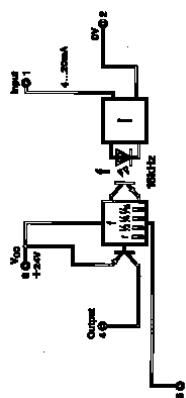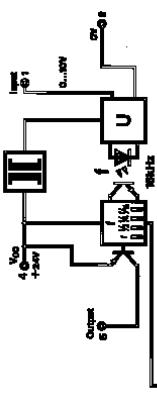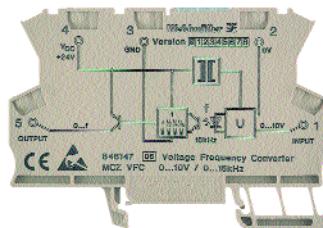

# Bridge Signal Conditioners


## WAVEANALOG PRO Bridge

- 3-way-isolation
- Input and output selectable by DIP-Switches
- No adjustment required
- Inverted output signals possible

## Approvals:



## Schematic circuit diagram

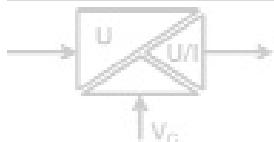

## Ordering data

Screw connection  
Tension clamp connection

## Technical data\*

### Input

Input voltage (selectable by DIP-Switches)

### Input resistance

### Output

Output voltage (selectable by DIP-Switches)

Load resistance (Voltage output)

Output current (selectable by DIP-Switches)

Load resistance (Current output)

Wire break detection

Status indication

Accuracy

Temperature coefficient

Response time

Bridge supply voltage

## Coordination of insulation according to EN 50178, 04/98

Rated voltage

Rated surge voltage

Oversupply category

Contamination class

Clearance and creepage distance

Test voltage

## General Data

Supply voltage

Power consumption

Current carrying capacity of cross-connection

Operating temperature 0...55 °C

Storage temperature -20...85 °C

Standards/specifications EN 50178

EMC standards EN 61000-6-2, EN 50081-2

Factory setting -500 mV...+500 mV / 0...10 V / +10 V / standard

Dimensions L/H/W 92.4 / 112.5 / 17.5 mm (3.64 / 4.43 / 0.69 in.)

Weight 100 g (0.22 lbs.)

Approvals CE, cULus


\* Tu 23 °C, single module

## Example for bridge supply voltage

### Temperature adjustment:

Input voltage	0...10 mA
Output	0...10 V
Bridge supply voltage	+4.8...10.2 V
Bridge excitation	1 mV/V (Declaration from manufacturer)

## PRO Bridge

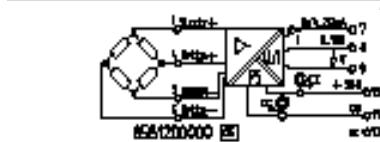

	SW 1
Input voltage	
0...10 mV	<input type="checkbox"/>
0...20 mV	<input type="checkbox"/>
0...50 mV	<input type="checkbox"/>
0...100 mV	<input type="checkbox"/>
0...200 mV	<input type="checkbox"/>
0...500 mV	<input type="checkbox"/>
-10 mV...10 mV	<input checked="" type="checkbox"/>
-20 mV...20 mV	<input checked="" type="checkbox"/>
-50 mV...50 mV	<input checked="" type="checkbox"/>
-100 mV...100 mV	<input checked="" type="checkbox"/>
-200 mV...200 mV	<input checked="" type="checkbox"/>
-500 mV...500 mV	<input checked="" type="checkbox"/>
output	
0...+10 V	<input type="checkbox"/>
0...+5 V	<input type="checkbox"/>
0...20 mA	<input type="checkbox"/>
4...20 mA	<input type="checkbox"/>
Bridge supply voltage	
+10V	<input checked="" type="checkbox"/>
+5V	<input checked="" type="checkbox"/>
+4.8...+10.2V adjustable	<input type="checkbox"/>
+4.8...+10.2V adjustable	<input type="checkbox"/>
man. adjustment and offset possible	<input type="checkbox"/>
Transmission method	
standard output signal	<input type="checkbox"/>
inverse output signal	<input checked="" type="checkbox"/>

= on

= off

## Status LED

LED on normal operating

LED off Error



LED blinks slow measurement range undershoot

Uin < Umax + 10%

LED blinks fast measurement range undershoot

Uin < Umax - 10 %

## Application

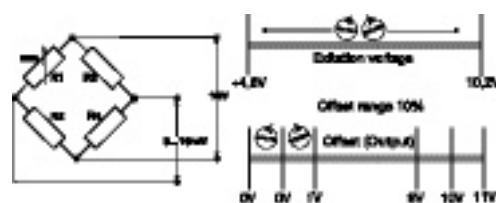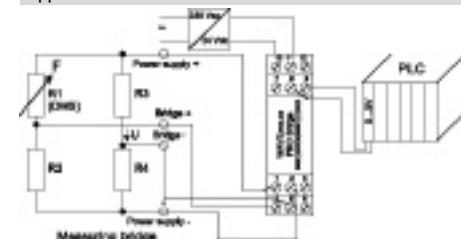

# Interface Converter RS232 / RS485/422 and RS232 / TTY

## WAVE DATA

- 3-way-isolation
- RS232/RS485/422 = max. transmission rate 115.2 kBit/s
- RS232/Tty = max. transmission rate 19.2 kBit/s
- RS232 connection by SUB-D 9
- RS485/422 shield connection by KLBÜ
- TTY shield connection by KLBÜ
- DTE or DCE connection selectable

## Approvals:




## WDS2 RS232/RS485/422



## WDS2 RS232/TTY



## Schematic circuit diagram

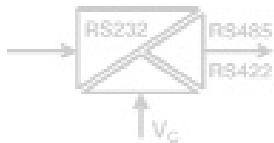

## Ordering data

Screw connection

Type

Part No.

WDS2 RS232/RS485/422

8615700000

Type

Part No.

WDS2 RS232/TTY

8615690000

## Technical data\*

### RS232 interface

Connection

SUB-D 9 (connector)

SUB-D 9 (connector)

DTE/DCE connection

selectable by DIP-switches

selectable by DIP-switches

### RS422/RS485 interface

### RS422 interface

Connection

selectable by DIP-switches

selectable by DIP-switches

Shield point

BLZ Screw connection clamp

BLZ Screw connection clamp

Terminal resistance

KLBÜ 4-6 Z/1

KLBÜ 4-6 Z/1

Transmission length

by DIP-switches

max. 1000 m

max. 1200 m

### RS485 interface

Connection

BLZ Screw connection clamp

BLZ Screw connection clamp

Shield point

KLBÜ 4-6 Z/1

KLBÜ 4-6 Z/1

Terminal resistance

by DIP-switches

max. 1000 m

Transmission length

max. 1200 m

Maximum transmission rate

115.2 kBit/s

19.2 kBit/s

Bit distortion

< 1.5 %

< 1.5 %

Bit delay

3 µs

3 µs

## Coordination of insulation according to DIN EN50178, 04/98

Rated voltage

300

300

Rated surge voltage

4 kV

4 kV

Oversupply category

III

III

Contamination class

2

2

Clearance and creepage distance

3 mm

3 mm

Test voltage

1.2 KV<sub>eff</sub>

1.2 KV<sub>eff</sub>

## General Data

Supply voltage

18 Vdc ... 24 Vdc ... 30 Vdc

18 Vdc ... 24 Vdc ... 30 Vdc

Power consumption

max. 1.6 W @ Iout = 20 mA

max. 1.6 W @ Iout = 20 mA

Current carrying capacity of cross-connection

2 A

2 A

Operating temperature

0...55 °C

0...55 °C

Storage temperature

-20...85 °C

-20...85 °C

Standards/Specifications

EN 50178

EN 50178

EMC standards

EN 50081, EN 50082, EN 55011, EN 610000, EN 61326

EN 50081, EN 50082, EN 55011, EN 610000, EN 61326

Dimensions L/H/W

92.4 / 112.5 / 22.5 mm (3.64 / 4.43 / 0.88 in.)

92.4 / 112.5 / 22.5 mm (3.64 / 4.43 / 0.88 in.)

Weight

150 g (0.33 lbs.)

150 g (0.33 lbs.)

Approvals

CE, cULus

CE, cULus

\* Tu 23 °C, single module

## Current monitoring

Monitoring flows of currents enables a constant control of individual devices and installation components.

Discrepancies or disruptions arising in the electrical circuit can easily be evaluated as breakdowns. Targeted rectifying procedures can be taken.

The **WAVECONTROL** range of products convert sinusoidal/non-sinusoidal AC/DC currents up to 60 A to standard analog signals. The measurement processes are based on 2 basic principles.

One principle is alternating currents up to 10 A ac and 50/60 Hz are measured using the **transformer process**. The module is looped directly into the measurement circuit. A **Hall-effect** element comes in to operation at 10 A ac/dc.

The potential-free wire is inserted through the module, allowing currents up to 60 A ac/dc to be measured. Quite often, there are high-frequency parts of signals on the wire to be measured. In order to be able to take these parts of the signals into consideration, so-called **TRMS converters** (TRUE Root Mean Square) are connected to the Hall sensors. This enables measurements up to 2 kHz, independent of the shape of the curve.

Standard signals (0...20, 4...20 mA, 4...20 A current loop supply, 0...10 V or a switch output are on offer.

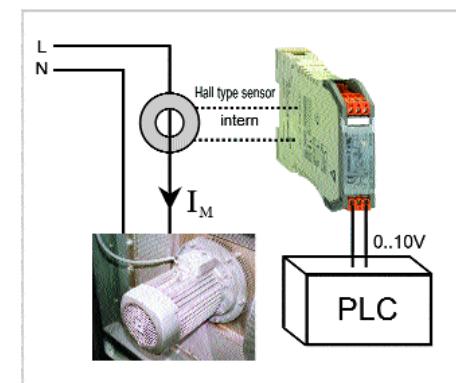


Fig.: Monitoring motor currents



Monitoring a motor in a cooling system



Monitoring a pump in a sewage treatment plant

## Current Monitoring

### WAVECONTROL

- Current ranges adjustable by DIP switch
- Cross-connectable voltage supply via cross-connectors
- Selectable hysteresis
- Selectable working and closed-circuit current principle


### WAS2 CMR WAZ2 CMR

1/5/10 A ac  
selectable with relay output



### WAS2 CMR WAZ2 CMR



20/40/60A ac  
selectable with relay output

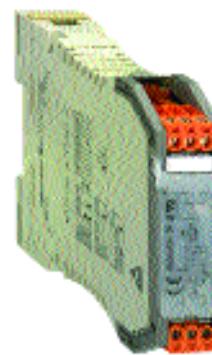

### Approvals:



### Schematic circuit diagram

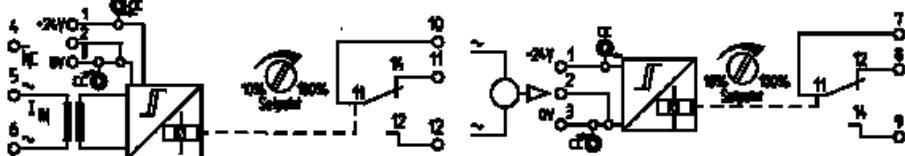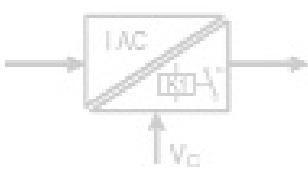

### Ordering data

Screw connection

Tension clamp connection

### Technical data\*

#### Input

Input current

Type

Part No.

WAS2 CMR 1/5/10A ac

8516560000

WAZ2 CMR 1/5/10A ac

8516570000

#### Technical data\*

#### Output

Contact set

1A ac/5A ac/10A ac selectable (without additional adjustment)

50Hz/60Hz

50Hz/60Hz

Pass through diameter

Measuring principle

Connection type

Measurement circuit voltage

Maximum measuring circuit

#### Output

1 changeover contact

Minimum switching voltage

6 Vdc/6 Vac

Maximum switching voltage

60 Vdc/250 Vac

Continuous current AC

3 A

Continuous current DC

0.7 A

Maximum switching current

7 A

Minimum switching current

100 mA

Status LED

green LED

Threshold

10 % ... 100 % adjustable via front potentiometer

Hysteresis

approx. 5 % or approx. 10 % selectable from set threshold

Temperature coefficient

800 ppm/K

Response time (10 ... 90%)

typ. 700 ms

Working/closed-circuit current principle

**Coordination of insulation according to DIN EN 50178, 04/98**

Rated voltage

300 V

Rated surge voltage

4 kV

Overvoltage category

III

Contamination class

2

Clearance and creepage distance

3 mm

Test voltage

4 kV eff

### General Data

#### Supply

Supply voltage

21.6 Vdc...24 Vdc...26.4 Vdc

Power consumption at rated voltage

8.3 mA (relay not switched)

24 mA (relay switched)

Reverse polarity protection

yes

Current carrying capacity of the cross-connection

2 A

Operating temperature

0 ... 50°C

Storage/transport

-20 ... +70°C

Factory setting

Input range: 5A ac; hysteresis 10%, working current principle

Dimensions L/H/W

92.4 /112.4 / 22.5 mm (3.64 / 4.43 / 0.88 in.)

Weight

150g (0.33 lbs.)

Approvals

CE, cULus

\*  $T_u = 23^\circ\text{C}$  single module


## Current Monitoring

### WAVECONTROL

- Input and output range adjustable by DIP switch
- No calibration required
- Cross-connectable voltage supply via cross-connectors

### WAS1 CMA WAZ1 CMA

1/5/10A ac  
selectable with  
analog output  
0...20 mA /  
4...20 mA  
0...10 V

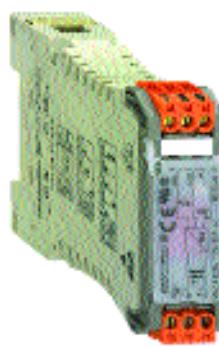

### WAS1 LP CMA WAZ1 LP CMA



1/5/10 A ac  
selectable with  
analog output  
4...20 mA  
loop powered



### Approvals:



### Schematic circuit diagram

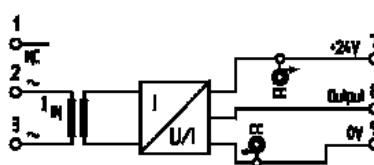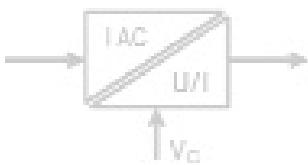

### Ordering data

Screw connection

Tension clamp connection

### Technical data\*

#### Input

	Type	Part No.
Input current	1 A ac/5 A ac/10 A ac selectable (without additional adjustment)	8523400000
Input frequency	50 Hz/60 Hz	8523410000

### Type

WAS1 LP CMA 1/5/10A ac

Part No. 8528650000

WAZ1 LP CMA 1/5/10A ac

Part No. 8528660000

#### Output

Current/voltage selectable	0 ... 10 V	1 A ac/5 A ac/10 A ac selectable (without additional adjustment)
	0 ... 20 mA	50 Hz/60 Hz
	4 ... 20 mA	0.5 % FSR
	0 ... 10 V	transformer coupled
	max. 0.05 V	transformer coupled
Output voltage	1 K	Screw or tension clamp connection
Offset voltage	approx. 13 V and. 24 mA	250 Vac
Load resistance	0/4 ... 20 mA	100 A for 1s
Output signal limit	max. 100 µA	
Output current	600	
Offset current		
Load resistance		

4 ... 20mA current loop supply

#### Status LED

Temperature coefficient	green LED
Response time (10 ... 90%)	ON-> OK; blinks -> signal out of range; OFF -> Error

200 ppm/K

typ. 700 ms

#### Coordination of insulation according to DIN EN 50178, 04/98

#### (safe separation)

Rated voltage	300V	300V
Rated surge voltage	6kV	6kV
Overvoltage category	III	III
Contamination class	2	2
Clearance and creepage distance	5.5 mm	5.5 mm
Test voltage	4kV eff	4kV eff

Dependent on voltage Vcc

green LED

ON-> OK; blinks -> signal out of range; OFF -> Error

200 ppm/K

typ. 700 ms

#### General Data

Supply	21.6 Vdc...24 Vdc...26.4 Vdc	13 Vdc ... 30 Vdc
Power consumption at rated voltage	40 mA at $I_{out} = 20 \text{ mA}$	
Reverse polarity protection	yes	yes

yes

Operating temperature	0 ... 50 °C	0 ... 50 °C
Storage/transport	-20 ... +70 °C	-20 ... +70 °C
Factory setting	0 ... 5 Aac; 4 ... 20 mA	0 ... 5 Aac; 4 ... 20 mA
Dimensions L/H/W	72 / 92.4 / 22.5 mm (2.83 / 3.64 / 0.88 in.)	72 / 92.4 / 22.5 mm (2.83 / 3.64 / 0.88 in.)
Weight	150 g (0.33 lbs.)	150 g (0.33 lbs.)
Approvals	CE, cULus	CE, cULus

\*  $T_u = 23^\circ\text{C}$  single module


## Current Monitoring

### WAVECONTROL

- Input and output range adjustable by DIP switch
- No calibration required
- True TRMS value measurements
- Hall sensor measurement method


### WAS2 CMA WAZ2 CMA

5/10A ac/dc selectable with analog output  
0 ... 20 mA/  
4 ... 20 mA/  
0 ... 10 V

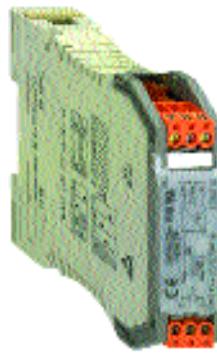

### WAS2 CMA WAZ2 CMA




20/25/30A ac/dc selectable with analog output  
0 ... 20 mA/  
4 ... 20 mA/  
0 ... 10 V

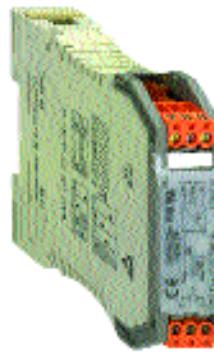

### Approvals:



### Schematic circuit diagram

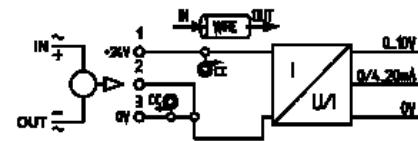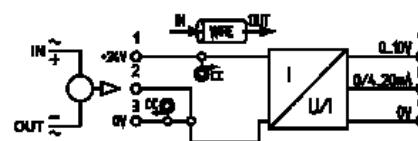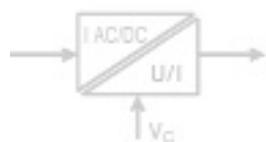

### Ordering data

Screw connection  
Tension clamp connection

### Technical data\*

#### Input

Input current  
Input frequency  
Accuracy

Measuring principle  
Connection type

Pass through diameter  
Measurement circuit voltage

Maximum measuring circuit

#### Output

Current/voltage selectable

Output voltage

Offset voltage

Load resistance

Output signal limit

Output current

Offset current

Load resistance

Status LED

Temperature coefficient

Response time (10 ... 90%)

### Coordination of insulation according to DIN EN 50178, 04/98

(Safe separation)

Rated voltage

Rated surge voltage

Oversupply category

Contamination class

Clearance and creepage distance

Test voltage

### General Data

Supply

Supply voltage

Power consumption at rated voltage

Reverse polarity protection

Operating temperature range

Storage/transport

Factory setting

Dimensions L/H/W

Weight

Approvals

\*  $T_u = 23^\circ\text{C}$  single module

### Type

WAS2 CMA 5/10A uc

### Part No.

8526610000

WAZ2 CMA 5/10A uc

8526620000

### Type

WAS2 CMA 20/25/30A uc

### Part No.

8545830000

WAZ2 CMA 20/25/30A uc

8545840000

### Type

20/25/30 A uc selectable (without additional adjustment)

0 Hz - 2 kHz (True RMS to DC Converter)

1% (0 Hz - 1 kHz) Crest factor 3 FSR

2% (0 Hz - 2 kHz) Crest factor 5 FSR

Contact-free current monitoring using Hall sensor

Push-through connection

(Please notice push through direction by DC measurement)

8 mm

400 Vac, higher voltages dependent

on wire insulation

dependent on wire cross-section

### 0 ... 10 V

0 ... 20 mA

4 ... 20 mA

0 ... 10 V

max. 0.08 V

1 K

approx. 13 V and. 24 mA

0/4 ... 20 mA

max. 150  $\mu$ A

600

green LED

ON-> OK; blinks -> signal out of range; OFF -> Error

650 ppm/K

typ. 700 ms

### 300 V

6 KV

III

2

5.5 mm

4 kV eff

### 21.6 Vdc...24 Vdc...26.4 Vdc

50 mA at  $I_{out} = 20 \text{ mA}$

yes

### 0 ... 50 °C

-20 ... +70 °C

0 ... 25 A uc; 4 ... 20mA

92.4 / 112.4 / 22.5 mm (3.63 / 4.42 / 0.88 in.)

150g (0.33 in.)

CE, cULus

## Current Monitoring

### WAVECONTROL

- Input and output range adjustable by DIP switch
- No calibration required
- Cross-connectable voltage supply via cross-connectors
- True TRMS value measurements
- Hall sensor measurement method

### Approvals:





### WAS2 CMA WAZ2 CMA

40/50/60A ac/dc selectable with analog output  
0 ... 20 mA/  
4 ... 20 mA/  
0 ... 10 V



### Schematic circuit diagram

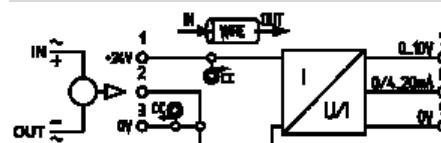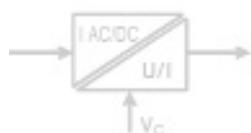

### Ordering data

	Type	Part No.
Screw connection	WAS2 CMA 40/50/60A uc	8513330000
Tension clamp connection	WAZ2 CMA 40/50/60A uc	8526590000

### Technical data\*

#### Input

Input current	40/50/60A uc selectable (without additional adjustment)
Input frequency	0 Hz - 2 kHz (True RMS to DC Converter)
Accuracy	1% (0Hz - 1KHz) Crest factor 3 FSR
	2% (0Hz - 2KHz) Crest factor 5 FSR
Measuring principle	Contact-free current monitoring using Hall sensor
Connection type	Push-through connection (Please notice push through direction by DC measurement)
Pass through diameter	8 mm
Measurement circuit voltage	400 Vac, higher voltages dependent on wire insulation
Maximum measuring circuit	dependent on wire cross-section

#### Output

Current/voltage selectable	0 ... 10 V
	0 ... 20 mA
	4 ... 20 mA
	0 ... 10V
Output voltage	max. 0.08 V
Offset voltage	- 1 k
Load resistance	approx. 13 V and. 24 mA
Output signal limit	0/4 ... 20 mA
Output current	max.150 $\mu$ A
Offset current	600
Load resistance	green LED
Status LED	ON-> OK; blinks -> signal out of range; OFF -> Error
Temperature coefficient	650 ppm/K
Response time (10 ... 90%)	type 700 ms

#### Coordination of insulation according to DIN EN 50178, 04/98

(Safe separation)	
Rated voltage	300 V
Rated surge voltage	6 KV
Oversurge category	III
Contamination class	2
Clearance and creepage distance	5.5 mm
Test voltage	4 kV eff

#### General Data

Supply	21.6 Vdc...24 Vdc...26.4 Vdc
Supply voltage	50 mA at $I_{out}$ = 20 mA
Power consumption at rated voltage	yes
Reverse polarity protection	
Operating temperature range	0 ... 50°C
Storage/transport	-20 ... +70°C
Factory setting	0 ... 50 A uc; 4 ... 20 mA
Dimensions L/H/W	92.4 / 112.4 / 22.5 mm (3.63 / 4.42 / 0.88 in.)
Weight	150 g (0.33 in.)
Approvals	CE, cULus

\*  $T_u$  = 23 °C single module

## Voltage monitoring with analog output

### WAVECONTROL

- 3-way-isolation
- Max. measuring voltage 450 Vac<sub>eff</sub>
- Output range selection by DIP-Switches
- No adjustment required


### VMA Vac



### Approvals:



### Schematic circuit diagram



### Ordering data

Screw connection

Tension clamp connection

Type	Part No.
WAS2 VMA Vac	8581220000
WAZ2 VMA Vac	8581230000

### Technical data\*

#### Input

Input voltage / input impedance

Connection 1: 0 V GND

Connection 2: 0...30 Vac / 30 k

Connection 3: 0...70 Vac / 70 k

Connection 4: 0...130 Vac / 130 k

Connection 5: 0...250 Vac / 250 k

Connection 6: 0...450 Vac / 450 k

Input frequency

40 Hz...400 Hz wave

Accuracy

1.3 % (40 Hz...60 Hz) typ. 1 %

Maximum overvoltage (short term)

2.0 % (70 Hz...400 Hz) typ. 1.5 %

#### Output

Current-/voltage output (by DIP-Switches)

0...10 V

0...20 mA

4...20 mA

Output voltage

0...10 V

Output offset voltage

max. 0.02 V

Load resistance

1 k

Output current

0/4...20 mA

Output offset current

max. 40 µA

Load resistance

600

Status induction

LED green

Temperature coefficient

250 ppm/K

Response time (0...90%)

300 ms

#### Coordination of insulation according to DIN EN 50178, 04/98

Supply / Output	Input / Output
300 V	600 V
4 kV	6 kV
III	III
2	2
3 mm	5.5 mm
3 kV <sub>eff</sub>	4 kV <sub>eff</sub>

Rated voltage

300 V

Rated surge voltage

4 kV

Overvoltage category

III

Contamination class

2

Clearance and creepage distance

3 mm

Test voltage

3 kV<sub>eff</sub>

#### General Data

Supply voltage

18 Vdc ... 24 Vdc ... 30 Vdc

Rated current consumption

40 mA...30 mA...24 mA (Iout = 20 mA)

Polarization protection

yes

Cross connection above

+24 V, max. current: 2 A

Cross connection below

0 V max. current: 2 A

Operating temperature

0...50 °C

Storage temperature

-20...+70 °C

Factory setting

0...10 V / 0...20 mA

Dimensions L/H/W

92.4 / 112.4 / 22.5 mm (3.64 / 4.42 / 0.88 in.)

Weight


200 g

Approvals

CE, cULus

\* Tu 23°C, single module

### Application

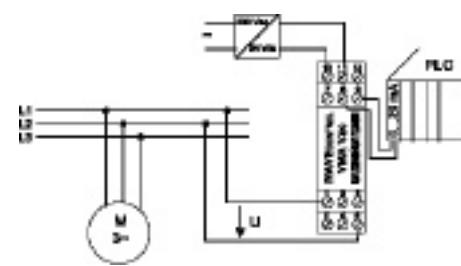

## Power supplies

### WAVEPOWER

The WAVEPOWER power supply is specially designed for use with WAVESERIES Analog signal conditioners. The modules could be supplied by using the pluggable cross connection, which reduces the installation time. Especially in decentralized Automation systems the required place will be reduced.


### CP-SNT 12W



#### Approvals:



#### Diagramm/Schematic circuit diagram

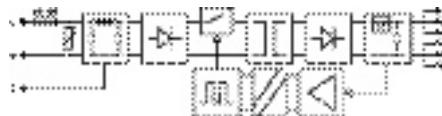

- secondary through plug-in jumpers ZQV  
cross-connectable to other WAVE-modules


#### Ordering data

Type	Part No.
CP-SNT 12 W	9918840024
Output voltage/max. current	
Input voltage	Minimum
	Typical
	Maximum
Input current	at 115 Vac
(Average values for references only)	at 230 Vac
	at 125 Vdc
	at 250 Vdc
Input protection	Fuse
	Overvoltage protection
Switching frequency	100 kHz PWM
Efficiency at maximum load	80%
Maximum ripple	0.1% RMS
Regulation	Load (10-100% load)
	at input voltage
Overload protection	Overcurrent shutdown with automatic restart plus thermal shutdown
Maximum capacity at output	8,000 µF
Hold time	at 115 Vac
(Maximum output current following input loss)	at 230 Vac
Storage temperature	-40 °C...+85 °C
Operating temperature	-20 °C...+50 °C max. full rated load Derating: 33% at 60 °C
Humidity	Operating temperature
	Storage temperature
Galvanic isolation	Input-output
	Input/output to mounting rail
	Input to earth
	Output to earth
Wire size	26-12 AWG (0.1-4.0 mm <sup>2</sup> )
Dimensions L/H/W	90 /18 / 112.5 mm (3.54 / 0.71 / 4.43 in.)
Weight	110 g (0.24 in.)
Mounts on mounting rail	TS 35
Approvals/certifications	CE, cULus, CSA


## Dimensions and accessories

### MICROANALOG

#### Screw connection

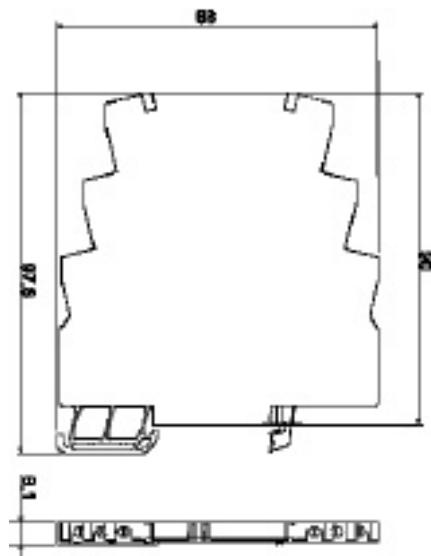


#### Tension clamp connection

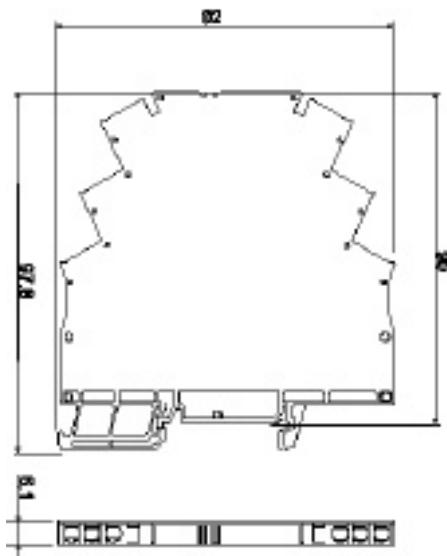


#### Accessories

Cross-connection, 2-pole, red
Cross-connection, 3-pole, red
Cross-connection, 4-pole, red
Cross-connection, 10-pole, red
Cross-connection, 41-pole, red
Cross-connection, 2-pole, blue
Cross-connection, 3-pole, blue
Cross-connection, 4-pole, blue
Cross-connection, 10-pole, blue
Cross-connection, 41-pole, blue
Terminal marker

Type	Part No.
ZOV 4N/2 red	1793950000
ZOV 4N/3 red	1793980000
ZOV 4N/4 red	1794010000
ZOV 4N/10 red	1794040000
ZOV 4N/41 red	1794070000
ZOV 4N/2 blue	1793960000
ZOV 4N/3 blue	1793990000
ZOV 4N/4 blue	1794020000
ZOV 4N/10 blue	1794050000
ZOV 4N/41 blue	1794080000
WS10/6	1060960000

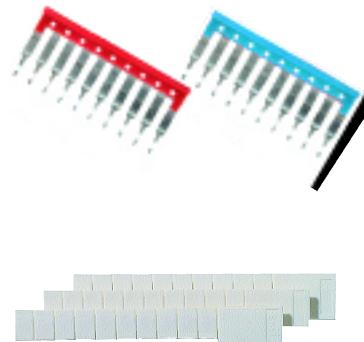


### MCZ

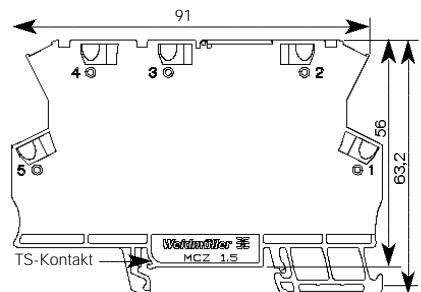

#### Accessories


Cross-connection , 2-pole, yellow
Cross-connection , 3-pole, yellow
Cross-connection , 4-pole, yellow
Cross-connection , 5-pole, yellow
Cross-connection , 6-pole, yellow
Cross-connection , 7-pole, yellow
Cross-connection , 8-pole, yellow
Cross-connection , 9-pole, yellow
Cross-connection , 10-pole, yellow
Terminal marker

Type	Part No.
ZOV 4N/2 yellow	1608950000
ZOV 4N/3 yellow	1608960000
ZOV 4N/4 yellow	1608970000
ZOV 4N/5 yellow	1608980000
ZOV 4N/6 yellow	1608990000
ZOV 4N/7 yellow	1609000000
ZOV 4N/8 yellow	1609010000
ZOV 4N/9 yellow	1609020000
ZOV 4N/10 yellow	1609030000
WS10/6	1060960000

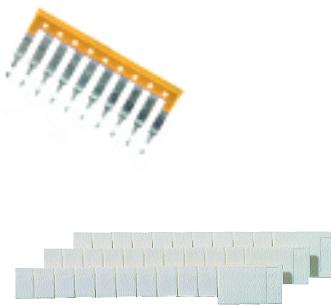


## Dimensions and accessories


WAVEBOX S 22.5

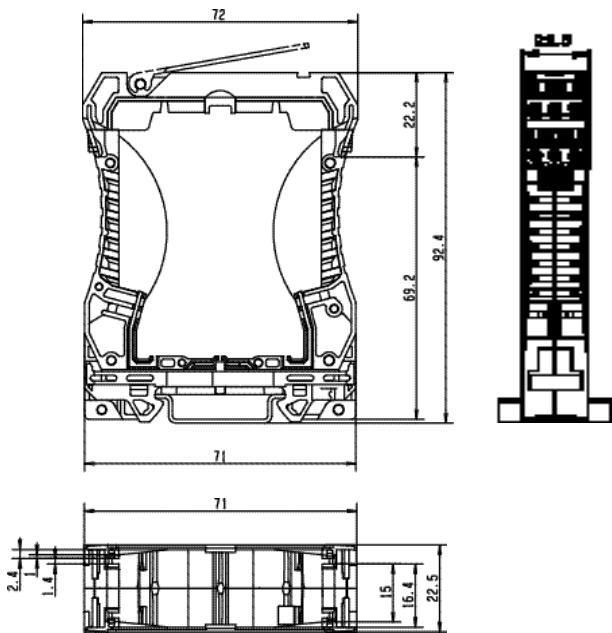


WAVEBOX L 22.5

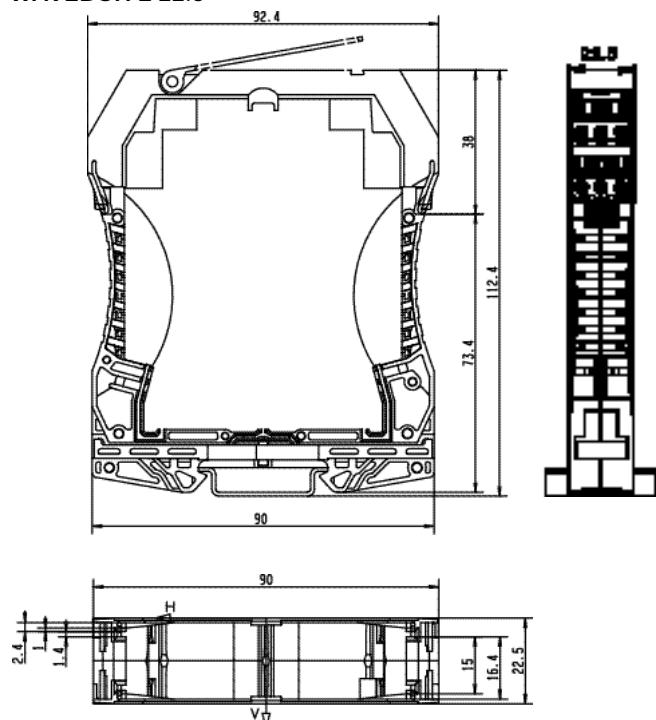

WAVEBOX 12.5

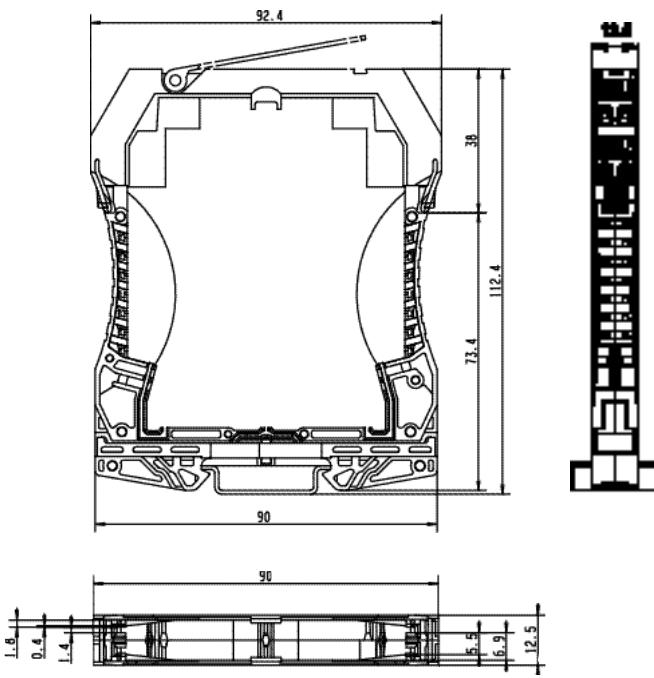

WAVEBOX 17.5

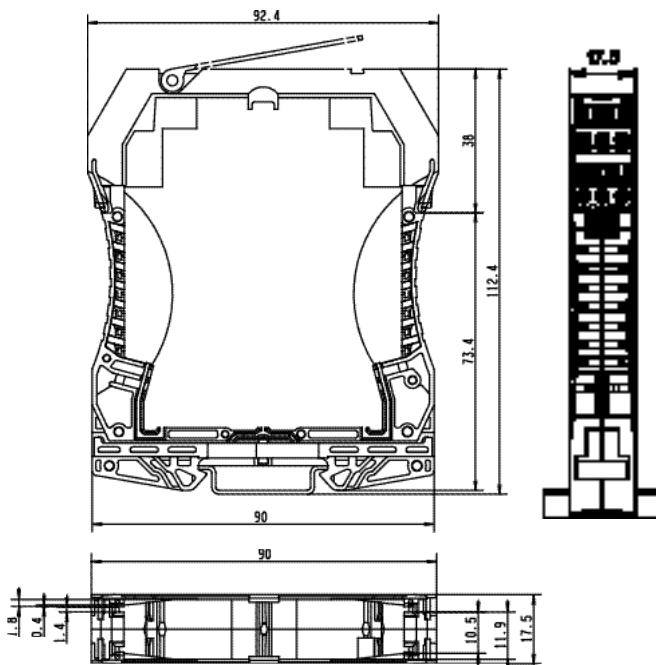


Dimensions in mm

### Accessories

Cross-connection ZOV 2.5N/2 black	Type	ZOV 2.5N/2 black	Part No.	1718080000
Cross-connection ZOV 2.5N/2 red		ZOV 2.5N/2 red		1717900000
Cross-connection ZOV 2.5N/2 blue		ZOV 2.5N/2 blue		1717990000
Cross-connection ZOV 2.5N/2 yellow		ZOV 2.5N/2 yellow		1693800000

### Terminal marker

WS 10/5 Multicard for Plotter print	WS10/5	1061160000
WS 10/5 Blank	WS10/5 neutral	1060860000

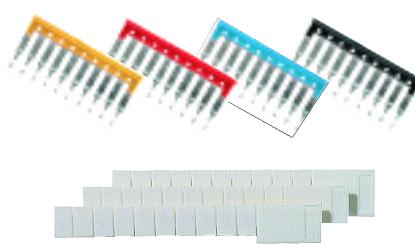

Argentina	Malaysia
Australia	Mexico
Austria	Morocco
Bahrain	Netherlands
Belarus	New Zealand
Belgium	Nicaragua
Brazil	Norway
Bulgaria	Oman
Canada	Pakistan
Chile	Panama
China	Peru
Colombia	Philippines
Costa Rica	Poland
Croatia	Portugal
Czech Republic	Qatar
Denmark	Romania
Egypt	Russia
El Salvador	Saudi Arabia
Estonia	Singapore
Finland	Slovakia
France	Slovenia
Germany	South Africa
Greece	South Korea
Guatemala	Spain
Honduras	Sweden
Hong Kong	Switzerland
Hungary	Syria
India	Taiwan
Indonesia	Thailand
Iran	Turkey
Ireland	Ukraine
Israel	United Arab Emirates
Italy	United Kingdom
Japan	USA
Jordan	Vietnam
Kuwait	Yemen
Lebanon	Yugoslavia
Luxembourg	



**www.weidmuller.com** **www.weidmuller.com** **www.weidmuller.com**

**W Interconnections, Inc.**

821 Southlake Blvd., Richmond, Virginia 23236

Telephone: (800) 849-9343 Facsimile: (804) 379-2593

Email: info@weidmuller.com Website: www.weidmuller.com

**W Interconnections Canada, Inc.**

10 Spy Court, Markham, Ontario L3R-5H6

Telephone: (800) 268-4080 Facsimile: (905) 475-2798

Email: info1@weidmuller.ca Website: www.weidmuller.ca

**W Interconnections, S.A. de C.V.**

Ave. Ingenieros Civiles 204-B, Conjunto Industrial Chachapa  
Chachapa Amozoc, Puebla, 72990 Pue. Mexico

Telephone: (222) 286 62 47 Facsimile: (222) 286 62 46