


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

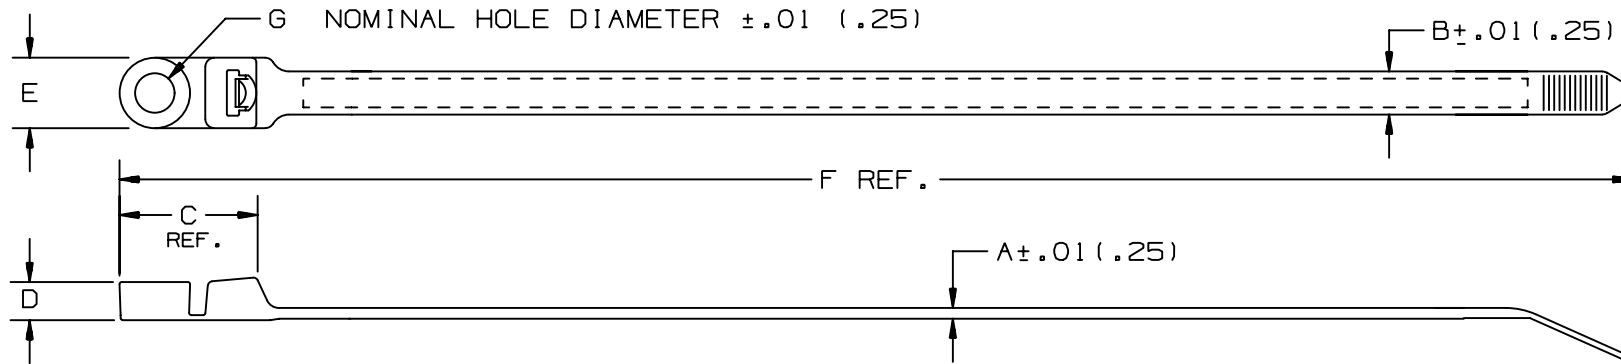

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	RECM. FASTENER	WEIGHT lbs/100pcs (g)
	MIN. in (mm)	MAX. in (mm)											
PLC2H-S25	.18 (4.8)	2.00 (51)	.075 (1.9)	.300 (7.6)	.94 (23.9)	.265 (6.7)	.500 (12.7)	9.0 (229)	.260 (6.6)	120 (534)	HEAVY	1/4 (M6) SCREW	.914 (415)
PLC4H-S25	.18 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.94 (23.9)	.265 (6.7)	.500 (12.7)	15.1 (384)	.260 (6.6)	120 (534)	HEAVY	1/4 (M6) SCREW	1.44 (653)

**NOTES:**

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
- 2) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

SS\_24665\_XX.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

PAN-TY LOCKING CLAMP TIE  
PLC HEAVY SERIES

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± .005 (.127) (XXX) ± .020 (.51)  
(.XX) ± .02 (.5) ANGLES ± .005

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	CHK'D	MAT'L	SCALE	DWG SIZE
--	-----	---		REMOVED TRADEMARK & CORRECTED MATERIAL NAME	-----	--			DRAWN BY D.L.Moody	NYLON 6.6	NONE	
--	-----	---		ADDED "NOMINAL HOLE DIAMETER" TO DIMENSION 'G'	-----	--			DATE 9-14-89			DRAWING NO. SS-24665
7	6/1/05	ERW		CHANGED MAX. BUNDLE DIA. METRIC NUMBERS TO WHOLE NUMBERS	24665	7			HVP			