


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

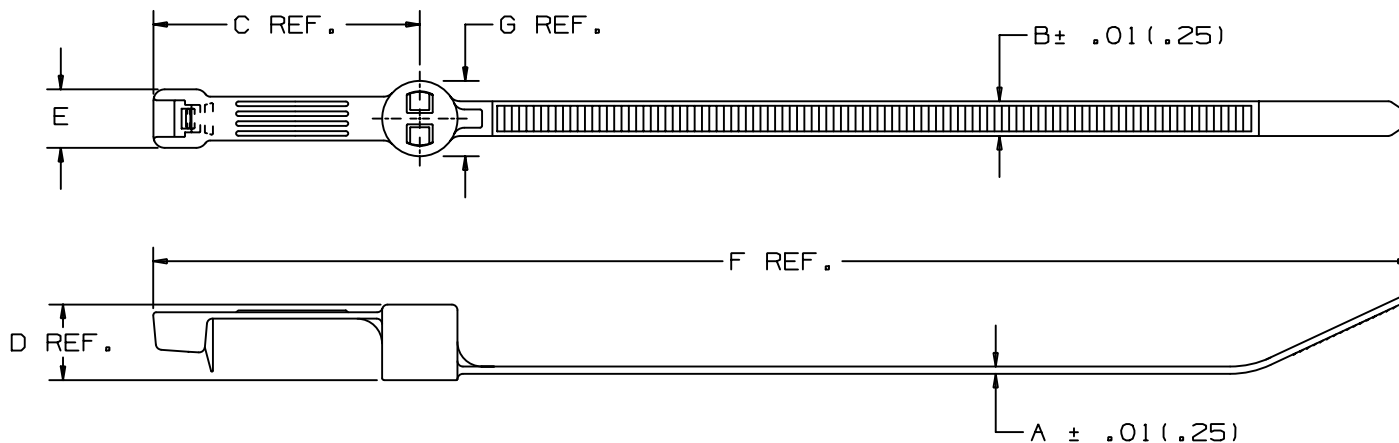

PANDUIT PART NO.*	BUNDLE DIA.		A	B	C	D	E	F	G	RECOMMENDED STUD SIZE		MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
	MIN. in (mm)	MAX. in (mm)								STUD	LENGTH			
PLST30SC	.24 (6)	1.18 (30)	.050 (1.3)	.19 (4.8)	1.45 (36.8)	.41 (10.4)	.32 (8.1)	5.74 (146)	.41 (10.4)	10-24 (5)	.375 (9)	50 (222)	STANDARD	.36 (163)
PLST50SC	.24 (6)	1.97 (50)	.050 (1.3)	.19 (4.8)	1.45 (36.8)	.41 (10.4)	.32 (8.1)	8.14 (207)	.41 (10.4)	10-24 (5)	.375 (9)	50 (222)	STANDARD	.44 (200)

NOTES:

- * 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- 2) THIS PART IS RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

LOCKING STUD MOUNT CABLE TIE
PLST__SC SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± .1(.25) (.XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± ----

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

CHANGED FORMAT FOR CONSISTENCY, REARRANGED DIM LETTERS, ADDED TOLERANCE

CORRECTED MIN LOOP TENSILE METRIC CONVERSION

26443 8

DRAWN BY CDH

DATE 08/09/91

CHK'D HVP

MAT'L: -30 HEAT STABILIZED BLACK

SCALE NONE

DRAWING NO. SS-26443

DWG SIZE A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
8	1/29/04	JABO						