


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

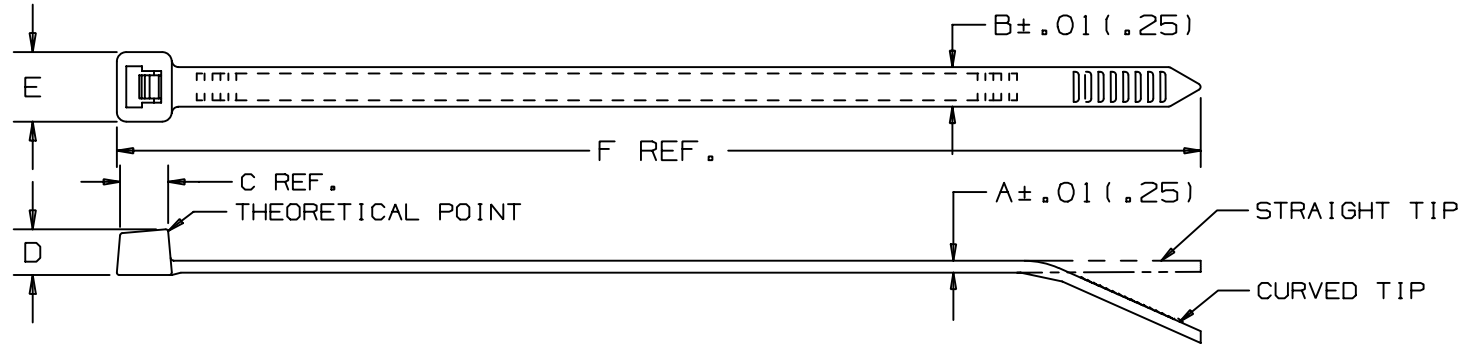

| PANDUIT PART NO. * | BUNDLE DIA. | | A in (mm) | B in (mm) | C in (mm) | D in (mm) | E in (mm) | F in (mm) | MIN. LOOP TENSILE lbs. (N) | CROSS SECTION | TIP STYLE | WEIGHT lbs./100 pcs. (g) |
|--------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|----------------------------|---------------|-----------|--------------------------|
| | MIN. in (mm) | MAX. in (mm) | | | | | | | | | | |
| PLT3I | .06 (1.5) | 3.00 (76) | .052 (1.3) | .145 (3.7) | .220 (5.6) | .180 (4.6) | .260 (6.6) | 11.4 (290) | 40 (178) | INTERMEDIATE | CURVED | .32 (145) |
| PLT4I | .06 (1.5) | 4.00 (102) | .052 (1.3) | .145 (3.7) | .220 (5.6) | .180 (4.6) | .260 (6.6) | 14.5 (368) | 40 (178) | INTERMEDIATE | CURVED | .40 (181) |
| PLT1S | .06 (1.5) | 1.00 (25) | .052 (1.3) | .190 (4.8) | .258 (6.6) | .220 (5.6) | .316 (8.0) | 4.8 (122) | 50 (222) | STANDARD | CURVED | .13 (58) |
| PLT1.5S | .06 (1.5) | 1.50 (38) | .052 (1.3) | .190 (4.8) | .258 (6.6) | .220 (5.6) | .316 (8.0) | 6.2 (157) | 50 (222) | STANDARD | CURVED | .26 (118) |
| PLT2S | .06 (1.5) | 1.88 (47.8) | .052 (1.3) | .190 (4.8) | .258 (6.6) | .220 (5.6) | .316 (8.0) | 7.4 (188) | 50 (222) | STANDARD | CURVED | .29 (132) |
| PLT2.5S | .06 (1.5) | 2.50 (63.5) | .052 (1.3) | .190 (4.8) | .265 (6.7) | .220 (5.6) | .337 (8.6) | 9.8 (249) | 50 (222) | STANDARD | CURVED | .38 (173) |
| PLT3S | .06 (1.5) | 3.00 (76) | .052 (1.3) | .190 (4.8) | .265 (6.7) | .220 (5.6) | .337 (8.6) | 11.5 (292) | 50 (222) | STANDARD | CURVED | .45 (204) |

NOTES:

- 1) RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC.
- *2) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE & PART COLOR.

SS-5540-00.PRT

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS
PAN-TY CABLE TIES
PLT SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
 (.X) ± .0005 (.XXX) ± .0010
 (.XX) ± .0010 ANGLES ± .0005

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
CEW

MAT'L:

SCALE
NONE

28 9/2/03 JABO

ADDED C REF. DIMENSION TO TIE. C DIM. WAS ALREADY IN MATRIX

5540 28

DATE
12-27-84

NYLON 6/6

DRAWING NO.
SS-5540
SHEET 2

DWG
A
SIZE

| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP |
|-----|------|----|-----|-------------|-----|---|------|-----|
| | | | | | | | | |

CHK'D
HVP