


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

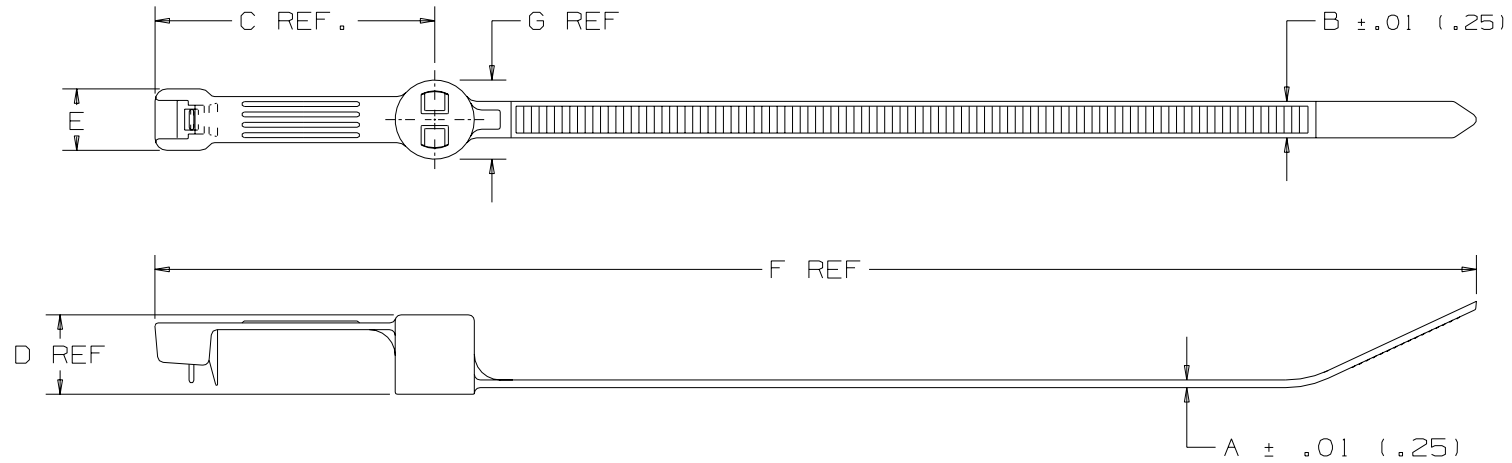

PANDUIT * PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	RECOMMENDED STUD SIZE		MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT lbs (g)/100 pcs
	MIN. in (mm)	MAX. in (mm)								STUD	LENGTH			
PRST40SC	.24 (6)	1.57 (40)	.05 (1.27)	.19 (4.8)	1.45 (37)	.41 (10.5)	.32 (8.1)	6.94 (176)	.41 (10.5)	10-24 (5)	.375 (9)	50 (222)	STANDARD	.40 (181)

NOTES:

\* SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

CAD FILENAME/LAYERS															
DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS															
PANDUIT CORP. TINLEY PARK, ILLINOIS															
RELEASABLE STUD MOUNT CABLE TIE PRST40SC															
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±.1 (.25) (.XXX) ±.020 (.51) (.XX) ±.02 (.5) ANGLES ±						UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.									
--	-----	---	CHANGED FORMAT FOR CONSISTENCY. REARRANGED DIM. LETTERS, ADDED TOLERANCE				-----	--	DRAWN BY CDH		MAT'L: -30 HEAT STABILIZED BLACK		SCALE NONE		
6	12/8/05	ERW	CORRECTED MIN. LOOP TENSILE METRIC CONVERSION TO (222), WAS (223)				26436	6	DATE 08/13/91		DRAWING NO. SS-26436		DWG A SIZE		
REV	DATE	BY	CHK	DESCRIPTION				ECN	R	CUST	SUP	CHK'D HVP			