


NYLON 6/6 (RMS-01) COLOR: NATURAL PART NO.	UV STABILIZED (RMS-46) COLOR: BLACK PART NO.	MAX. BUNDLE DIA.	LENGTH "L" APPROX.	WIDTH "W" REF.
WIT-40S	WIT-40S-UVB	3/4 (19.1)	4-1/2 (114.3)	.14 (3.6)
WIT-40R	WIT-40R-UVB	1-1/4 (31.8)	5-3/4 (146.1)	
WIT-40L	WIT-40L-UVB	1-7/8 (47.6)	7-9/16 (192.1)	
WIT-40XL	WIT-40XL-UVB	2.0 (50.8)	8-1/16 (204.8)	
WIT-40VL*	WIT-40VL-UVB*	3-3/16 (81.0)	11-5/32 (283.4)	

NOTES:

- MIN. LOOP TENSILE: 40 lbs
- COLORS: GREEN (-GN), BLUE (-BL), YELLOW (-YL), RED (-RD), NEON-GREEN (-NGN), NEON-YELLOW (-NYL), NEON-PINK (-NPK) AND NEON-ORANGE (-NOR), AVAILABLE BY SPECIAL ORDER ONLY. TO ORDER, ADD COLOR SUFFIX TO PART NO.
- FOLLOWING MATERIAL AVAILABLE BY SPECIAL ORDER ONLY:
 - 1) NYLON 6/6 UL94-VO (RMS-75), COLOR: NATURAL. TO ORDER, ADD "-VO" TO PART NO.
 - 2) NYLON 4/6 (RMS-109), HI TEMPERATURE COLOR: NATURAL TO ORDER, ADD "-HT" TO PART NO. MATERIAL HAS A UL RELATIVE THERMAL INDEX OF 266°F (130°C)
 - 3) NYLON 6/6 (RMS-73), LOW TEMPERATURE. COLOR: BLACK. TO ORDER, ADD "-ST" TO PART NO.
 - 4) NYLON 6/6, HEAT STABILIZED (RMS-47), UL94-V2. COLOR: BLACK. TO ORDER, ADD "-HS" TO PART NO.

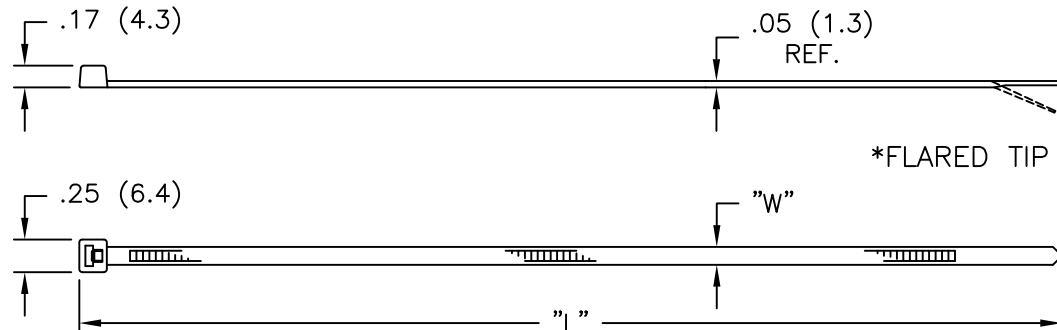

TITLE: WIT-40 SERIES		DWG IN IN (MM)		FINAL		PRINT TYPE	
FILE #	WIT-40X	DWN:	J.B.	APP:	PART #		CA
MAT'L:	SEE NOTES & TABLE	DT:	08-29-95	DT:	SEE TABLE		
RE:	RICHCO, INC.	RICHCO INC.					
		PO BOX 804238, CHICAGO, 60680					
		(773) 539-4060					

REV	DESCRIPTION	ENGR	DATE
E	SEE CO 200134 FOR CHANGES	SK	02.28.08
D	SEE ECN #587 FOR CHANGES	SM	02.19.03
C	UPDATED MAT'L NOTES AND TABLE PER CAT.	SM	05.06.02
B	CHANGED FILE NO.	SM	04.01.02
A	MAT'L RMS-46 ADDED	J.L.	6.3.98

TOLERANCES UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°