

# CNB1301 (ON2171)

## Reflective Photosensor

For contactless SW and object detection

### ■ Overview

CNB1301 is a reflective photosensor consisting of a small, thin reflective photosensor (CNB1302) to which a plastic lens is attached to increase the focal distance from 0.8 mm to 2.5 mm.

### ■ Features

- Small size, light weight: 5 mm × 4.5 mm (height: 4.0 mm)
- Focal distance: 2.5 mm
- Visible light cutoff resin is used

### ■ Applications

- Copier
- Printers
- Fax
- Cassette deck

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter		Symbol	Rating	Unit
Input (Light emitting diode)	Power dissipation *1	$P_D$	75	mW
	Forward current	$I_F$	50	mA
	Reverse voltage	$V_R$	3	V
Output (Photo transistor)	Collector-emitter voltage (Base open)	$V_{CEO}$	30	V
	Emitter-collector voltage (Base open)	$V_{ECO}$	5	V
	Collector current	$I_C$	20	mA
	Collector power dissipation *2	$P_C$	50	mW
Operating ambient temperature		$T_{opr}$	-25 to +75	°C
Storage temperature		$T_{stg}$	-30 to +80	°C

Note) \*1: Input power derating ratio is 1.36 mW/°C at  $T_a \geq 25^\circ\text{C}$



\*2: Output power derating ratio is 0.91 mW/°C at  $T_a \geq 25^\circ\text{C}$

Note) The part number in the parenthesis shows conventional part number.



■ Electrical-Optical Characteristics  $T_a = 25^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Input characteristics	Reverse current	$I_R$	$V_R = 3\text{ V}$			10	$\mu\text{A}$
	Forward voltage	$V_F$	$I_F = 50\text{ mA}$		1.3	1.5	V
Output characteristics	Collector-emitter cutoff current (Base open)	$I_{\text{CEO}}$	$V_{\text{CE}} = 10\text{ V}$			200	nA
Transfer characteristics	Collector current ratio *1	$I_C$	$V_{\text{CC}} = 5\text{ V}, I_F = 10\text{ mA}, R_L = 100\ \Omega, d = 4\text{ mm}$	0.8		5.2	mA
	Drain current *2	$I_D$	$V_{\text{CC}} = 5\text{ V}, I_F = 10\text{ mA}, R_L = 100\ \Omega$			40	$\mu\text{A}$
	Collector-emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_F = 20\text{ mA}, I_C = 0.1\text{ mA}$			0.5	V
	Rise time *3	$t_r$	$V_{\text{CC}} = 5\text{ V}, I_C = 0.1\text{ mA}, R_L = 100\ \Omega$		20		$\mu\text{s}$
	Fall time *3	$t_f$			20		$\mu\text{s}$










- Note) 1. Input and output are practiced by electricity.  
 2. This device is designed by disregarding radiation.  
 3. \*1: Output current measurement circuit



- \*2: No reflector and dark condition.  
 \*3: Switching time measurement circuit

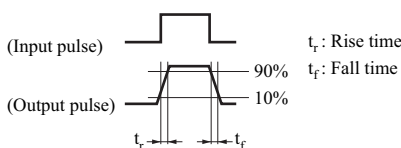


$t_r$  : Time required for the collector current to increase from 10% to 90% of its final value  
 $t_f$  : Time required for the collector current to decrease from 90% to 10% of its initial value

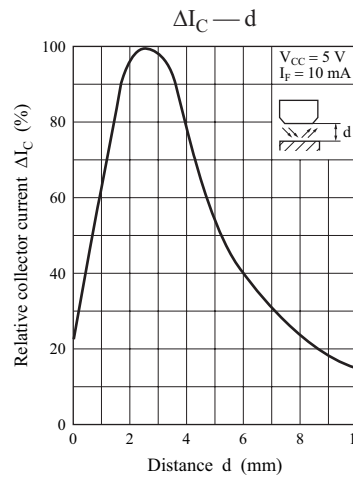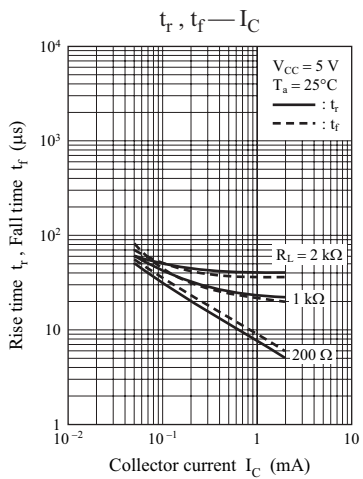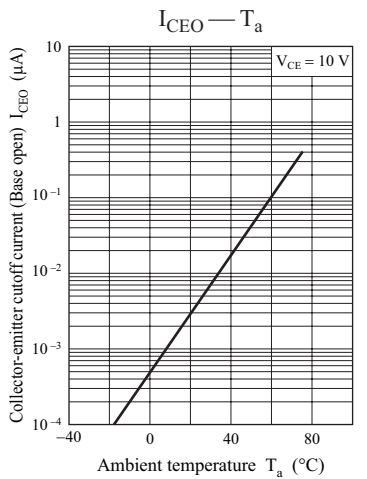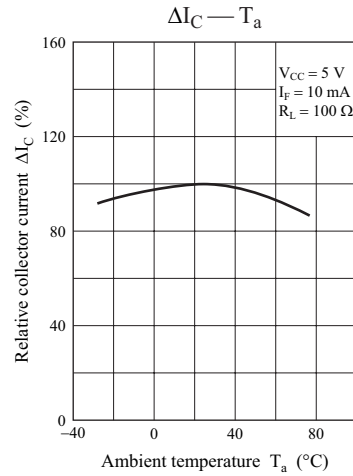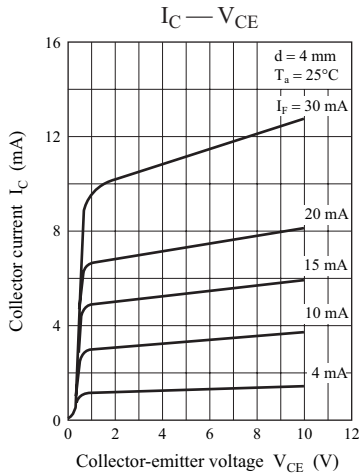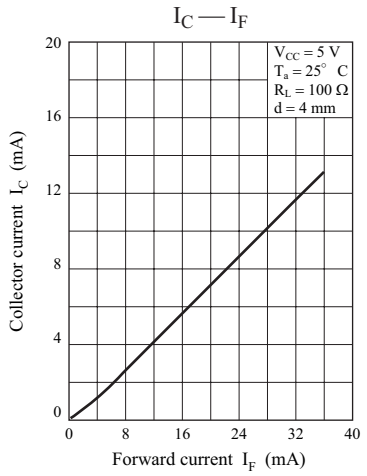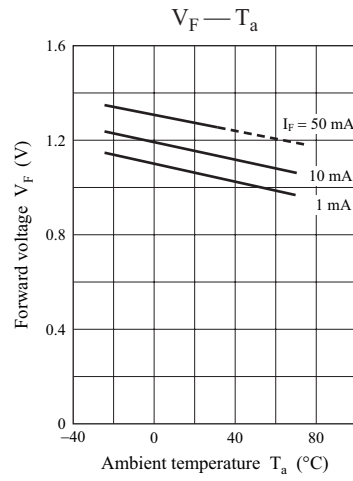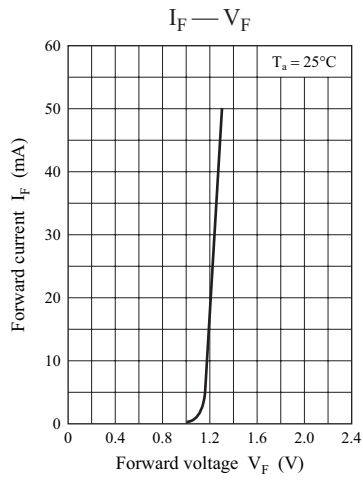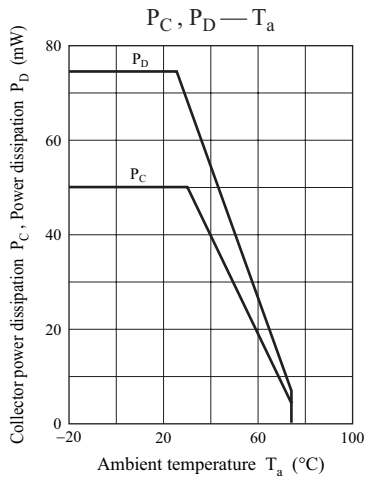

■ Package (Unit: mm)

LSSLRR4S0001

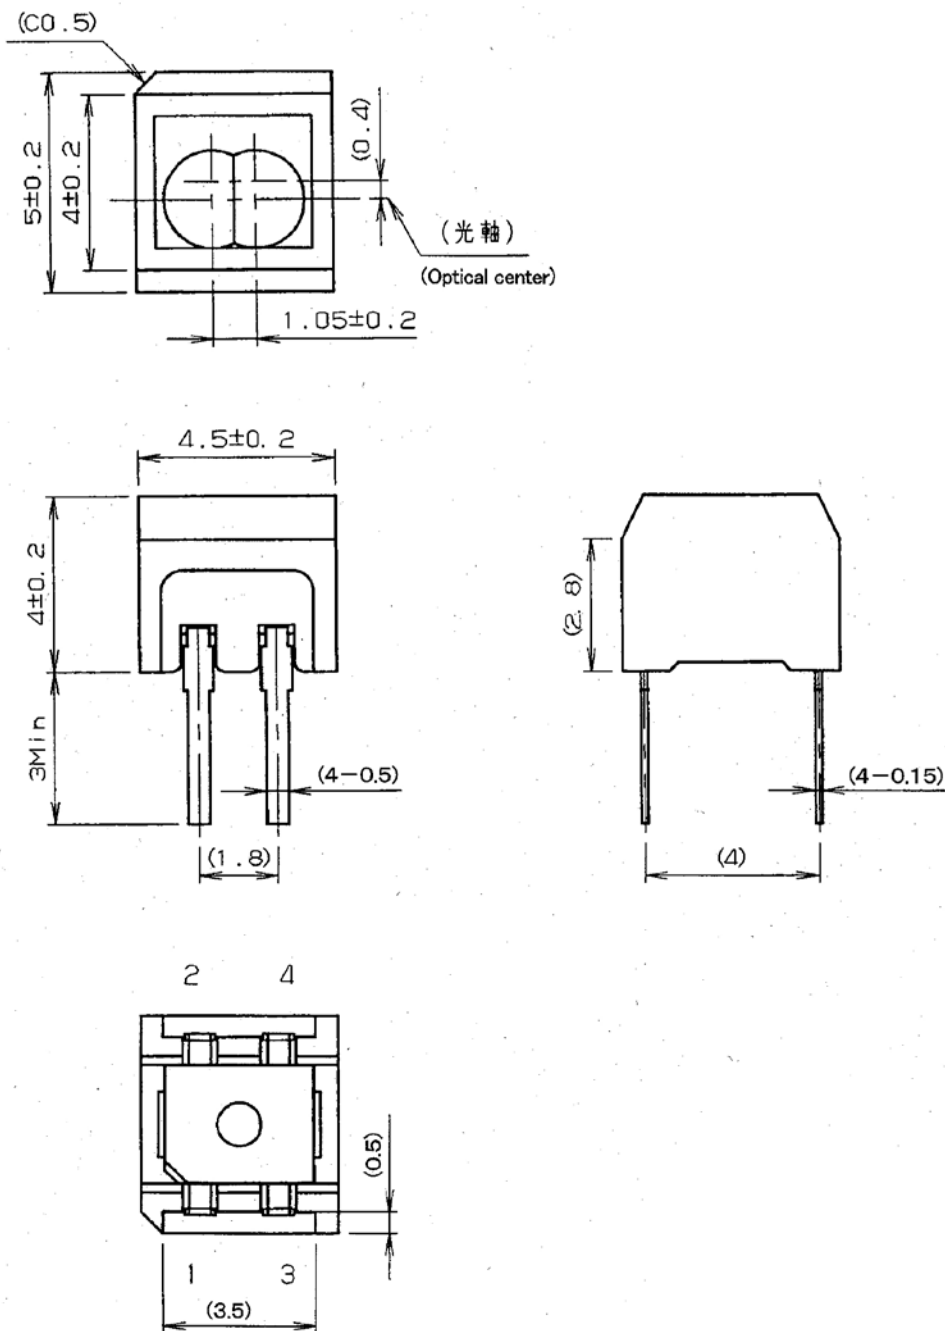

- Pin name
- 1: Anode
- 2: Cathode
- 3: Emitter
- 4: Collector

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.