THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE PRODUCTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

FG 1 BR 6 - A

- FG: FLOORGUARD
- 1: LARGE OPENING CROSSECTIONAL AREA (.1 in²)
- BR: COLOR BR=BROWN
- 6: LENGTH 6=6 FOOT 50=50 FOOT
- A: ADHESIVE BACKED

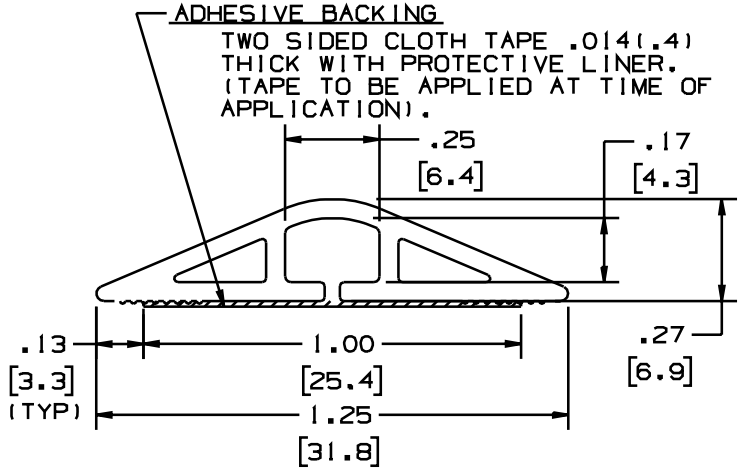

NOTES:

COLOR CODE: BR=BROWN, YL=SAFETY YELLOW, EI=ELECTRICAL IVORY, BL=BLACK

LENGTH: 6 FOOT $^{+6}_{-.2}$ in. ($1.83\text{m}^{+152\text{mm}}_{-5\text{mm}}$)

50 FOOT $^{+6}_{-.2}$ in. ($15.24\text{m}^{+152\text{mm}}_{-5\text{mm}}$)

WEIGHT: .08 lb/ft, (.115 Kg/m)

INSTRUCTIONS

1. CUT FLOORGUARD TO DESIRED LENGTH.
2. INSERT WIRES INTO FLOORGUARD.
3. APPLY TAPE TO FLOORGUARD. (TAPE IS TO BE CENTRALLY LOCATED ON THE FLOORGUARD AS SHOWN ON THE DRAWING.)
4. REMOVE RELEASE LINER FROM TAPE AND PLACE FLOORGUARD ON A CLEAN, DRY SURFACE.
5. APPLY PRESSURE TO ENTIRE LENGTH OF FLOORGUARD TO OBTAIN MAXIMUM ADHESION.

WPXD.MISC.DUCT.CUST-2
DWG NAME FG1 LAYER NO. 20

CUSTOMER DRAWING

CAD FILENAME/LAYERS
DIMENSIONS IN PARENTHESIS ARE IN METRIC

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
R	12-5-90	DW	CEF	RELEASED TO PRODUCTION	34153-2 R	WJB	

PANDUIT CORP. TINLEY PARK, ILLINOIS

FLOORGUARD FG1

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±
(.XX) ± .05 (1.3) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION.

DRAWN BY: DW
DATE: 12-4-90
CHK'D: CEF
MAT'L: FLEXIBLE VINYL
SCALE: NONE
DRAWING NO.: 34153-2
DWG SIZE: A