

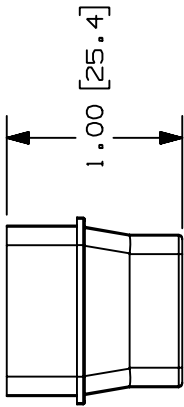



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
RFX53-X	.061 LB/10 PCS. (27.5 G/10 PCS.)

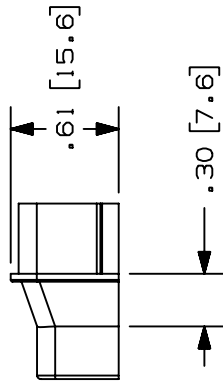

- NOTES:
- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - FOR USE IN POWER CABLING APPLICATIONS UP TO 600V OR FOR CATEGORY 5, FIBER OPTIC AND OTHER LOW VOLTAGE APPLICATIONS REQUIRING TAMPER-RESISTANCE.
 - REDUCER FITTING IS USED TO REDUCE PANDUIT'S LD5 PROFILE FITTINGS TO PANDUIT'S LD3 PROFILE RACEWAYS.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

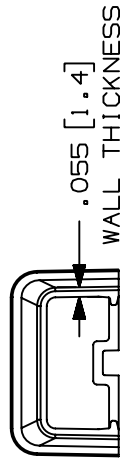

CAO FILENAME/LAYERS D35541DB_RFX53_C_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

REDUCER FITTING (RFX53-X)
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ±.005(.3)
(.XX) ±.010(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

SCALE FULL

DRAWING NO.

35541-68

DWG

A

SIZE

DRAWN BY MAT'L:

RABO

DATE

07-23-97

CHK'D

HIW

HIW

HIW

HIW

35541-68

35541-54

ECN - R

SUP

HIW

HIW

CHK

CHK

08-11-97

07-23-97

DATE

BY

DESCRIPTION

RELEASED TO PRODUCTION

FROM 35541-54 TO 35541-68

A. INCORRECT DRAWING NUMBER WAS CHANGED