




**FLEXSTRIP\* JUMPERS**

+ CONDUCTOR PITCH "A"	MARGIN C (min.)		THICKNESS D (MAX.)		PIN DIAMETER E ±0,025 (±.001")		NUMBER OF CONDUCTORS	
	Cat.Ref.	mm (inch)	mm (inch)	mm (inch)	mm (inch)	min.	max.	
1	1,27 .050"	0,25 .010"	0,64 .025"	0,320 .0126"	2 - 30			
6	1,90 .075"	0,38 .015"	0,84 .033"	0,404 .0159"	2 - 30			
2	2,54 .100"	0,51 .020"	0,84 .033"	0,511 .0201"	2 - 30			
3	3,18 .125"	1,52 .060"	0,84 .033"	0,511 .0201"	2 - 25			
4	3,81 .150"	1,52 .060"	0,84 .033"	0,511 .0201"	2 - 20			
5	5,08 .200"	1,52 .060"	0,84 .033"	0,511 .0201"	2 - 15			

2/86

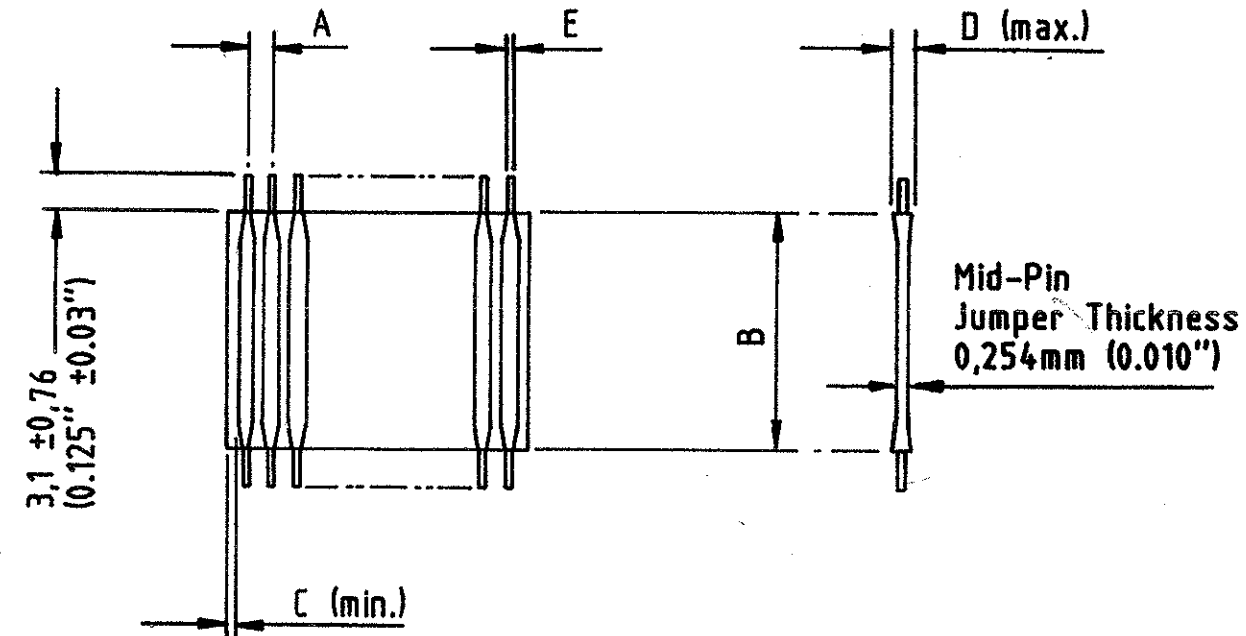

Dimensions are shown in mm (inches.)  
+ Tolerance on Pitch ±0,25 (0.01") non-cumulative.

INSULATION LENGTH B ±1.57 (±0.062")		
mm	(inch)	Cat. Ref.
25.4	1	1
38.1	1½	1.5
50.8	2	2
63.5	2½	2.5
76.2	3	3
88.9	3½	3.5
101.6	4	4
114.3	4½	4.5
127	5	5
139.7	5½	5.5
152.4	6	6


**PROPERTIES :-**

- Insulation Material - Nomex#
- Temperature Rating - 105°C
- Current Rating - 2 amps
- U.L. Style Number - 5188

**NOTES:-**

- \* Trademark of Thomas & Betts Corporation
- \* Registered trademark of E.I. Du Pont de Nemours

**CATALOGUE NUMBERING SYSTEM**

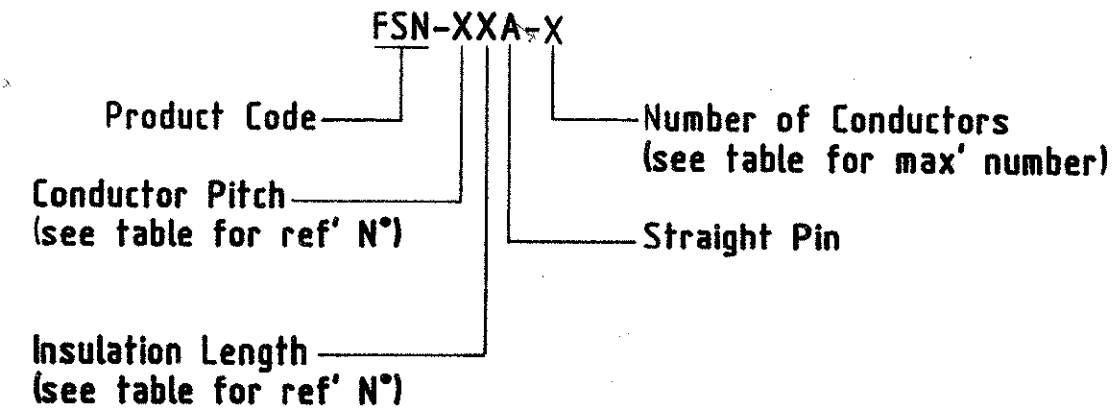

**EXAMPLE:-**


**FSN -22A - 15**

- FSN - Flexstrip Jumper With Nomex Insulation
- 2 - Conductor Pitch 2.54 (0.100)
- 2 - Insulation Length 50.8 (2)
- A - Straight Pin
- 15 - Number of Conductors 15

**T&B** THOMAS & BETTS INTERNATIONAL  
EUROPEAN ENGINEERING DIVISION

DRG. N°  
**3S-10018**

IMPERIAL DIMENSIONS SHOWN THUS [ ]  
TOLERANCES  
0000 EQUALS ± .0002  
000 EQUALS ± .003  
00 EQUALS ± .015



**THIRD ANGLE PROJECTION**

REV	DESCRIPTION	DATE	BY	MATERIAL	PARTNAME
				HEAT TREAT	
				FINISH	PRODUCT CODE
				SCALE	TOLERANCES UNLESS OTHERWISE SPECIFIED
				DR.	<b>FSN-21A-2</b>
				CH.	
				APP.	
0					<b>tyco C8-1437139-3</b>
					<b>Electronics REV 0 SHT 1 of 1</b>