


REV	DATE	DESCRIPTION	DATE	DWN	APVD
N	19JUN92	REDRAWN ON CAD	19JUN92	JRK	LC
P	31JUL92	REV PER ECN EH-0034	31JUL92	JRK	LC
Q	02FEB94	REV PER ECN EH-0174	02FEB94	FJG	LC
R	17FEB94	REV PER ECN EH-0171	17FEB94	FJG	LC
S	10OCT94	REV PER ECN EH-0244	10OCT94	YTP	RS
T	15DEC94	REV PER ECN 0410-267-94	15DEC94	MKB	RS
U	02AUG96	REV PER ECN 0810-0138-96	02AUG96	LMH	RS/RS

- CABLE CERTIFIED TO: -UL CABLE STYLE: 2651.
  - CABLE PHYSICAL SPECIFICATIONS:
    - TEMPERATURE RATING: -20°C TO +105°C
    - FLAMMABILITY: -UL: VWI
    - INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
    - CONDUCTORS: 24 AWG 7/32 OVERCOAT STRANDED TINNED COPPER
  - ELECTRICAL REQUIREMENTS:
    - VOLTAGE: 300 VOLTS
- △4 EDGE MARK ON CONDUCTOR #1.
- △5 LENGTH PER REEL: 250 FT. REEL MAY CONTAIN SEPARATE LENGTHS. 20 FT. MIN PER LENGTH. TWO LENGTHS MAX PER REEL.
- △6 LENGTH PER REEL: 100 FT. REEL MAY CONTAIN SEPARATE LENGTHS. 20 FT. MIN PER LENGTH. TWO LENGTHS MAX PER REEL.

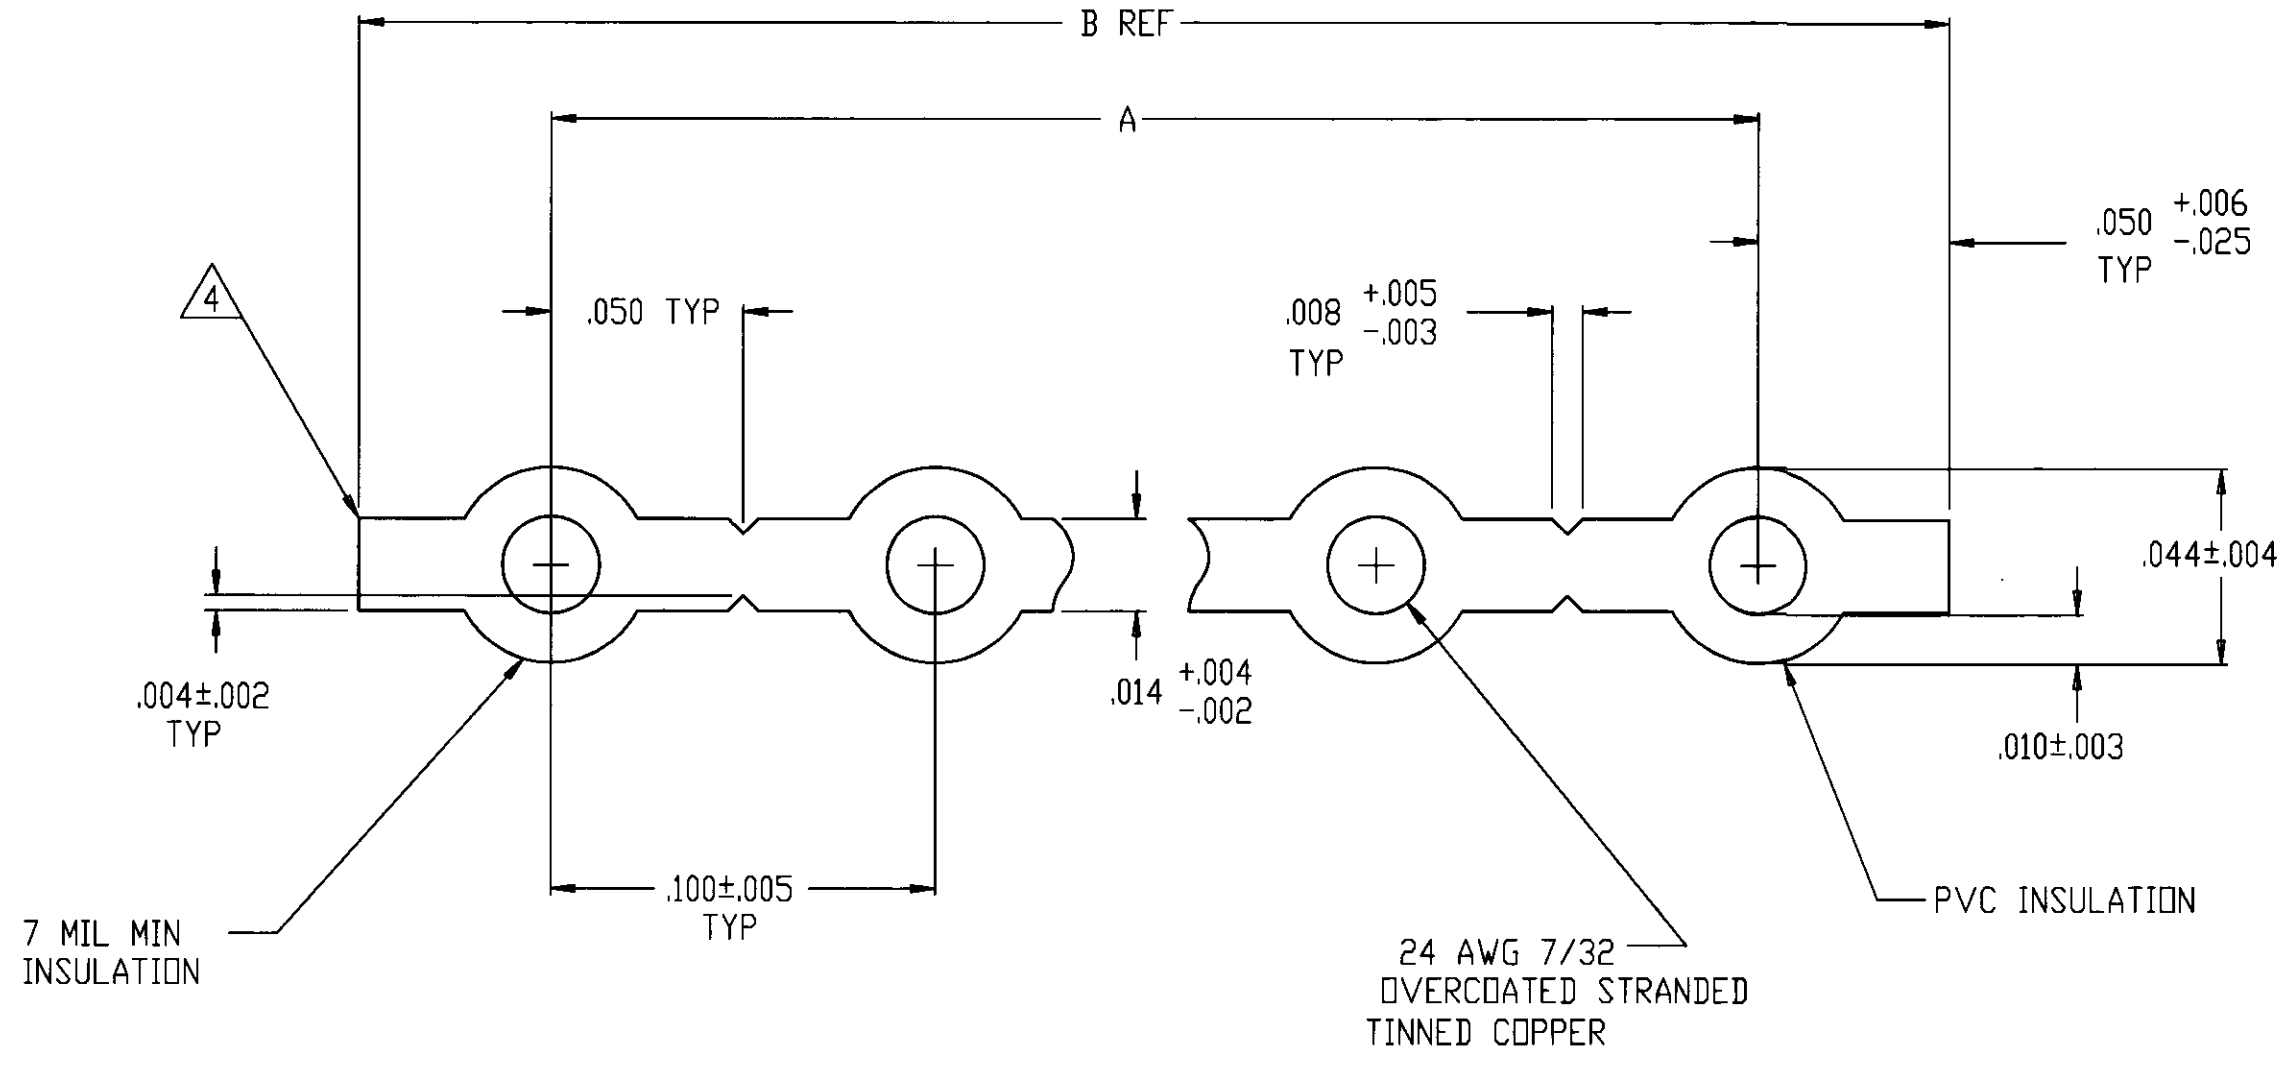

REEL LENGTH	B REF	A	NO. OF CNDS	PART NUMBER
2.800	2.700±.010	28	5-642004-8	
2.700	2.600±.010	27	5- -7	
2.600	2.500±.010	26	5- -6	
2.500	2.400±.010	25	5- -5	
2.400	2.300±.010	24	5- -4	
2.300	2.200±.010	23	5- -3	
2.200	2.100±.010	22	5- -2	
2.100	2.000±.009	21	5- -1	
2.000	1.900±.009	20	5- -0	
1.900	1.800±.009	19	4- -9	
1.800	1.700±.009	18	4- -8	
1.700	1.600±.009	17	4- -7	
1.600	1.500±.008	16	4- -6	
1.500	1.400±.008	15	4- -5	
1.400	1.300±.008	14	4- -4	
1.300	1.200±.008	13	4- -3	
1.200	1.100±.008	12	4- -2	
1.100	1.000±.007	11	4- -1	
1.000	.900±.007	10	4- -0	
.900	.800±.007	9	3- -9	
.800	.700±.007	8	3- -8	
.700	.600±.007	7	3- -7	
.600	.500±.006	6	3- -6	
.500	.400±.006	5	3- -5	
.400	.300±.005	4	3- -4	
.300	.200±.005	3	3- -3	
.200	.100±.005	2	3- -2	
2.800	2.700±.010	28	2- -8	
2.700	2.600±.010	27	2- -7	
2.600	2.500±.010	26	2- -6	
2.500	2.400±.010	25	2- -5	
2.400	2.300±.010	24	2- -4	
2.300	2.200±.010	23	2- -3	
2.200	2.100±.010	22	2- -2	
2.100	2.000±.009	21	2- -1	
2.000	1.900±.009	20	2- -0	
1.900	1.800±.009	19	1- -9	
1.800	1.700±.009	18	1- -8	
1.700	1.600±.009	17	1- -7	
1.600	1.500±.008	16	1- -6	
1.500	1.400±.008	15	1- -5	
1.400	1.300±.008	14	1- -4	
1.300	1.200±.008	13	1- -3	
1.200	1.100±.008	12	1- -2	
1.100	1.000±.007	11	1- -1	
1.000	.900±.007	10	1- -0	
.900	.800±.007	9	- -9	
.800	.700±.007	8	- -8	
.700	.600±.007	7	- -7	
.600	.500±.006	6	- -6	
.500	.400±.006	5	- -5	
.400	.300±.005	4	- -4	
.300	.200±.005	3	- -3	
.200	.100±.005	2	642004-2	

CABLE MARKING PATTERN		REEL LENGTH		B REF	A	NO. OF CNDS	PART NUMBER
19JUN92 J.KOPPENHEFFER		31JUL92 L.CONLEY					
DIMENSIONS INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		AMP Incorporated Harrisburg, PA 17105-3608			
1 PLC DEC ±.1 2 PLC DEC ±.02 3 PLC DEC ±.005 4 PLC DEC ±.0005 ANGLES ±		APPLICATION SPEC		CABLE, MULTIPLE CONDUCTOR .100CL, 24AWG			
MATERIAL		FINISH		NETWT	SCALE	DRAWING NO	REV
					A1 00779	642004	1 1 U
				CUSTOMER DRAWING	SCALE 20:1		