


Product SKU:	C2015.21.05
Product Description:	Hook-Up Wire, UL 1007, UL 1569, CSA TR-64, Gauge Size (AWG): 24, Conductor/Strands: 7/32, Jacket: Premium Grade PVC, Temperature Range: -20°C to +105°C - Yellow - 1000 Ft. Spool
Product Category:	Electronics - Hook-Up Wire - UL 1007, UL 1569, CSA TR-64 - STRANDED CONDUCTORS - Yellow

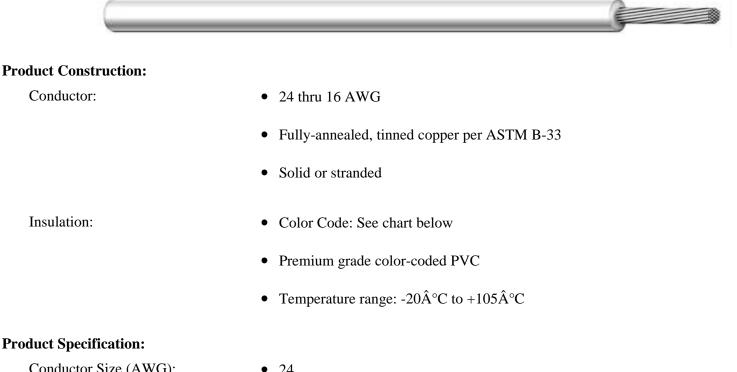

Conductor Size (AWO).	• 24
Conductor/Strands:	• 7/32
No. of Pairs:	• 1
Jacket Color:	• Yellow
Nominal Insulation Thickness (in):	• 0.016
Nominal Insulation Thickness	• 0.40

(mm): Nominal Outside Diameter (in): • 0.056

Nominal Outside Diameter • 1.42 (mm):

Standard Packaging: • 1000' Spool

Standard Package Quantity:	• 1
UPC #:	• 079407765607
Put-up:	• 1000
SCC-14:	• 50079407765600
Cube:	• 201.756
Weight Per Unit of Measure:	• .0032
ColorOption:	• Yellow
Product Information:	
Applications:	• Internal wiring of electrical and electronic equipment
	• Internal wiring of panels and meters
	• Point-to-point wiring
	• Suggested voltage rating: 300 Volts
Compliances:	• CSA TR-64 - 90°C, 300V
	• Designed to Meet UL VW-1 Vertical Wire Flame Test
	• UL Style 1007 - 80°C, 300V
	• UL Style 1569 - 105°C, 300V
Packaging:	• 10,000 foot (3048m) Reels
	• 1000' (305m) Spools
	• Other put-ups available- consult Customer Service

Reference Charts

Color Code Chart

Technical Specifications

Unit Conversion Factors Cable Design Equations - Balanced Pair Insulation and Jacket Properties Temperature Conversion Chart Decimal and Unit Conversion Factors Cable Design Equations - Braid Shield AWG Conductor Chart Conduit Capacity Chart Cable Design Equations - Coaxial Cable Engineering Prefixes Coax Connector Cross Reference Glossary







