

TAS5342DDV6EVM

This user's guide describes the operation of the evaluation module for the TAS5342 Digital Amplifier Power Output Stage using the TAS5508B Digital Audio PWM Processor from Texas Instruments. The user's guide also provides measurement data and design information like schematic, bill of materials, and PCB layout.

Contents

1	Overview	3
	1.1 TAS5342DDV6EVM Features.....	4
	1.2 PCB Key Map	6
2	Quick Setup Guide.....	6
	2.1 Electrostatic Discharge Warning.....	6
	2.2 Unpacking the EVM	7
	2.3 Power Supply Setup.....	7
	2.4 Speaker Connection.....	7
	2.5 GUI Software Installation	7
3	Protection	8
	3.1 Short-Circuit Protection and Fault-Reporting Circuitry	8
	3.2 Fault Reporting.....	8
4	TAS5342DDV6EVM Performance.....	9
	4.1 THD+N vs Power (BTL –4 Ω)	11
	4.2 THD+N vs Power (BTL –6 Ω)	12
	4.3 THD+N vs Power (BTL –8 Ω)	12
	4.4 THD+N vs Power (PBTL –2 Ω).....	13
	4.5 THD+N vs Power (PBTL –3 Ω).....	13
	4.6 THD+N vs Frequency (BTL –4 Ω)	14
	4.7 THD+N vs Frequency (BTL – 6 Ω).....	14
	4.8 THD+N vs Frequency (BTL –8 Ω)	15
	4.9 THD+N vs Frequency (PBTL –2 Ω).....	15
	4.10 THD+N vs Frequency (PBTL –3 Ω).....	16
	4.11 FFT Spectrum with –60-dBFS Tone (BTL)	16
	4.12 FFT Spectrum With –60-dBFS Tone (PBTL)	17
	4.13 Idle Noise FFT Spectrum (BTL)	17
	4.14 Idle Noise FFT Spectrum (PBTL)	18
	4.15 Channel Separation.....	18
	4.16 Frequency Response (BTL).....	19
	4.17 Frequency Response (PBTL).....	19
	4.18 High-Current Protection (BTL).....	20
	4.19 High-Current Protection (PBTL)	20
	4.20 Pop/Click (BTL).....	21
	4.21 Pop/Click (PBTL)	21
	4.22 Output Stage Efficiency	22
	4.23 Subwoofer Lineout THD vs Output Voltage	22
	4.24 Subwoofer Lineout THD vs Frequency.....	23
	4.25 Subwoofer Lineout Frequency Response.....	23
5	Related Documentation from Texas Instruments	24

PurePath Digital, Equibit are trademarks of Texas Instruments.
Windows is a trademark of Microsoft Corporation.

5.1	Additional Documentation	24
Appendix A	Design Documents	25

List of Figures

1	Integrated PurePath Digital™ Amplifier System	5
2	Physical Structure for the TAS5342DDV6EVM (Approximate Layout)	6
3	TAS5508 GUI Window	8
4	THD+N vs Power (BTL – 4 Ω)	11
5	THD+N vs Power (BTL –6 Ω)	12
6	THD+N vs Power (BTL –8 Ω)	12
7	THD+N vs Power (PBTL –2 Ω)	13
8	THD+N vs Power (PBTL –3 Ω)	13
9	THD+N vs Frequency (BTL –4 Ω)	14
10	THD+N vs Frequency (BTL – 6 Ω)	14
11	THD+N vs Frequency (BTL –8 Ω)	15
12	THD+N vs Frequency (PBTL –2 Ω)	15
13	THD+N vs Frequency (PBTL –3 Ω)	16
14	FFT Spectrum with –60-dBFS Tone (BTL)	16
15	FFT Spectrum with –60-dBFS Tone (PBTL)	17
16	Idle Noise FFT Spectrum (BTL)	17
17	Idle Noise FFT Spectrum (PBTL)	18
18	Channel Separation	18
19	Frequency Response (BTL)	19
20	Frequency Response (PBTL)	19
21	High-Current Protection (BTL)	20
22	High-Current Protection (PBTL)	20
23	Pop/Click (BTL)	21
24	Pop/Click (PBTL)	21
25	Output Stage Efficiency	22
26	Subwoofer Lineout THD vs Output Voltage	22
27	Subwoofer Lineout THD vs Frequency	23
28	Subwoofer Lineout Frequency Response	23

List of Tables

1	TAS5342DDV6EVM Specification	3
2	Recommended Supply Voltages	7
3	TAS5342 Warning/Error Signal Decoding	9
4	General Test Conditions	9
5	TAS5508B Register Settings	9
6	Electrical Data	9
7	Audio Performance	10
8	Audio Performance Subwoofer Line Output	10
9	Thermal Specification	10
10	Physical Specifications	11
11	Related Documentation from Texas Instruments	24

1 Overview

The TAS5342DDV6EVM PurePath Digital™ customer evaluation module demonstrates the integrated circuits TAS5342DDV and TAS5508BPAG from Texas Instruments (TI).

The TAS5342DDV is a high-performance, integrated stereo Digital Amplifier Power Stage designed to drive 4-Ω speakers at up to 100 W per channel. The device incorporates TI Equibit™ technology and is designed to be used with TI Equibit™ modulators. This system requires only a simple passive demodulation filter to deliver high-quality, high-efficiency audio amplification.

The TAS5508BPAG is a high-performance, 32-bit (24-bit input) multichannel PurePath Digital™ pulse width modulator (PWM) based on Equibit™ technology with fully symmetrical AD modulation scheme. The device also has digital audio processing (DAP) that provides 48-bit signal processing, advanced performance, and a high level of system integration. The device has interfaces for headphone output and power supply volume control (PSVC).

This EVM is configured with four BTL channels, one PBTL (parallel BTL) channel for the center channel, and a subwoofer lineout using the DRV600 line driver.

The DRV600RTJ is a stereo line driver designed to allow the removal of the DC-blocking capacitors for reduced component count and cost. The DRV600RTJ is ideal for single-supply electronics where size and cost are critical design parameters. The DRV600RTJ is capable of driving two VRMS into a 600-Ω load with a 3.3-V supply. The DRV600RTJ has a fixed gain of -1.5 V/V. Independent shutdown control for the left and right audio channels is implemented.

This EVM, together with a TI input-USB board, is a complete 5-channel + subwoofer line-output digital audio amplifier system which includes digital input (S/PDIF), analog inputs, interface to a personal computer (PC), and DAP features like digital volume control, input and output mixers, automute, tone controls, loudness, EQ filters, and dynamic range compression (DRC). Configuration options are available for power stage failure protection.


Table 1. TAS5342DDV6EVM Specification

Key Parameters	
Output stage supply voltage	0 V – 31.5 V
Number of channels	4 × BTL, 1 × PBTL
Load impedance BTL	4–8 Ω
Load impedance PBTL	2–8 Ω
Output power BTL	120 W / 4 Ω 10% THD or 87 W / 6 Ω / 10% THD
Output power PBTL	225 W / 2 Ω / 10% THD
DNR	>102 dB
PWM processor	TAS5508BPAG
Output stage	TAS5342DDV
Other features	Subwoofer line output

Overview

This 5-channel system plus subwoofer line output is designed for home theater applications such as A/V receivers, DVD receivers, DVD mini-component systems, or home theater in a box (HTIB).

This document covers EVM specifications, audio performance and power efficiency measurements graphs, and design documentation that includes schematics, parts list, layout, and mechanical design.

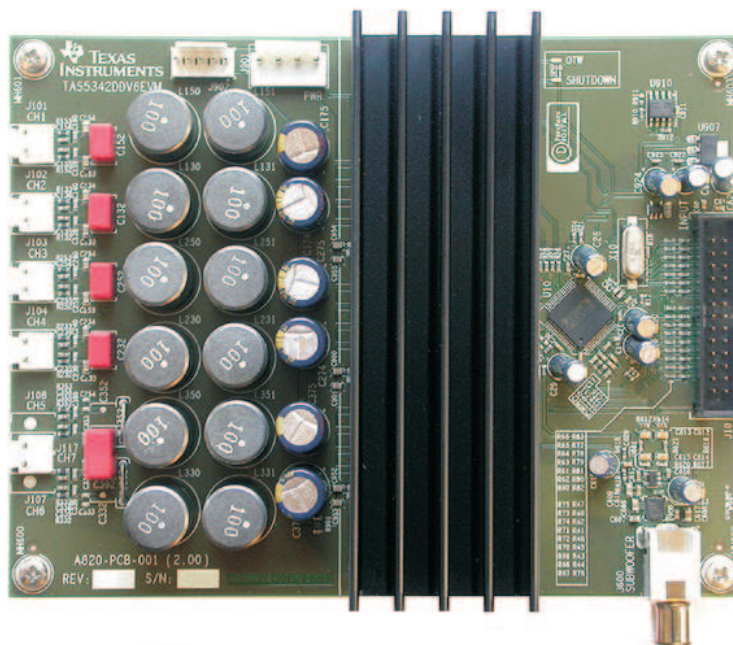

Gerber (layout) files are available at www.ti.com.

The EVM is delivered with cables and an Input-USB board to connect to an input source and be controlled from a PC.

1.1 TAS5342DDV6EVM Features

- 5/6-channel PurePath Digital™ evaluation module
- Subwoofer line output (LFE Output).
- Self-contained protection system (short circuit and thermal).
- Standard I²S and I²C/control connector for TI input board
- Double-sided, plated-through PCB layout.


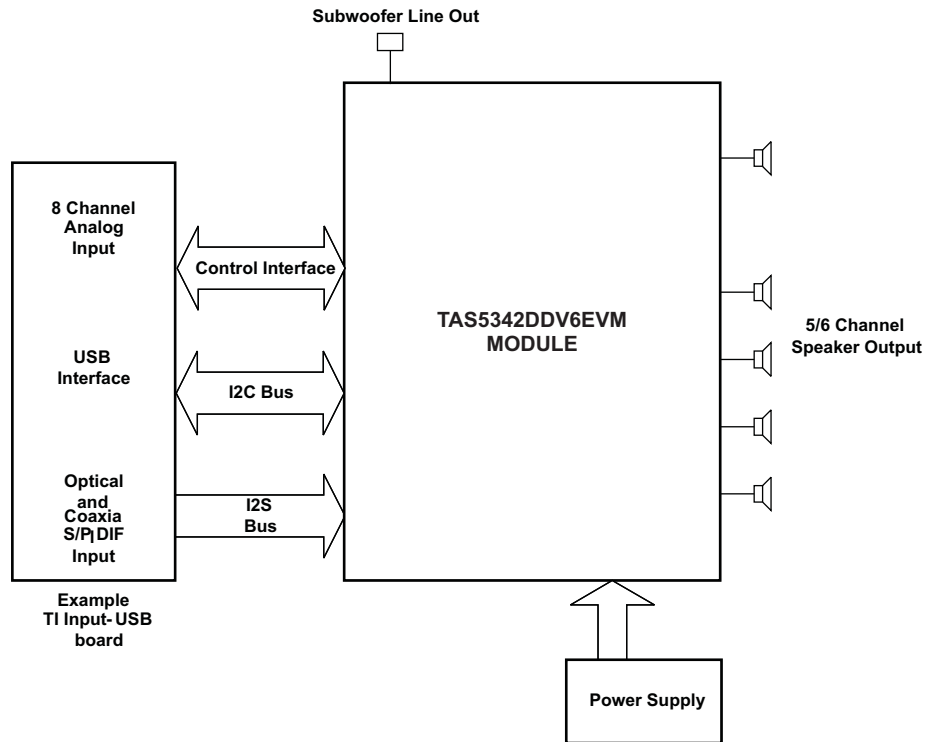


Figure 1. Integrated PurePath Digital™ Amplifier System

1.2 PCB Key Map

Physical structure for the TAS5342DDV6EVM is illustrated in [Figure 2](#).

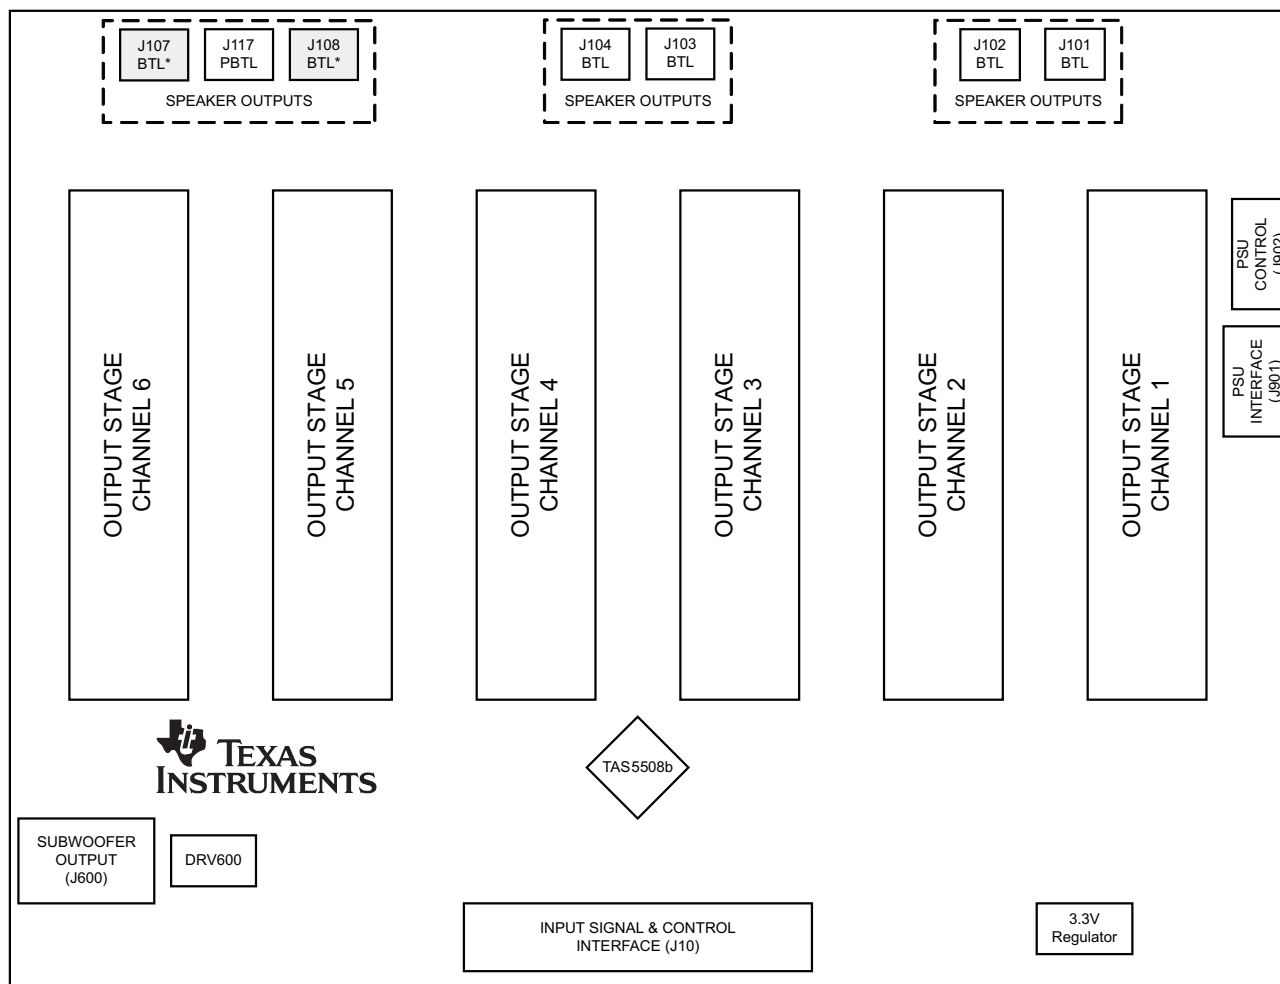

*: Config Option

Figure 2. Physical Structure for the TAS5342DDV6EVM (Approximate Layout)

2 Quick Setup Guide

This section describes the TAS5342DDV6EVM board in regards to power supplies and system interfaces. Included is information regarding handling and unpacking, absolute operating conditions, and a description of the factory default switch and jumper configuration. A step-by-step guide explains how to configure the TAS5342DDV6EVM for device evaluation.

2.1 Electrostatic Discharge Warning

Many of the components on the TAS5342DDV6EVM are susceptible to damage by electrostatic discharge (ESD). Customers are advised to observe proper ESD handling precautions when unpacking and handling the EVM, including the use of a grounded wrist strap at an approved ESD workstation.

CAUTION

Failure to observe ESD handling procedures may result in damage to EVM components.

2.2 Unpacking the EVM

On opening the TAS5342DDV6EVM package, ensure that the following items are included:

- 1 pc. TAS5342DDV6EVM board using one TAS5508BPAG and three TAS5342DDV.
- 1 pc. TI Input USB Board 2 for interfacing TAS5342DDV6EVM with S/PDIF/analog sources and PC for control.
- 1 pc. Signal and Control Interface IDC cable for connection to a TI Input USB Board 2.
- 1 pc. Cable for connecting Input-USB board to a USB port on a PC for TAS5508B control by software.
- 1 pc. Power supply cable for a regulated power supply (H-bridge supply).
- 1 pc. AC-to-DC external 15-V power supply (system supply).
- 4 pc. AC Input Clips for external 15-V power supply (US, Europe, UK, and Australia).
- 1 pc. PurePath Digital™ CD-ROM.

If any of the items are missing, contact the Texas Instruments Product Information Center nearest you to inquire about a replacement.

Connect Input-USB board to TAS5342DDV6EVM using the delivered IDC cable.

2.3 Power Supply Setup

To power up the EVM, two power supplies are needed. One for system power, logic, and gate-drive, and one for output stage supply. The H-bridge power supply is connected to the EVM using the delivered power cable White/Black, White/Black. The system power supply is supplied from the enclosed external 15-V wall plug adapter.

Table 2. Recommended Supply Voltages

Description	Voltage Limitations	Current Requirement	Cable
Output stage power supply	0 – 31.5 V	10 A	White/Black

CAUTION

Applying voltages above the limitations given in [Table 2](#) may cause permanent damage to your hardware.

Note: The length of the power supply cable must be minimized. Increasing the length of the PSU cable is equal to increasing the distortion for the amplifier at high output levels and low frequencies.

2.4 Speaker Connection

CAUTION

Both positive and negative speaker outputs are floating and may not be connected to ground (e.g., through an oscilloscope).

2.5 GUI Software Installation

The TAS5508 GUI provides easy control of all registers in TAS5508B. To install the GUI, run the setup file from the PurePath Digital™ CD-ROM.

After installation, turn on power supplies and connect USB cable to Input-USB board.

Start the GUI program from Windows™ menu. Start up of the GUI takes a few seconds.



Figure 3. TAS5508 GUI Window

From the files menu, load the configuration file:

TAS5342DDV6EVM Configuration (1.00).cfg

The file is located on the PurePath Digital™ CD-ROM. This file contains all settings for a default setup of the EVM.

For easy access of the file, copy the files into the directory where the GUI is installed. Default is C:\Program Files\Texas Instruments Inc\TAS5508\.

For more advanced use of the GUI, see the GUI User's Guide and data manual for TAS5508B ([SLES162](#)).

3 Protection

This section describes the short-circuit protection and fault-reporting circuitry of the TAS5342 device.

3.1 Short-Circuit Protection and Fault-Reporting Circuitry

The TAS5342 is a self-protecting device that provides fault reporting (including high-temperature protection and short-circuit protection). The TAS5342 is configured in back-end auto-recovery mode and therefore resets automatically after all errors (M1, M2, and M3 is set low); see the data sheet ([SLAS557](#)) for further explanation. This mean that the device restart itself after an error occasion and reports shortly thereafter through the \overline{SD} error signal.

3.2 Fault Reporting

The \overline{OTW} and \overline{SD} outputs from TAS5342 indicate fault conditions. See the TAS5342 data manual for a description of these pins.

Table 3. TAS5342 Warning/Error Signal Decoding

\overline{OTW}	\overline{SD}	Device Condition
0	0	High-temperature error and/or high-current error
0	1	High-temperature warning
1	0	Undervoltage lockout or high-current error
1	1	Normal operation, no errors/warnings

The temperature warning signals at the TAS5342DDV6EVM board are wired-OR to one temperature warning signal (\overline{OTW} – pin 22 in the control interface connector). Shutdown signals are wired-OR into one shutdown signal (\overline{SD} – pin 20 in the control interface connector).

The shutdown signals together with the temperature warning signal give chip-state information as described in the [Table 3](#). device fault-reporting outputs are open-drain outputs.

4 TAS5342DDV6EVM Performance

Table 4. General Test Conditions

General Test Conditions	Notes
Output stage supply voltage:	31.5 V Laboratory power supply (EA-PS 7065-10A)
Load impedance BTL:	4–8 Ω
Load impedance PBTL:	2–4 Ω
Input signal	1 kHz sine
Sampling frequency	48 kHz
Gain setting in TAS5508B	0 dB
Measurement filter	AES17 and AUX0025
TI input board	Input-USB2 Rev 1
EVM configuration file	Ver 1.00 TAS5342DDV6EVM Configuration (1.00).cfg

Note: These test conditions are used for all tests, unless otherwise specified.

Table 5. TAS5508B Register Settings

Register	Register	Value	Notes
Modulation Index Limit	0x16	0x02	Set modulation index to 97.7%
Master Volume	0xD9	00 00 00 48	Master volume set to 0 dB

Note: These register settings are used for all test, unless otherwise specified.

Table 6. Electrical Data

Electrical Data	Notes/Conditions
Output power, BTL, 4 Ω :	90 W 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$
Output power, BTL, 4 Ω :	120 W 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$
Output power, BTL, 6 Ω :	66 W 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$
Output power, BTL, 6 Ω :	87 W 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$
Output power, BTL, 8 Ω :	51 W 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$
Output power, BTL, 8 Ω :	68 W 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$
Output power, PBTL, 2 Ω :	170 W 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$
Output power, PBTL, 2 Ω :	225 W 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$
Output power, PBTL, 3 Ω :	130 W 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$
Output power, PBTL, 3 Ω :	170 W 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$
Maximum peak current, BTL:	>10 A 1-kHz burst, 1 Ω , $R_{OC} = 27 \text{ k}\Omega$
Maximum peak current, PBTL:	>20 A 1-kHz burst, 1 Ω , $R_{OC} = 27 \text{ k}\Omega$
Output stage efficiency:	90% 2 x channels, 8 Ω
Damping factor BTL:	8.5 1 kHz, relative to 4- Ω load
Damping factor PBTL:	9.4 1 kHz, relative to 2- Ω load

Table 6. Electrical Data (continued)

Electrical Data	Notes/Conditions	
H-bridge supply current:	<190 mA	1 kHz, -60-dBFS signal
Idle power consumption:	5.99 W	H-bridge supply, -60-dBFS input signal

Table 7. Audio Performance

Audio Performance	Notes/Conditions	
THD+N, BTL, 4 Ω:	1 W	<0.06 % 1 kHz
THD+N, BTL, 4 Ω:	10 W	<0.15 % 1 kHz
THD+N, BTL, 4 Ω:	50 W	<0.095 % 1 kHz
THD+N, BTL, 6 Ω:	1 W	<0.08 % 1 kHz
THD+N, BTL, 6 Ω:	10 W	<0.097 % 1 kHz
THD+N, BTL, 6 Ω:	50 W	<0.08 % 1 kHz
THD+N, BTL, 8 Ω:	1 W	<0.073 % 1 kHz
THD+N, BTL, 8 Ω:	10 W	<0.085 % 1 kHz
THD+N, BTL, 8 Ω:	50 W	<0.068 % 1 kHz
THD+N, PBTL, 2 Ω:	1 W	<0.089 % 1 kHz
THD+N, PBTL, 2 Ω:	10 W	<0.15 % 1 kHz
THD+N, PBTL, 2 Ω:	50 W	<0.13 % 1 kHz
THD+N, PBTL, 2 Ω:	100 W	<0.097 % 1 kHz
THD+N, PBTL, 2 Ω:	150 W	<0.21 % 1 kHz
THD+N, PBTL, 3 Ω:	1 W	<0.093 % 1 kHz
THD+N, PBTL, 3 Ω:	10 W	<0.05 % 1 kHz
THD+N, PBTL, 3 Ω:	50 W	<0.08 % 1 kHz
THD+N, PBTL, 3 Ω:	100 W	<0.062 % 1 kHz
Dynamic Range:	>102 dB	Ref: rated power, A-weighted, AES17 filter, 4 ch avg
Noise Voltage:	<160 μVrms	A-weighted, AES17 filter
Click/Pop, DC step BTL:	14 mV	Mute/unmute, no signal, 6 Ω
Click/Pop, DC step PBTL:	27 mV	Mute/unmute, no signal, 4 Ω
Channel Separation:	>61 dB	1 kHz,
Frequency Response:	0.0 / -0.8 dB	90 W / 4 Ω, unclipped (0 dBFS)

Table 8. Audio Performance Subwoofer Line Output

Audio Performance	Notes/Conditions	
Full-scale output voltage swing, 0 dBFS:	2 VRMS	100 Hz, 10-kΩ load
Full-scale output voltage swing, 10% THD+N:	2.32 VRMS	100 Hz, 10-kΩ load
THD+N, 10 kΩ:	1 V	<0.017% 100 Hz
THD+N, 10 kΩ:	100 mV	<0.013% 100 Hz
Frequency response:	+1, -3 dB	20 Hz-1.7 kHz
Dynamic range:	>105.5 dB	20 Hz-1.7 kHz
Noise voltage:	<11 μV	20 Hz-1.7 kHz

Table 9. Thermal Specification

Thermal Specification**	T _{HEATSINK} *	Notes/Conditions
Idle, all channels switching	32°C	1 kHz, 15 min, -60 dBFS signal, T _A = 25°C
4x12.5 W, 4 Ω + 1x25 W, 2 Ω (1/8 power)	58°C	1 kHz, 1 hour, T _A = 25°C
2x100 W, 4 Ω	78°C	1 kHz, 5 min, T _A = 25°C

**Measured on surface of heatsink

Table 10. Physical Specifications

Physical Specifications	Notes/Conditions
PCB dimensions:	124 × 150 × 54 Width × Length × Height (mm)
Total weight:	370 gr Components + PCB + Heatsink + Mechanics

Note: All electrical and audio specifications are typical values.

4.1 THD+N vs Power (BTL –4 Ω)

Gain: +2.5 dB set in TAS5508B

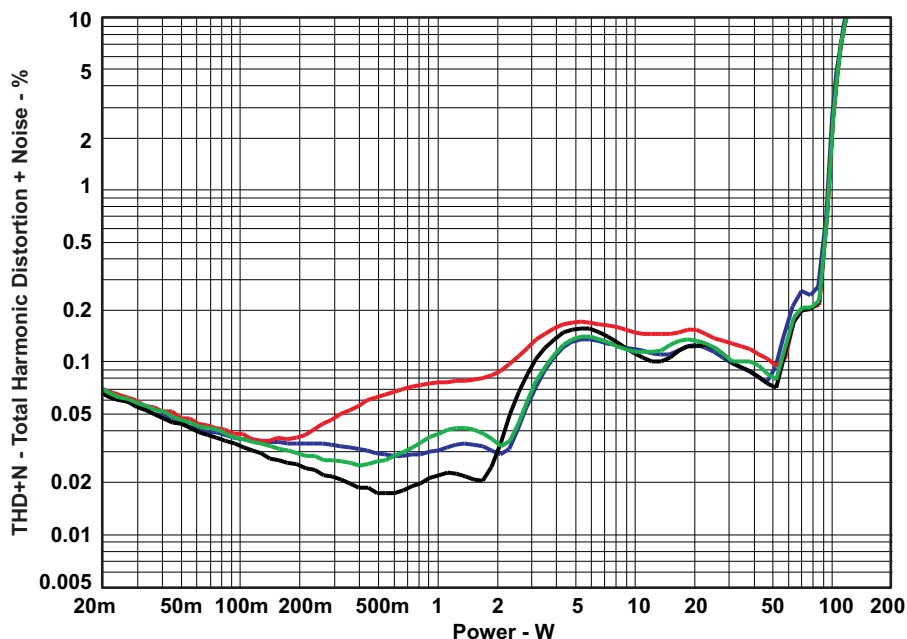


Figure 4. THD+N vs Power (BTL – 4 Ω)

4.2 THD+N vs Power (BTL –6 Ω)

Gain: +2.5 dB set in TAS5508B

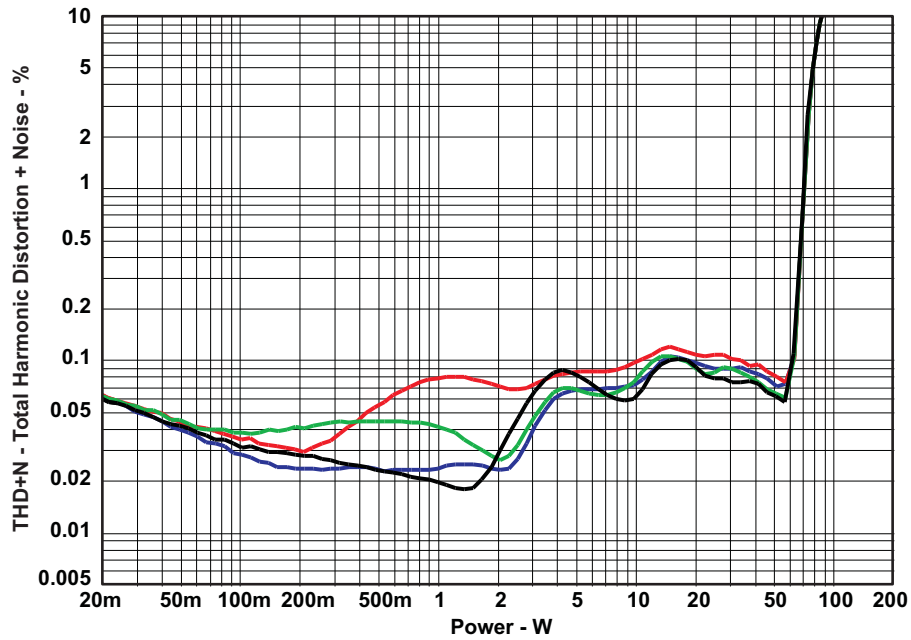


Figure 5. THD+N vs Power (BTL –6 Ω)

4.3 THD+N vs Power (BTL –8 Ω)

Gain: +2.5 dB set in TAS5508B

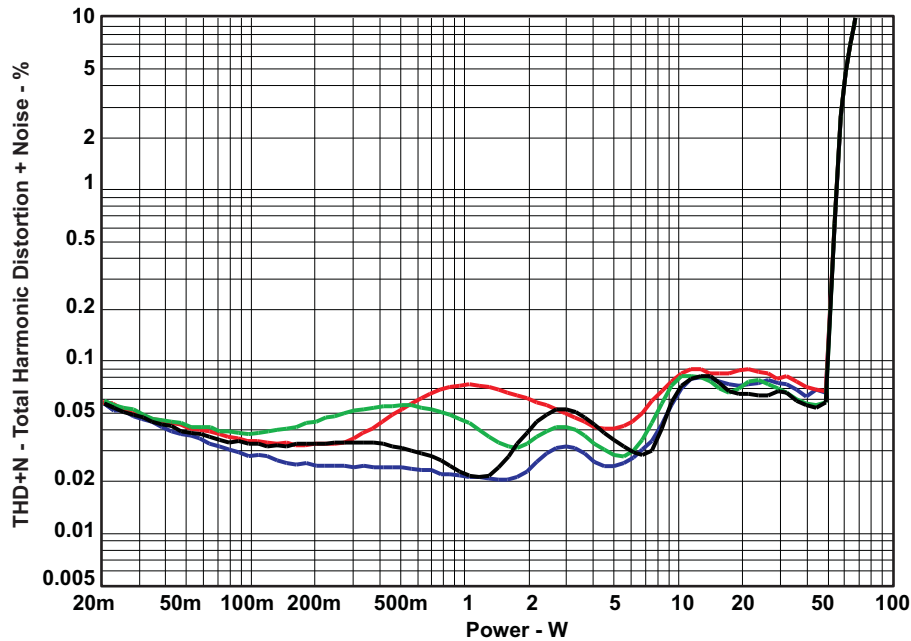


Figure 6. THD+N vs Power (BTL –8 Ω)

4.4 THD+N vs Power (PBTL -2 Ω)

Gain: +2.5 dB set in TAS5508B

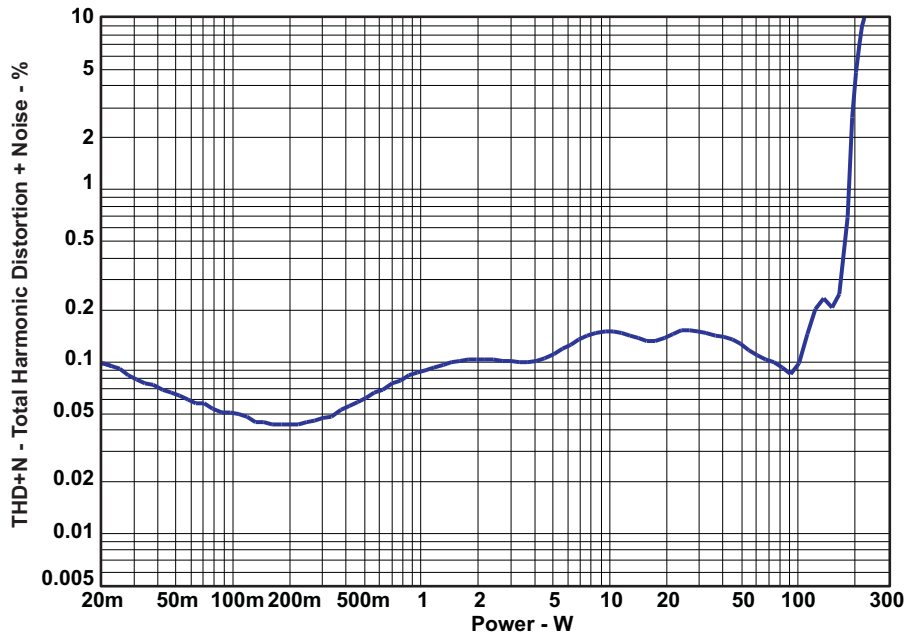


Figure 7. THD+N vs Power (PBTL -2 Ω)

4.5 THD+N vs Power (PBTL -3 Ω)

Gain: +2.5 dB set in TAS5508B

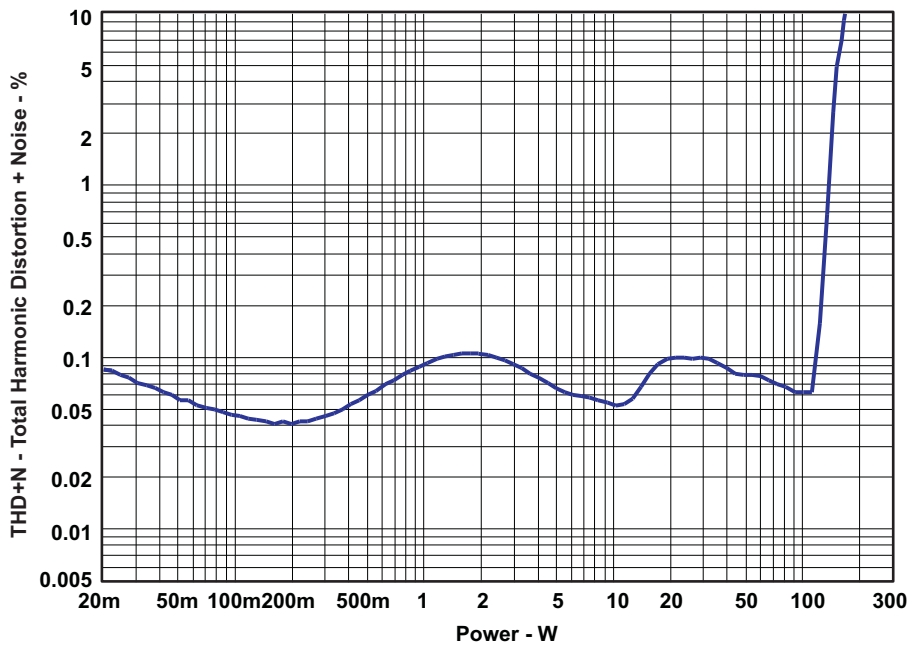


Figure 8. THD+N vs Power (PBTL -3 Ω)

4.6 THD+N vs Frequency (BTL -4 Ω)

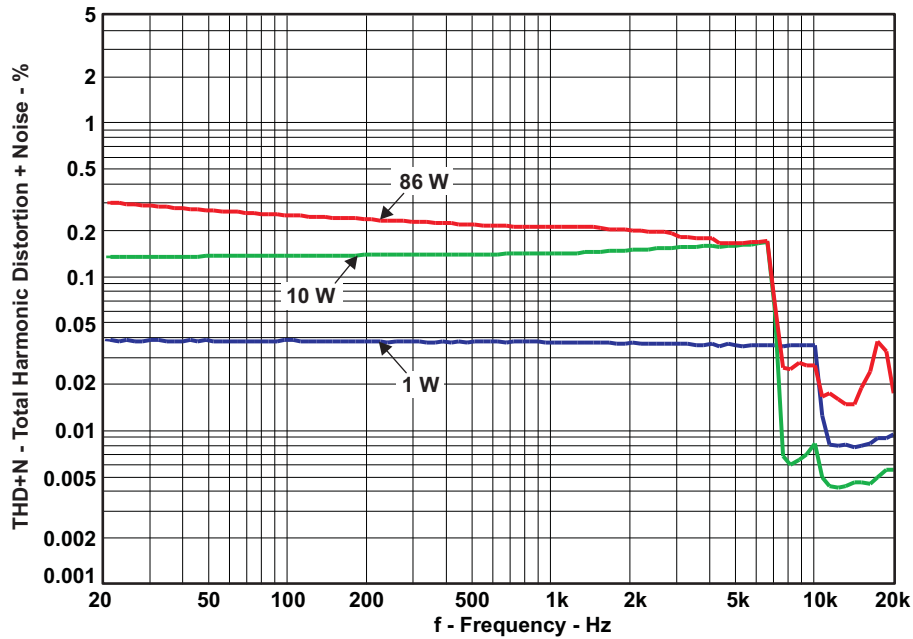


Figure 9. THD+N vs Frequency (BTL -4 Ω)

4.7 THD+N vs Frequency (BTL - 6 Ω)

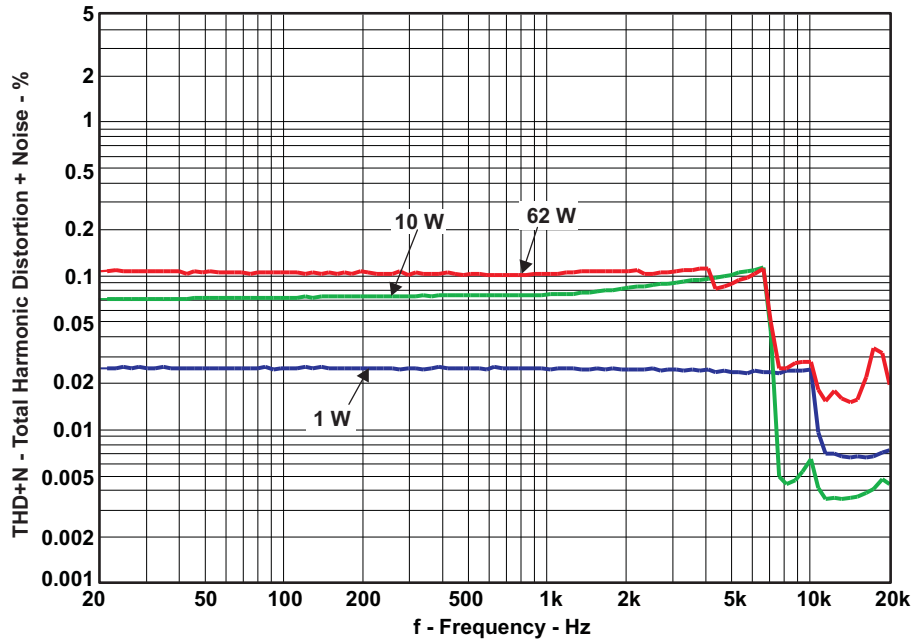


Figure 10. THD+N vs Frequency (BTL - 6 Ω)

4.8 THD+N vs Frequency (BTL -8 Ω)

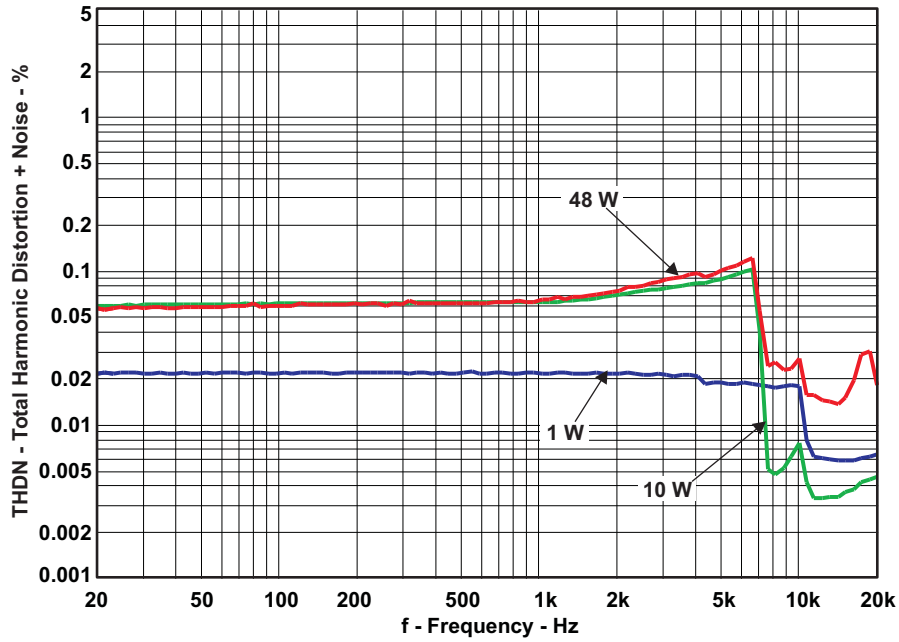


Figure 11. THD+N vs Frequency (BTL -8 Ω)

4.9 THD+N vs Frequency (PBTL -2 Ω)

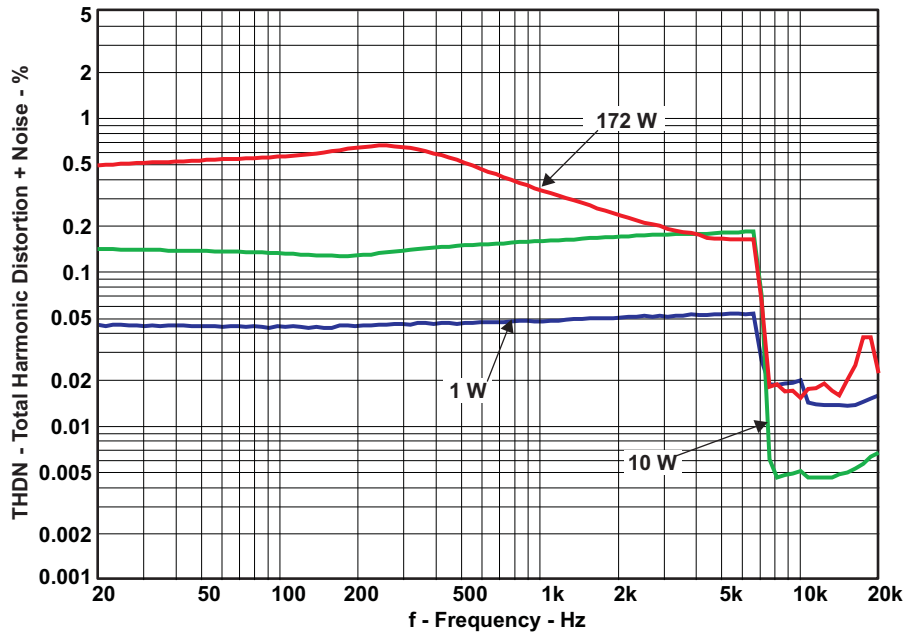


Figure 12. THD+N vs Frequency (PBTL -2 Ω)

4.10 THD+N vs Frequency (PBTL -3 Ω)

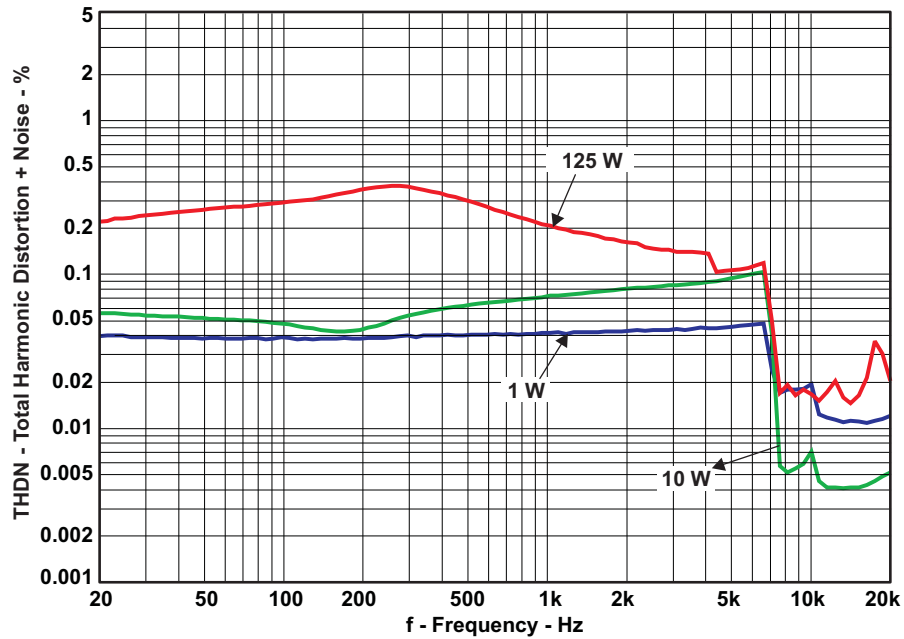


Figure 13. THD+N vs Frequency (PBTL -3 Ω)

4.11 FFT Spectrum with -60-dBFS Tone (BTL)

Reference voltage is 19.09 V. FFT size 16k.

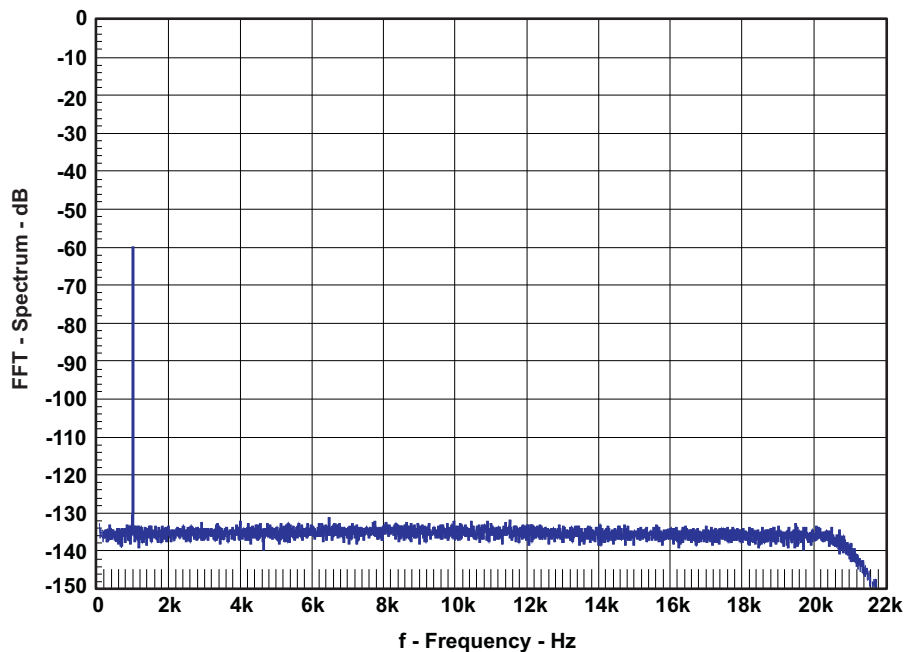


Figure 14. FFT Spectrum with -60-dBFS Tone (BTL)

4.12 FFT Spectrum With -60-dBFS Tone (PBTl)

Reference voltage is 18.7 V. FFT size 16k.

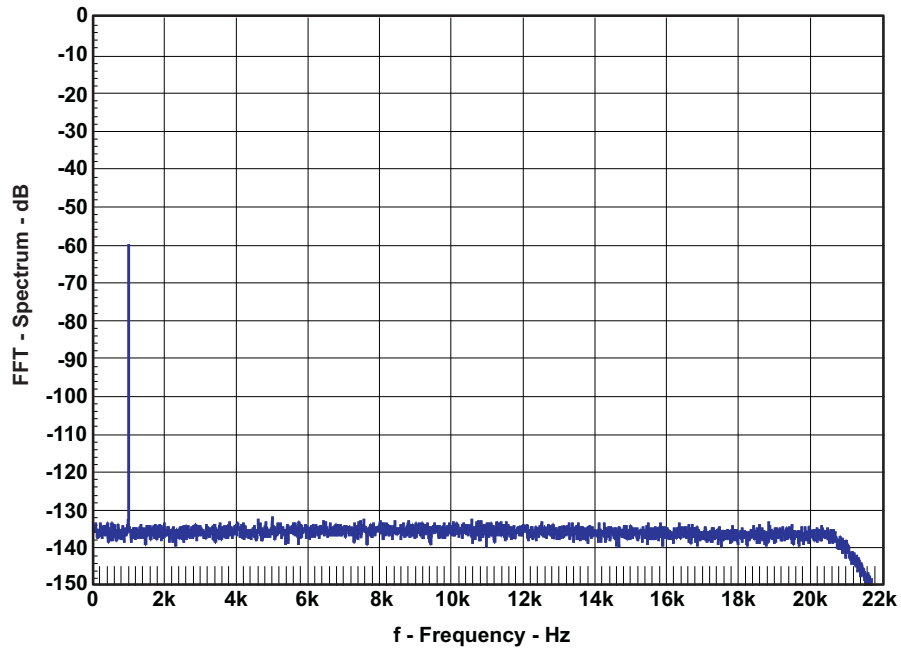


Figure 15. FFT Spectrum with -60-dBFS Tone (PBTl)

4.13 Idle Noise FFT Spectrum (BTL)

Automute disabled – Register x04h set to x60h. Reference voltage is 19.02 V. FFT size 16k.

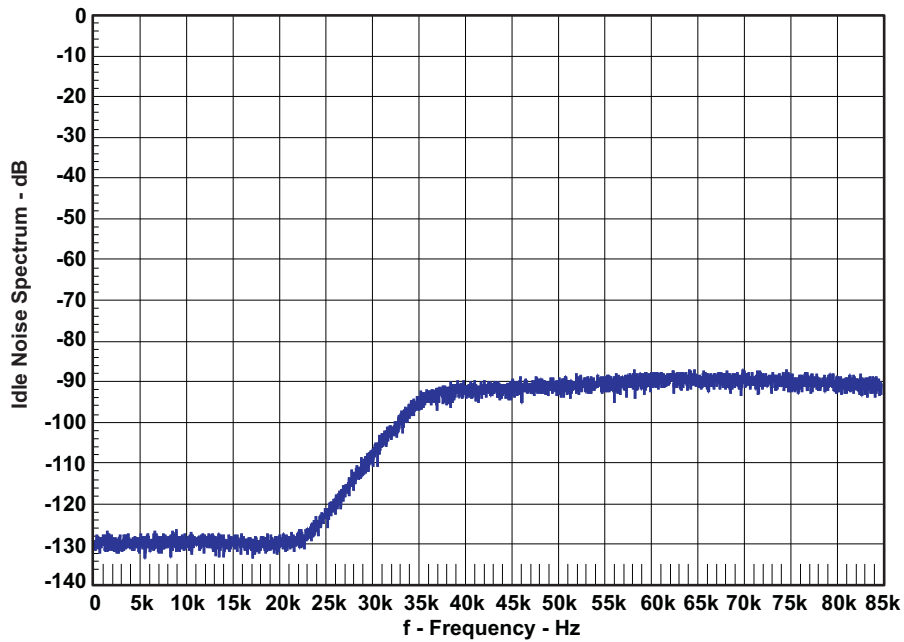


Figure 16. Idle Noise FFT Spectrum (BTL)

4.14 Idle Noise FFT Spectrum (PBTL)

Automute disabled – Register x04h set to x60h. Reference voltage is 18.75 V. FFT size 16k.

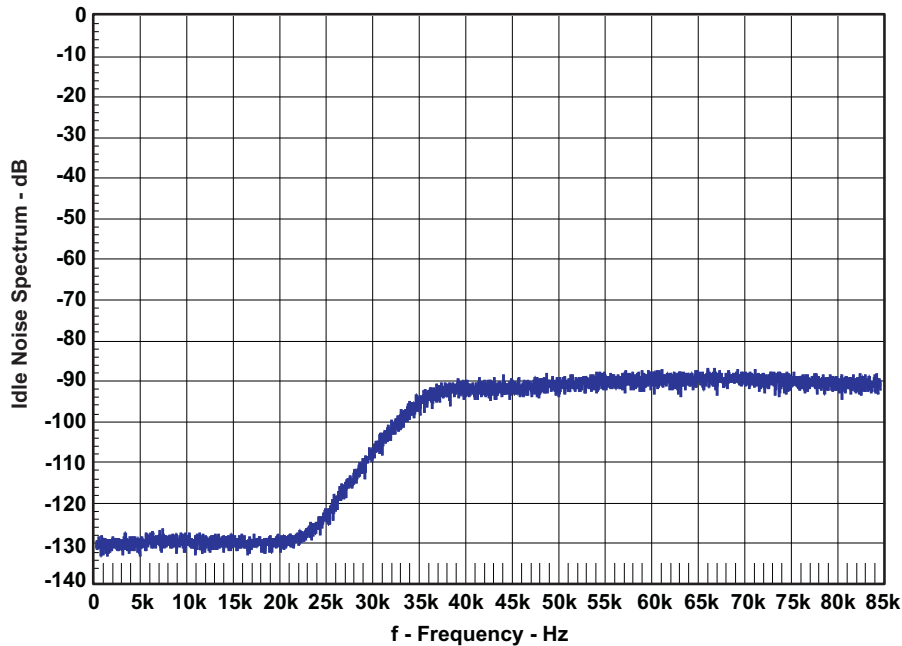


Figure 17. Idle Noise FFT Spectrum (PBTL)

4.15 Channel Separation

Channel separation is tested for two channels in different package, channel 1 and channel 2. 4-Ω loads are used for both channels. Channel 1 input signal is 0 dBFS, channel 2 muted. Reference voltage 19 V_{rms}

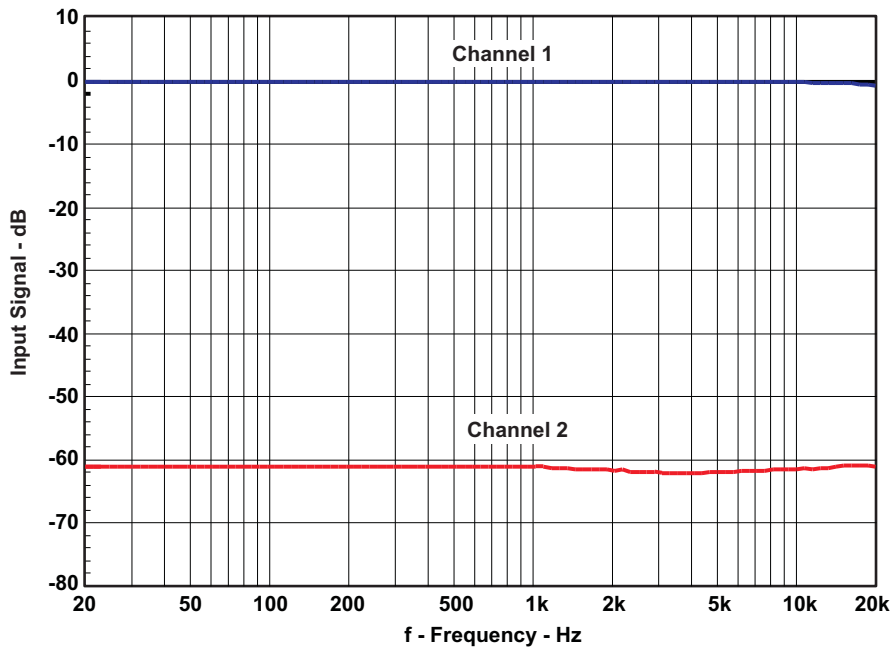


Figure 18. Channel Separation

4.16 Frequency Response (BTL)

Measurement bandwidth filter 80 kHz.

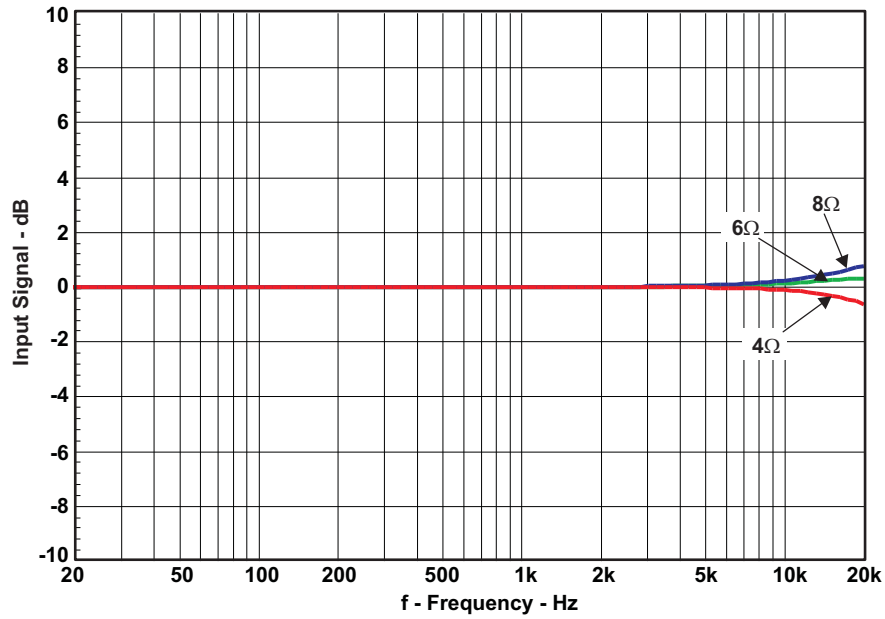


Figure 19. Frequency Response (BTL)

4.17 Frequency Response (PBTL)

Measurement bandwidth filter 80 kHz.

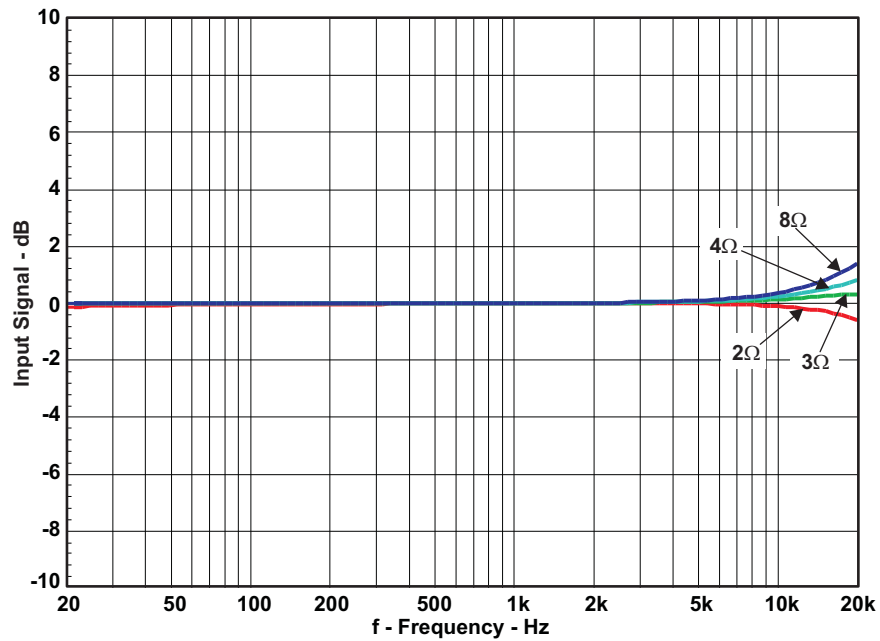


Figure 20. Frequency Response (PBTL)

4.18 High-Current Protection (BTL)

Input 1-kHz bursted signal, load 1 Ω

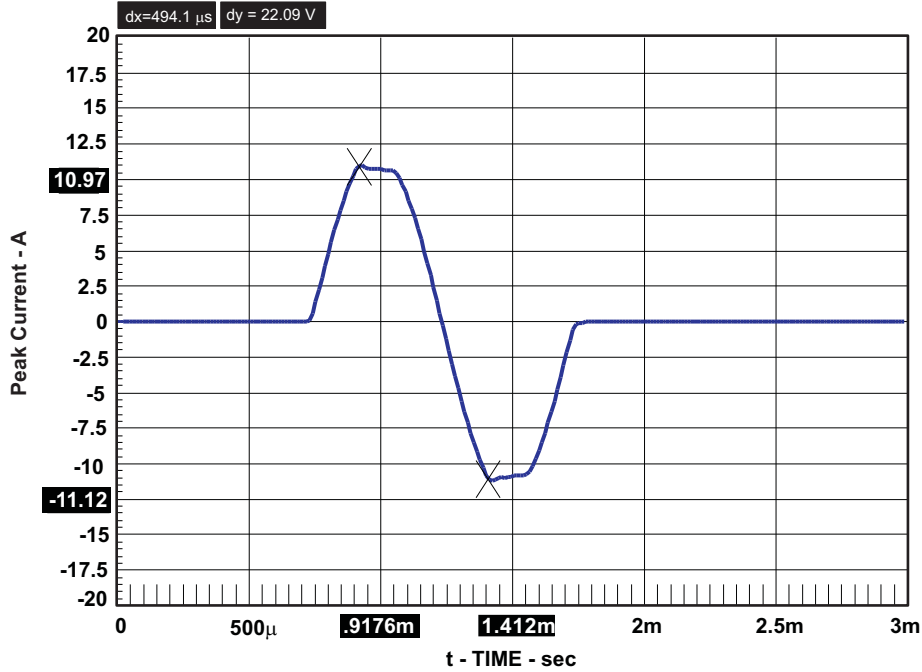


Figure 21. High-Current Protection (BTL)

4.19 High-Current Protection (PBTL)

Input 1-kHz bursted signal, load 1 Ω .

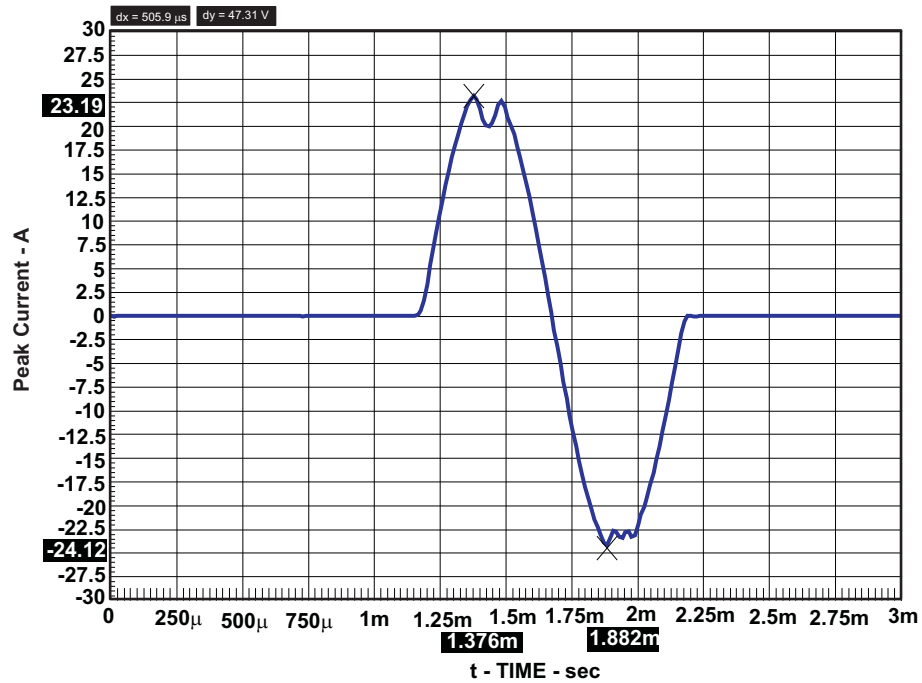


Figure 22. High-Current Protection (PBTL)

4.20 Pop/Click (BTL)

No input signal applied. The measurement results are presented in time domain.

Test with automute disabled – Register x04h set to x60h. No input signal applied. Load 4 Ω.

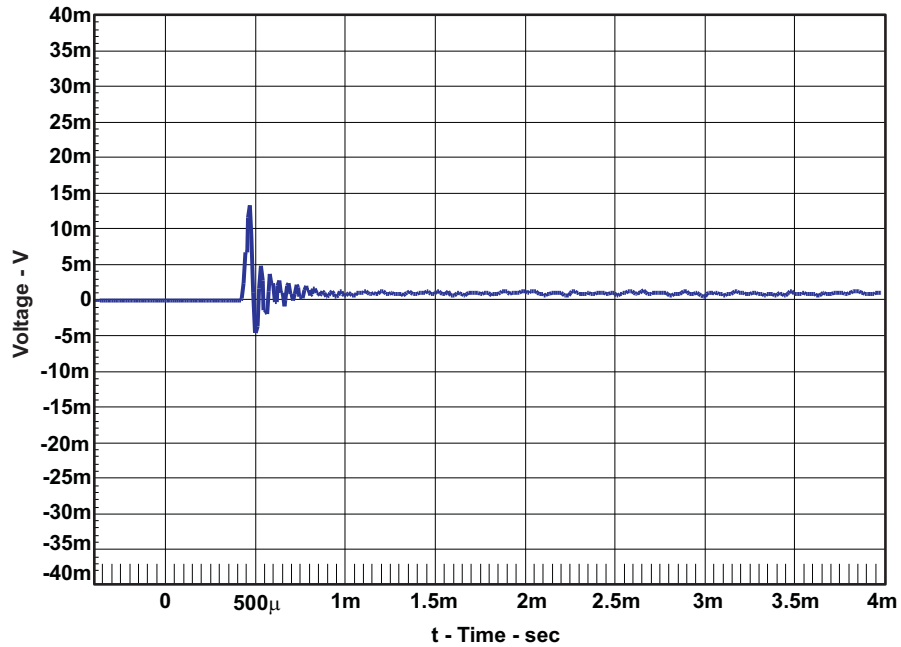


Figure 23. Pop/Click (BTL)

4.21 Pop/Click (PBTL)

No input signal applied. The measurement results are presented in time domain.

Test with automute disabled – Register x04h set to x60h. No input signal applied. Load 2 Ω.

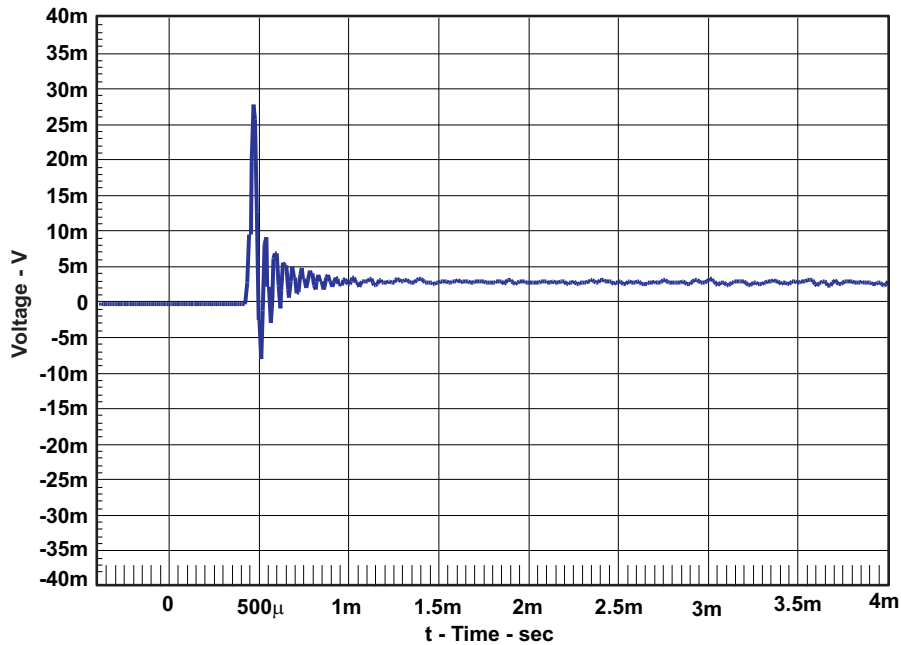


Figure 24. Pop/Click (PBTL)

4.22 Output Stage Efficiency

Efficiency is tested with two channels carrying an 8-Ω load. The board has been preheated for 1 hour at 1/8 output power.

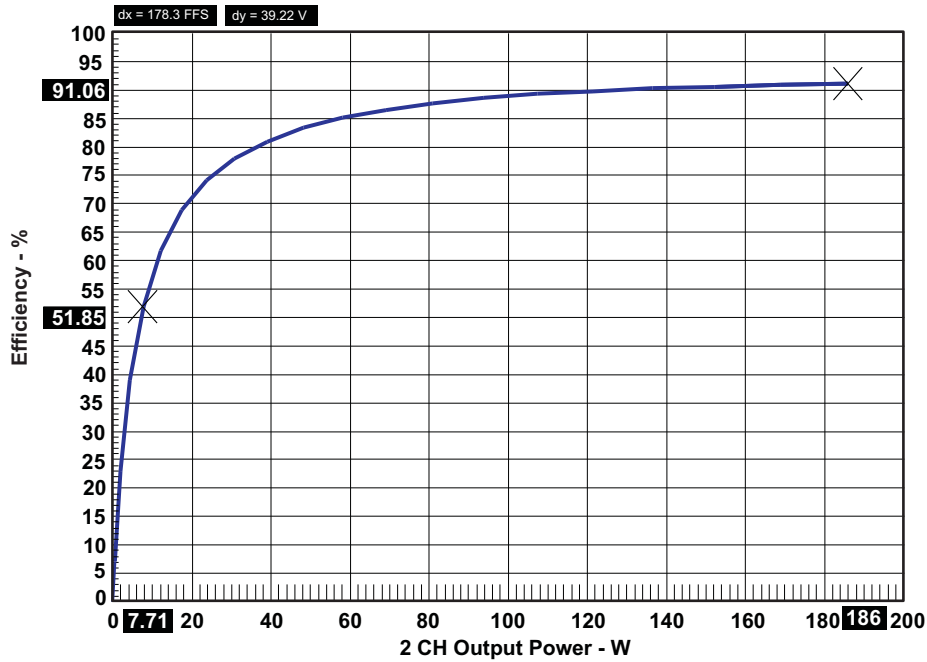


Figure 25. Output Stage Efficiency

4.23 Subwoofer Lineout THD vs Output Voltage

Gain: +2.5 dB set in TAS5508B. 100-Hz input

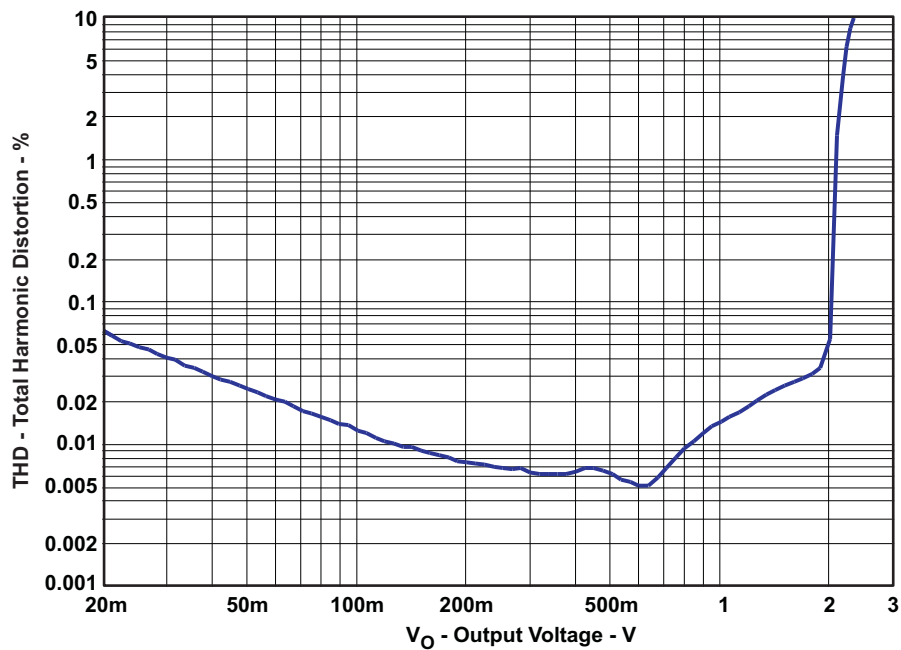


Figure 26. Subwoofer Lineout THD vs Output Voltage

4.24 Subwoofer Lineout THD vs Frequency

Load 10 kΩ

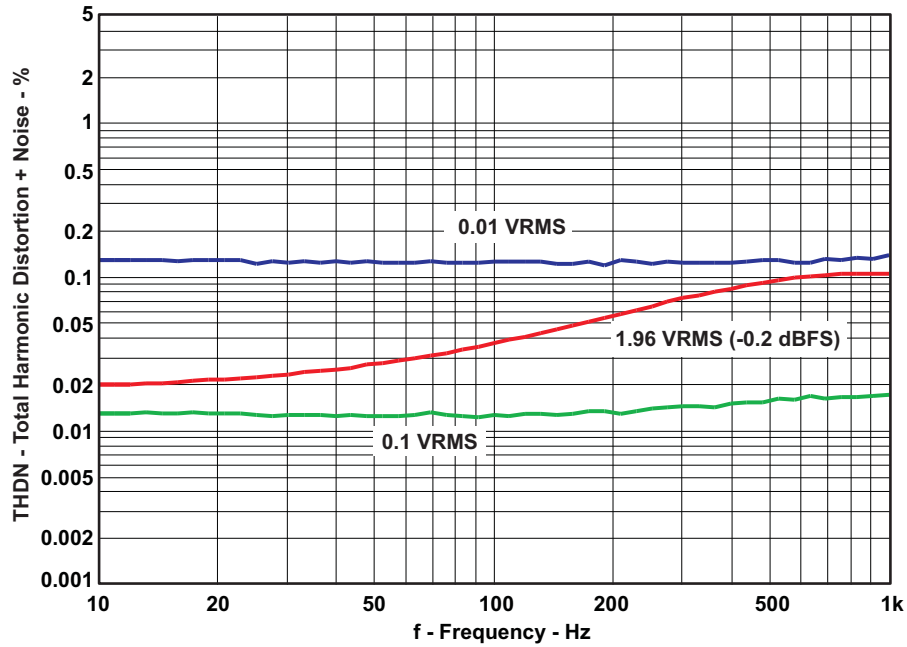


Figure 27. Subwoofer Lineout THD vs Frequency

4.25 Subwoofer Lineout Frequency Response

Measurement bandwidth filter 80 kHz. Load 10 kΩ.

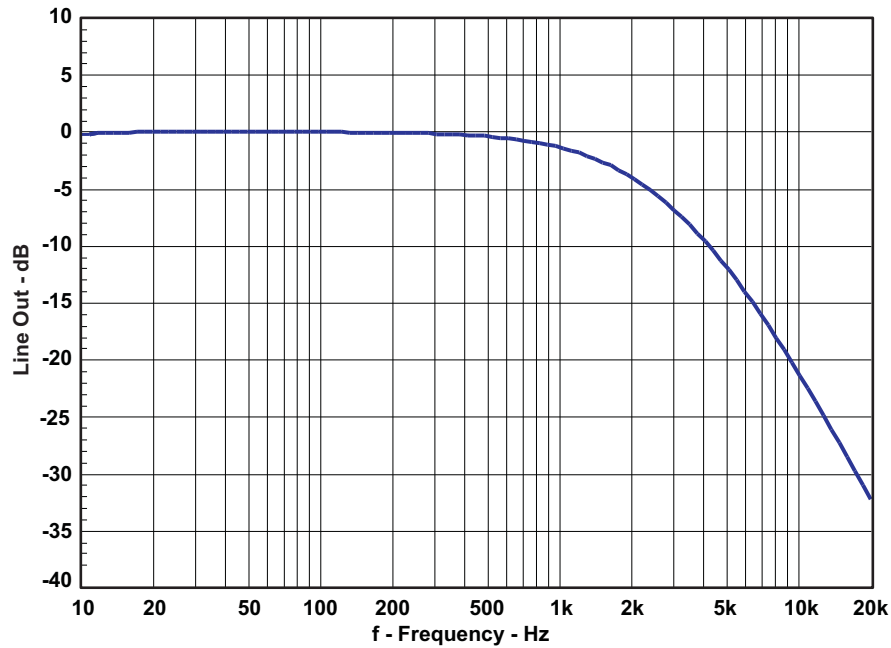


Figure 28. Subwoofer Lineout Frequency Response

5 Related Documentation from Texas Instruments

Table 11 contains a list of data manuals that have detailed descriptions of the integrated circuits used in the design of the TAS5342DDV6EVM. The data manuals can be obtained at the URL <http://www.ti.com>.

Table 11. Related Documentation from Texas Instruments

Part Number	Literature Number
TAS5508B	SLES162
TAS5342	SLAS557
DRV600	SLOS536
TLV271	SLOS351
TPS3825-33	SLVS165
TLV1117-33C	SLVS561

5.1 Additional Documentation

1. *PC Configuration Tool for TAS5508* (TAS5508 GUI ver. 4.0 or later)
2. *System Design Considerations for True Digital Audio Power Amplifiers* application report ([SLAA117](#))
3. *Digital Audio Measurements* application report ([SLAA114](#))
4. *PSRR for PurePath Digital™ Audio Amplifiers* application report ([SLEA049](#))
5. *Power Rating in Audio Amplifiers* application report ([SLEA047](#))
6. *PurePath Digital™ AM Interference Avoidance* application report ([SLEA040](#))
7. *Click and Pop Measurements Technique* application report ([SLEA044](#))
8. *Power Supply Recommendations for DVD-Receivers* application report ([SLEA027](#))
9. *Implementation of Power Supply Volume Control* application report ([SLEA038](#))

Appendix A Design Documents

This appendix comprises design documents pertaining to the TAS5162DDV6EVM evaluation module. The documents are presented in the following order.

- Schematic (8 pages)
- Parts List (2 pages)
- PCB Specification (1 page)
- PCB Layers (4 pages)
- Heat-Sink Drawing (1 page)



Design Name: **TAS5342DDV6EVM**
 Type: Mass Market Evaluation Module
 File Name: A820-SCH-001.DSN
 Version: 2.00
 Date: 5.Nov 2007
 Design Engineer: Jonas Holm (jlh@ti.com)
 Audio Configuration: 5.1 PurePath Digital Amplifier Design
 1 x TAS5508b, 3 x TAS5342DDV

Interfaces: J10: 26 pin IDC Header for Control, I2C, +5V, +12V and for I2S Audio
 J101-J104, J107, J108, J117: 2 pin 3.96mm Headers for Speakers
 J600: RCA Jack for Subwoofer Line Out
 J901: 4 pin 3.96mm Header for H-Bridge Supply
 J902: 5 pin 2.54 mm Header for PSVC Interface

Setup: 4 Ohm (BTL) and 2 Ohm (PBTL) Speaker Loads
 +31.5 V H-Bridge Supply Voltage

Performance: 80 W / 4 Ohm (BTL) unclipped, or 100 W / 4 Ohm (BTL) 10% THD+N
 102 dB Dynamic Range

Page

- 1/8: Front Page and Schematic Disclaimer
- 2/8: Overview - Modulator, Input/Output and Line Output Connectors
- 3/8: 2 Channel BTL Power Stage
- 4/8: 2 Channel BTL Power Stage
- 5/8: 1 Channel PBTL Power Stage
- 6/8: Subwoofer Line Out
- 7/8: Power Supplies & EEPROM
- 8/8: Mechanics

Copyright 2007 Texas Instruments, Inc - All rights reserved - The TI and PurePath Digital logos are trademarks of Texas Instruments.

NOTE1




SCHEMATIC DISCLAIMER

The preliminary schematic information and materials ("Materials") provided here are provided by Texas Instruments Incorporated ("TI") as a service to its customers and/or suppliers, and may be used for informational purposes only, and only subject to the following terms. By downloading or viewing these Materials, you are signifying your assent to these terms.



- 1.) These preliminary evaluation schematics are intended for use for PRELIMINARY ENGINEERING DEVELOPMENT AND EVALUATION PURPOSES ONLY and are not considered by Texas Instruments to be fit as a basis for establishing production products or systems. This information may be incomplete in several respects, including but not limited to information relating to required design, marketing, and/or manufacturing-related protective considerations and product safety measures typically found in the end-product incorporating the goods.
- 2.) Accordingly, neither TI nor its suppliers warrant the accuracy or completeness of the information, text, graphics, links or other items contained within the Materials. TI may make changes to the Materials, or to the products described therein, at any time without notice. TI makes no commitment to update the Materials.
- 3.) TI assumes no liability for applications assistance, customer product design, software performance, or services that may be described or referenced in the Materials. The user assumes all responsibility and liability for proper and safe design and handling of goods. Accordingly, the user indemnifies TI from all claims arising from its use of the Materials.
- 4.) TI currently deals with various customers for products, and therefore our arrangement with the user will not be exclusive. TI makes no representations regarding the commercial availability of non-TI components that may be referenced in the Materials.
- 5.) No license is granted under any patent right or other intellectual property right of TI covering or relating to any combination, machine, or process in which such TI products or services might be or are used. Except as expressly provided herein, TI and its suppliers do not grant any express or implied right to you under any patents, copyrights, trademarks, or trade secret information.
- 6.) Performance tests and ratings, to the extent referenced in the Materials, are measured using specific computer systems and/or components and reflect the approximate performance of TI products as measured by those tests. Any difference in system hardware or software design or configuration may affect actual performance. Buyers should consult other sources of information to evaluate the performance of systems or components they are considering purchasing.
- 7.) Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service in official TI data books or data sheets voids all express and any implied warranties for the associated TI product or service, and is an unfair and deceptive business practice, and TI is not responsible for any such use.
- 8.) The Materials are copyrighted and any unauthorized use may violate copyright, trademark, and other laws. You may only download one copy for your internal use only, unless you are specifically licensed to do otherwise by TI in writing. This is a license, not a transfer of title, and is subject to the following restrictions: You may not: (a) modify the Materials (including any associated warranties, conditions, limitations or notices) or use them for any commercial purpose, or any public display, performance, sale or rental; (b) decompile, reverse engineer, or disassemble software Materials except and only to the extent permitted by applicable law; (c) remove any copyright or other proprietary notices from the Materials; (d) transfer the Materials to another person. You agree to prevent any unauthorized copying of the Materials. TI may terminate this license at any time if you are in breach of the terms of this Agreement. Upon termination, you will immediately destroy the Materials.
- 9.) THE MATERIALS ARE PROVIDED "AS IS" WITHOUT ANY EXPRESS OR IMPLIED WARRANTY OF ANY KIND INCLUDING WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT OF INTELLECTUAL PROPERTY, OR FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT SHALL TI OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, LOSS OF INFORMATION) ARISING OUT OF THE USE OF OR INABILITY TO USE THE MATERIALS, EVEN IF TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Schematic Disclaimer Preliminary



TAS5342DDV6EVM

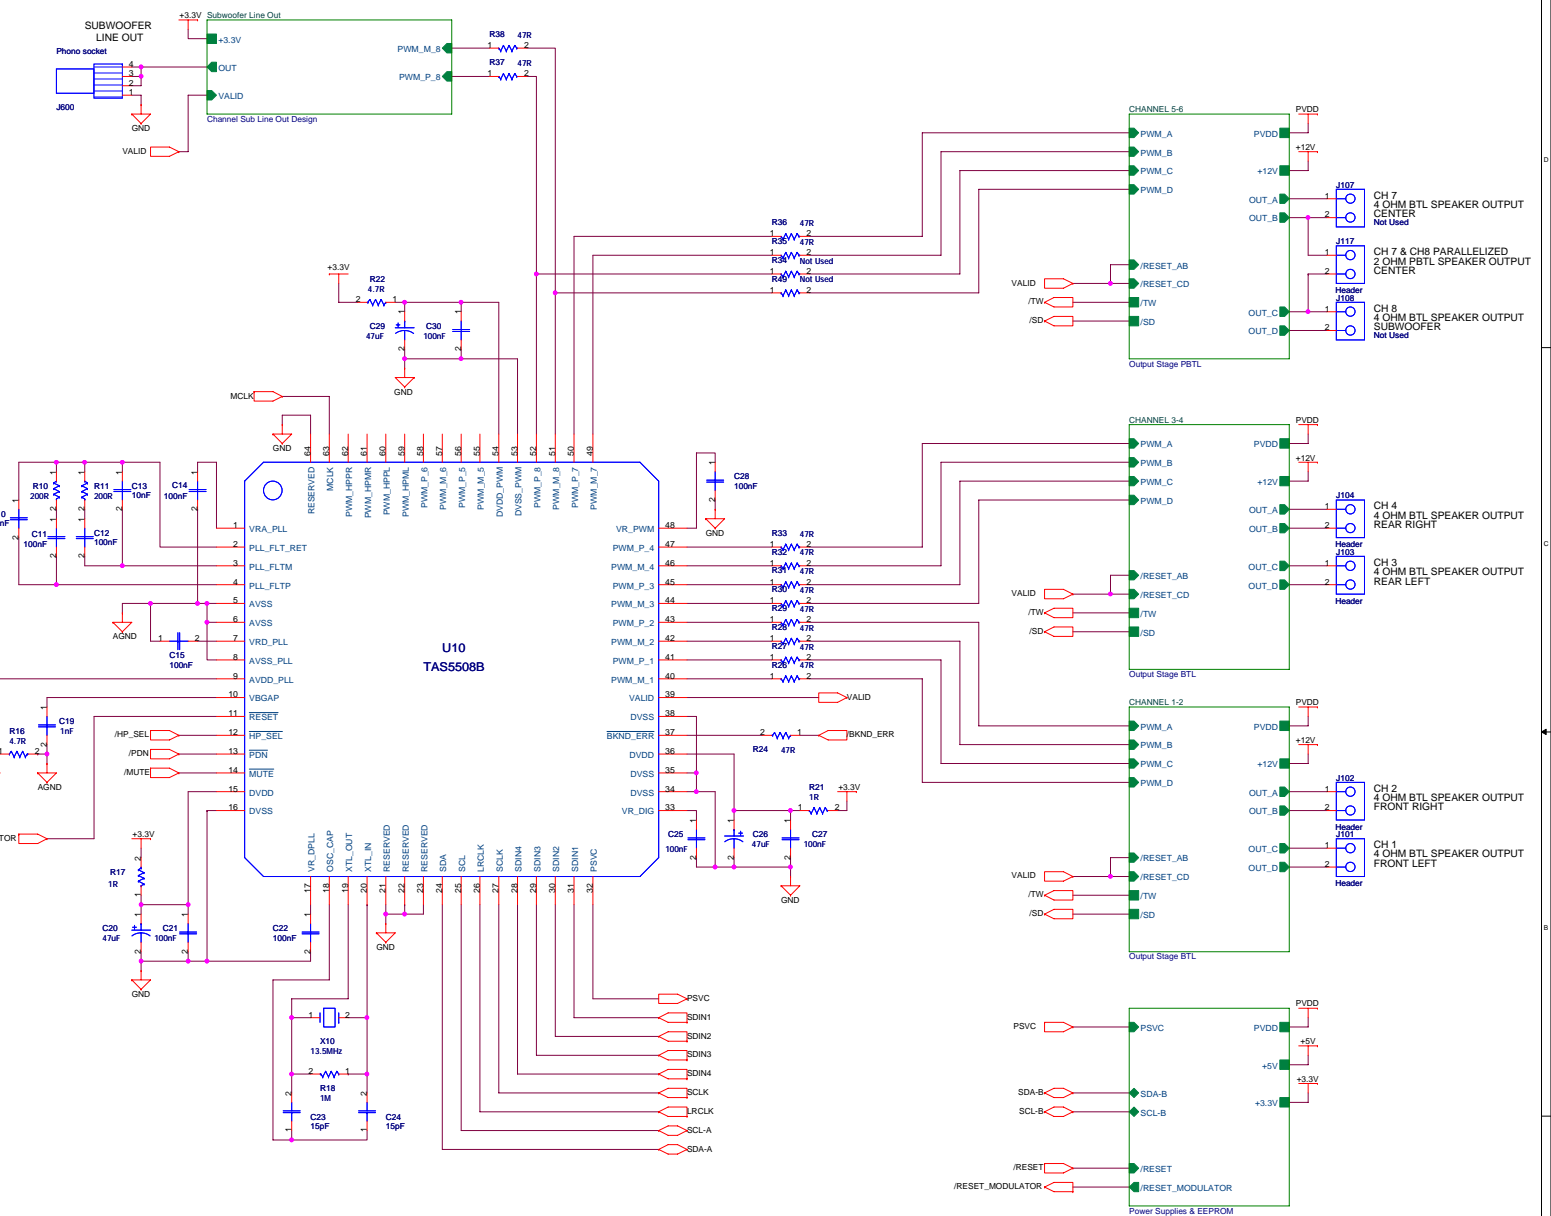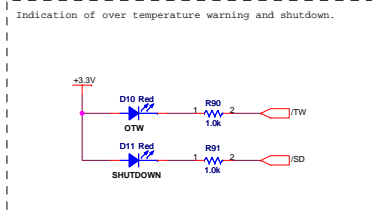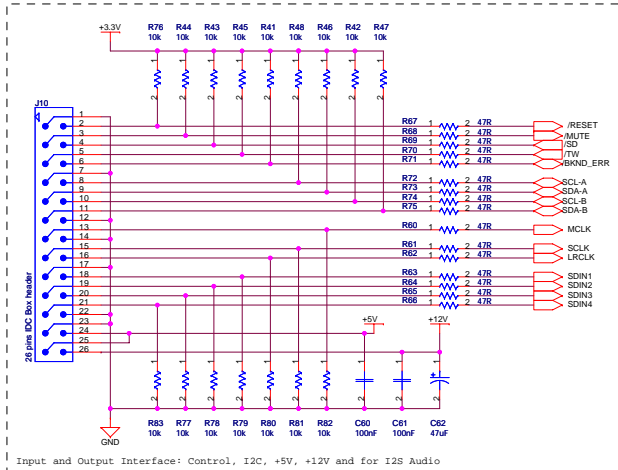

POWER OUTPUT STAGE (BTL)

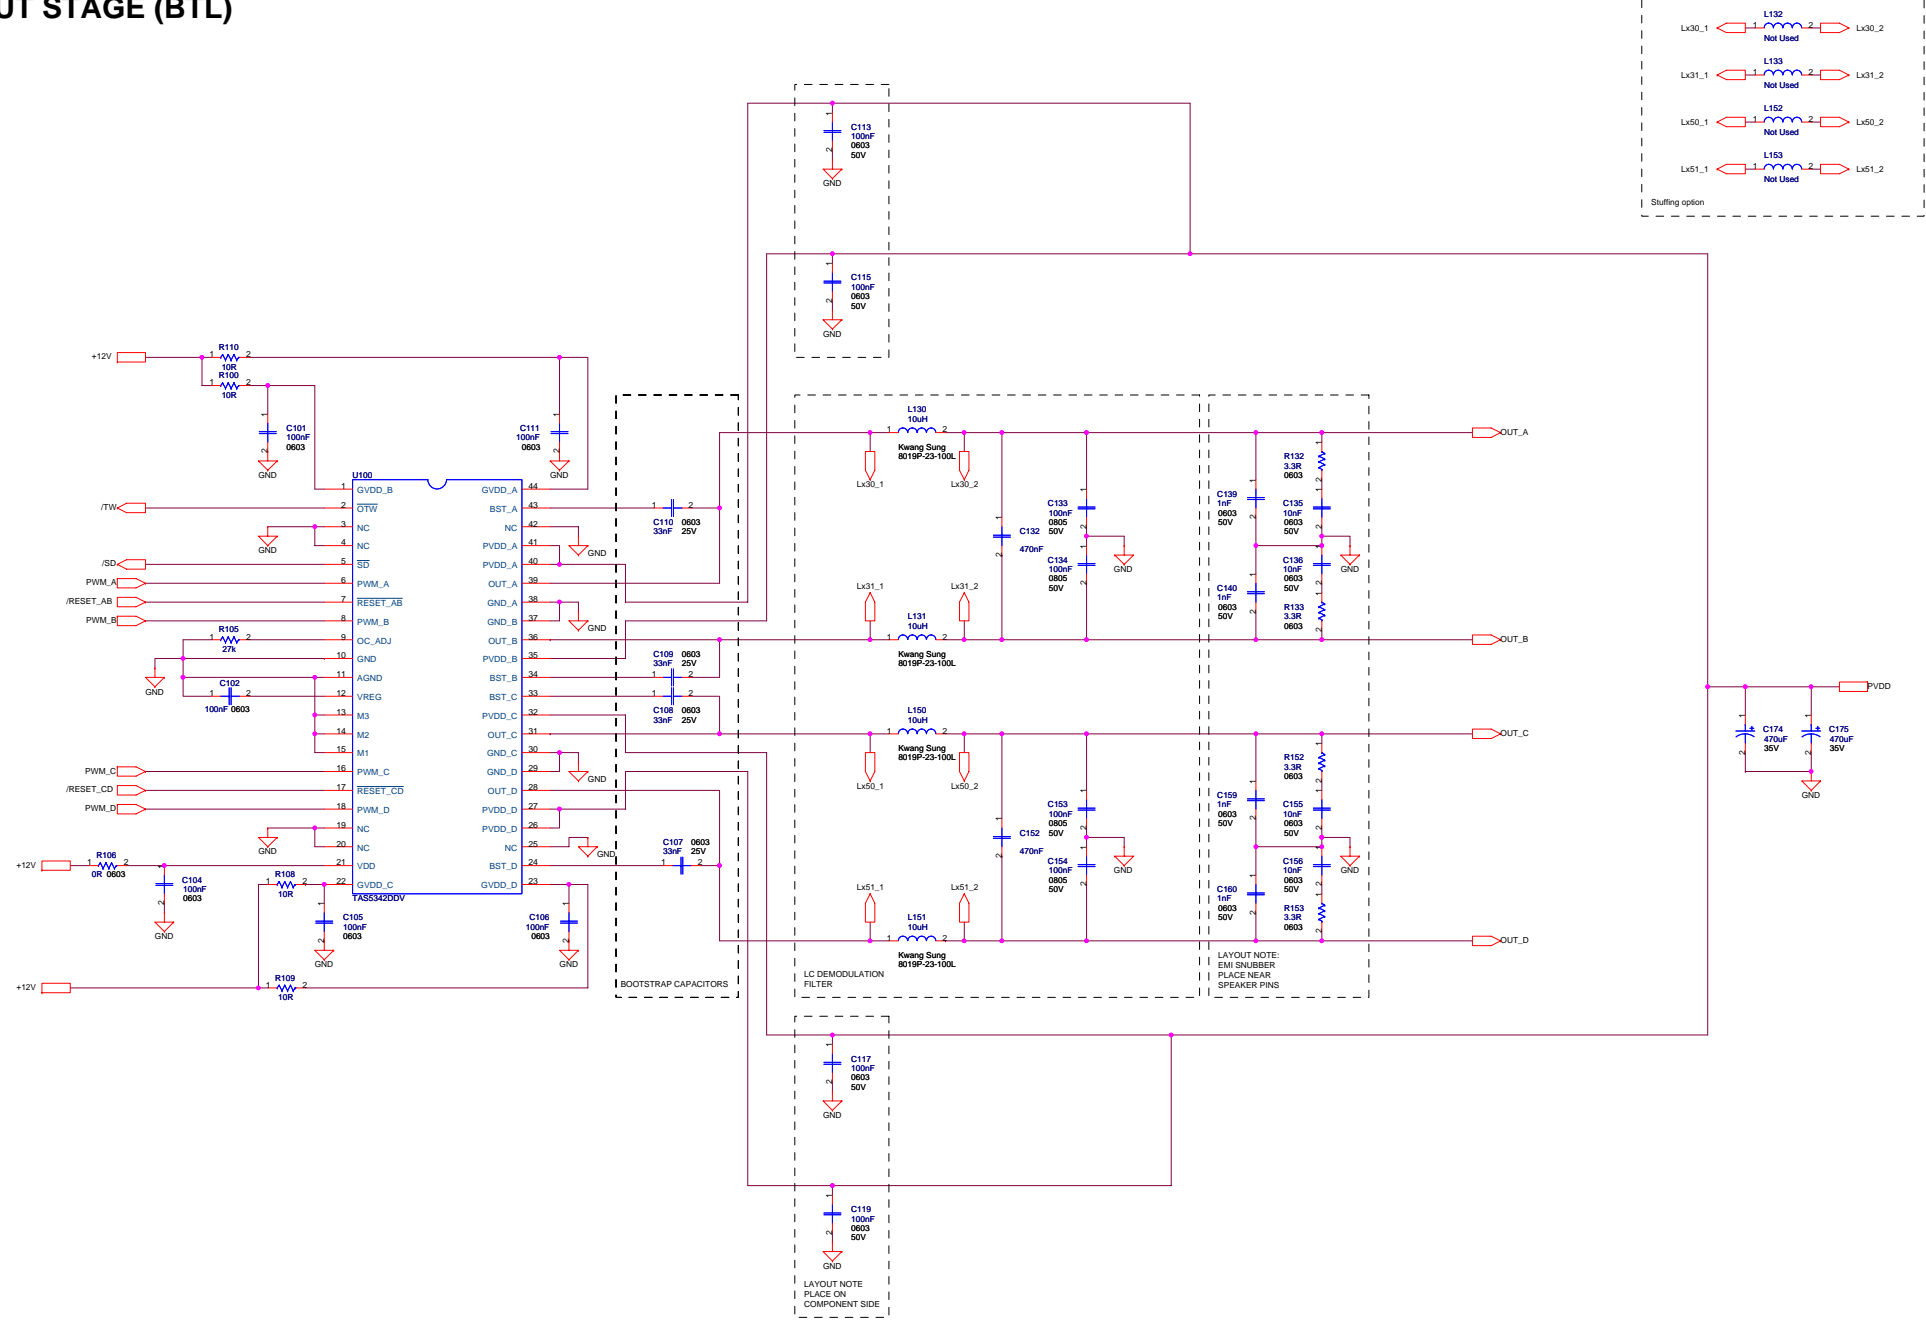

POWER OUTPUT STAGE (BTL)

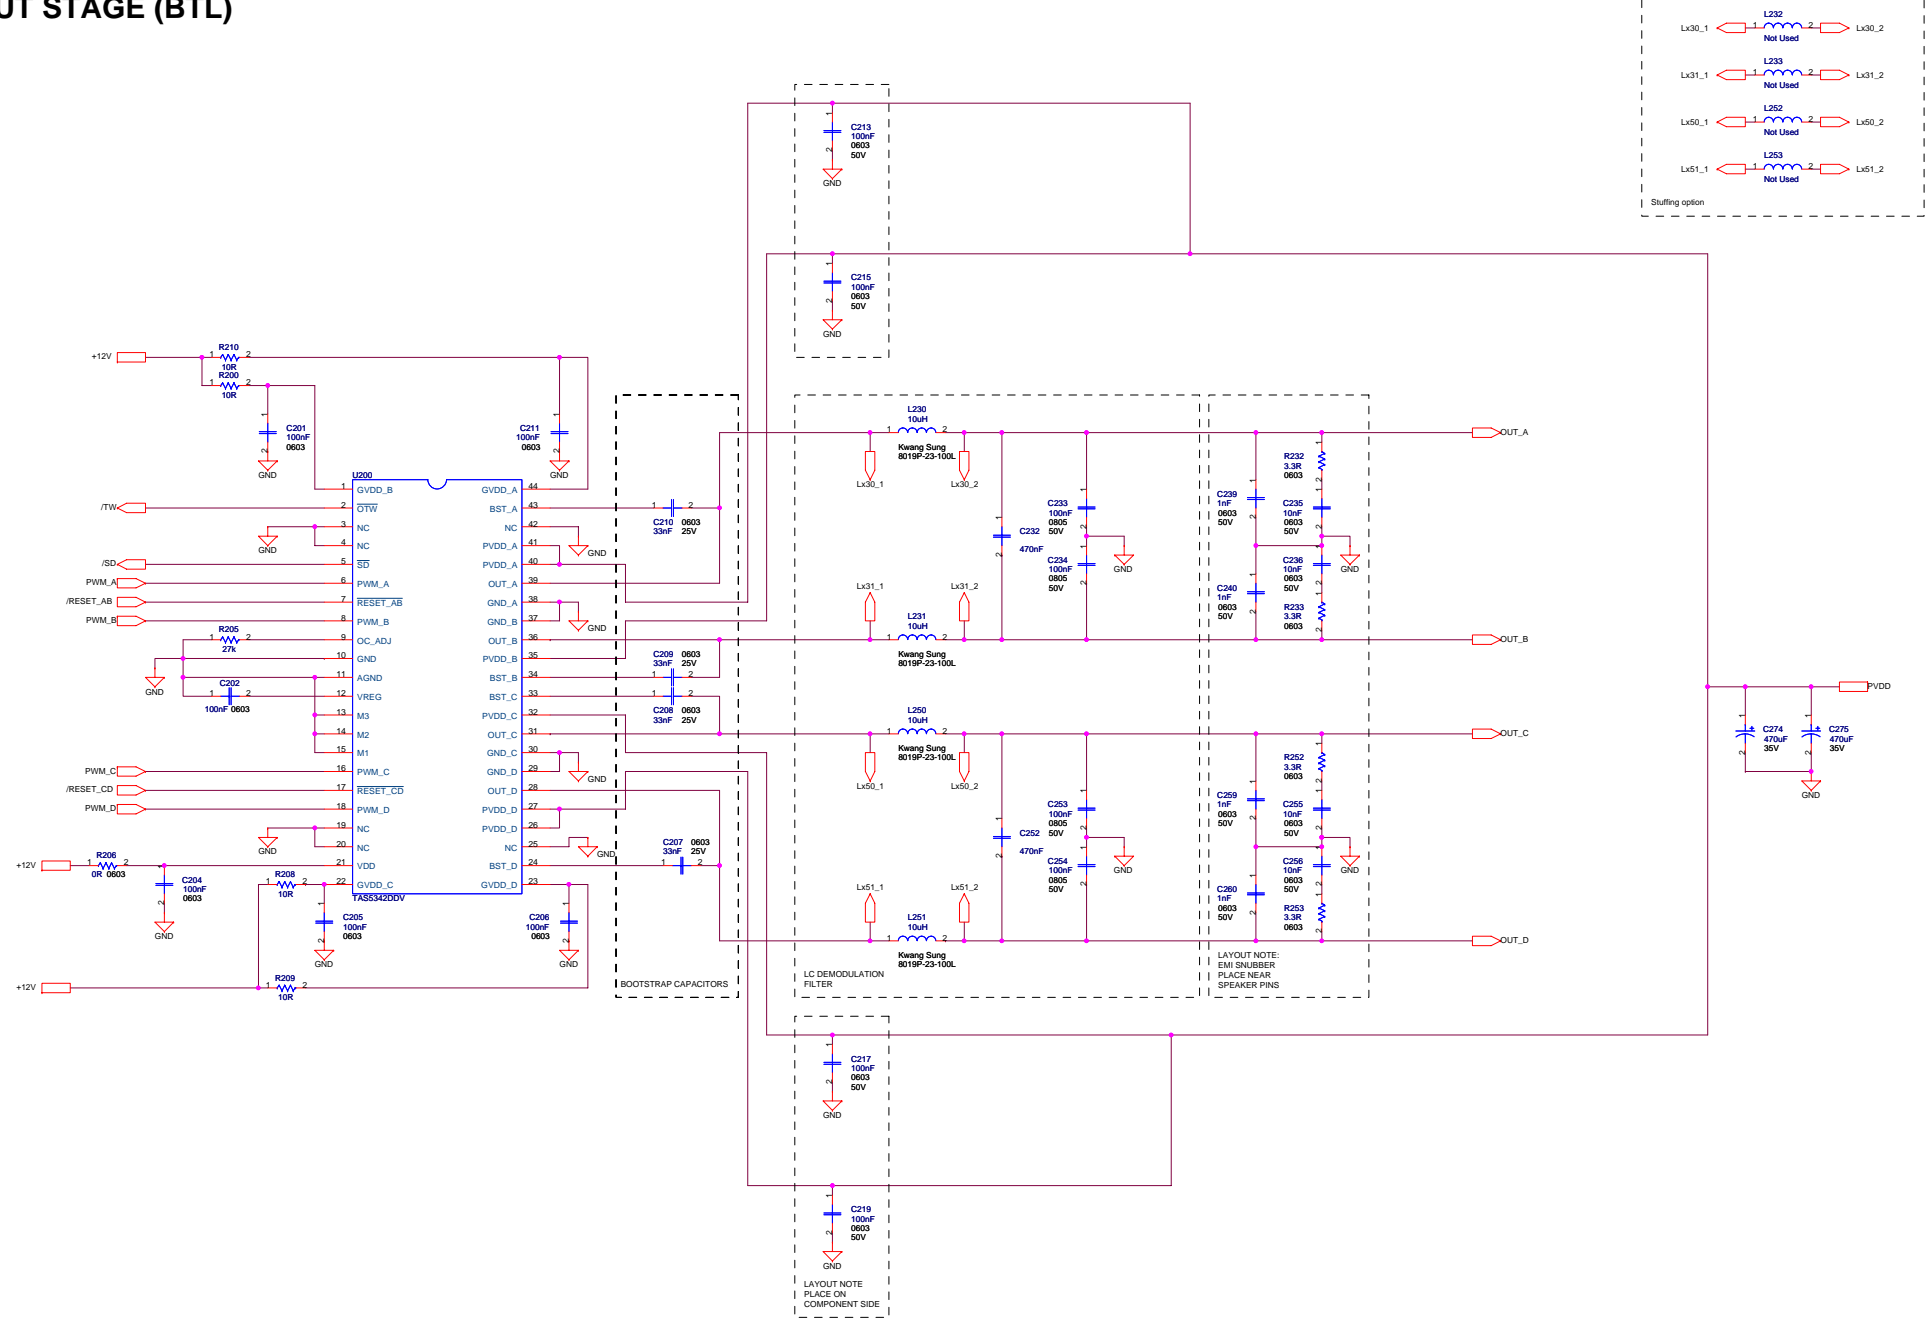



BOOTSTRAP CAPACITORS

LC DEMODULATION FILTER

LAYOUT NOTE:
EMI SNUBBER
PLACE NEAR
SPEAKER PINS

LAYOUT NOTE
PLACE ON
COMPONENT SIDE

POWER OUTPUT STAGE (PBTL)

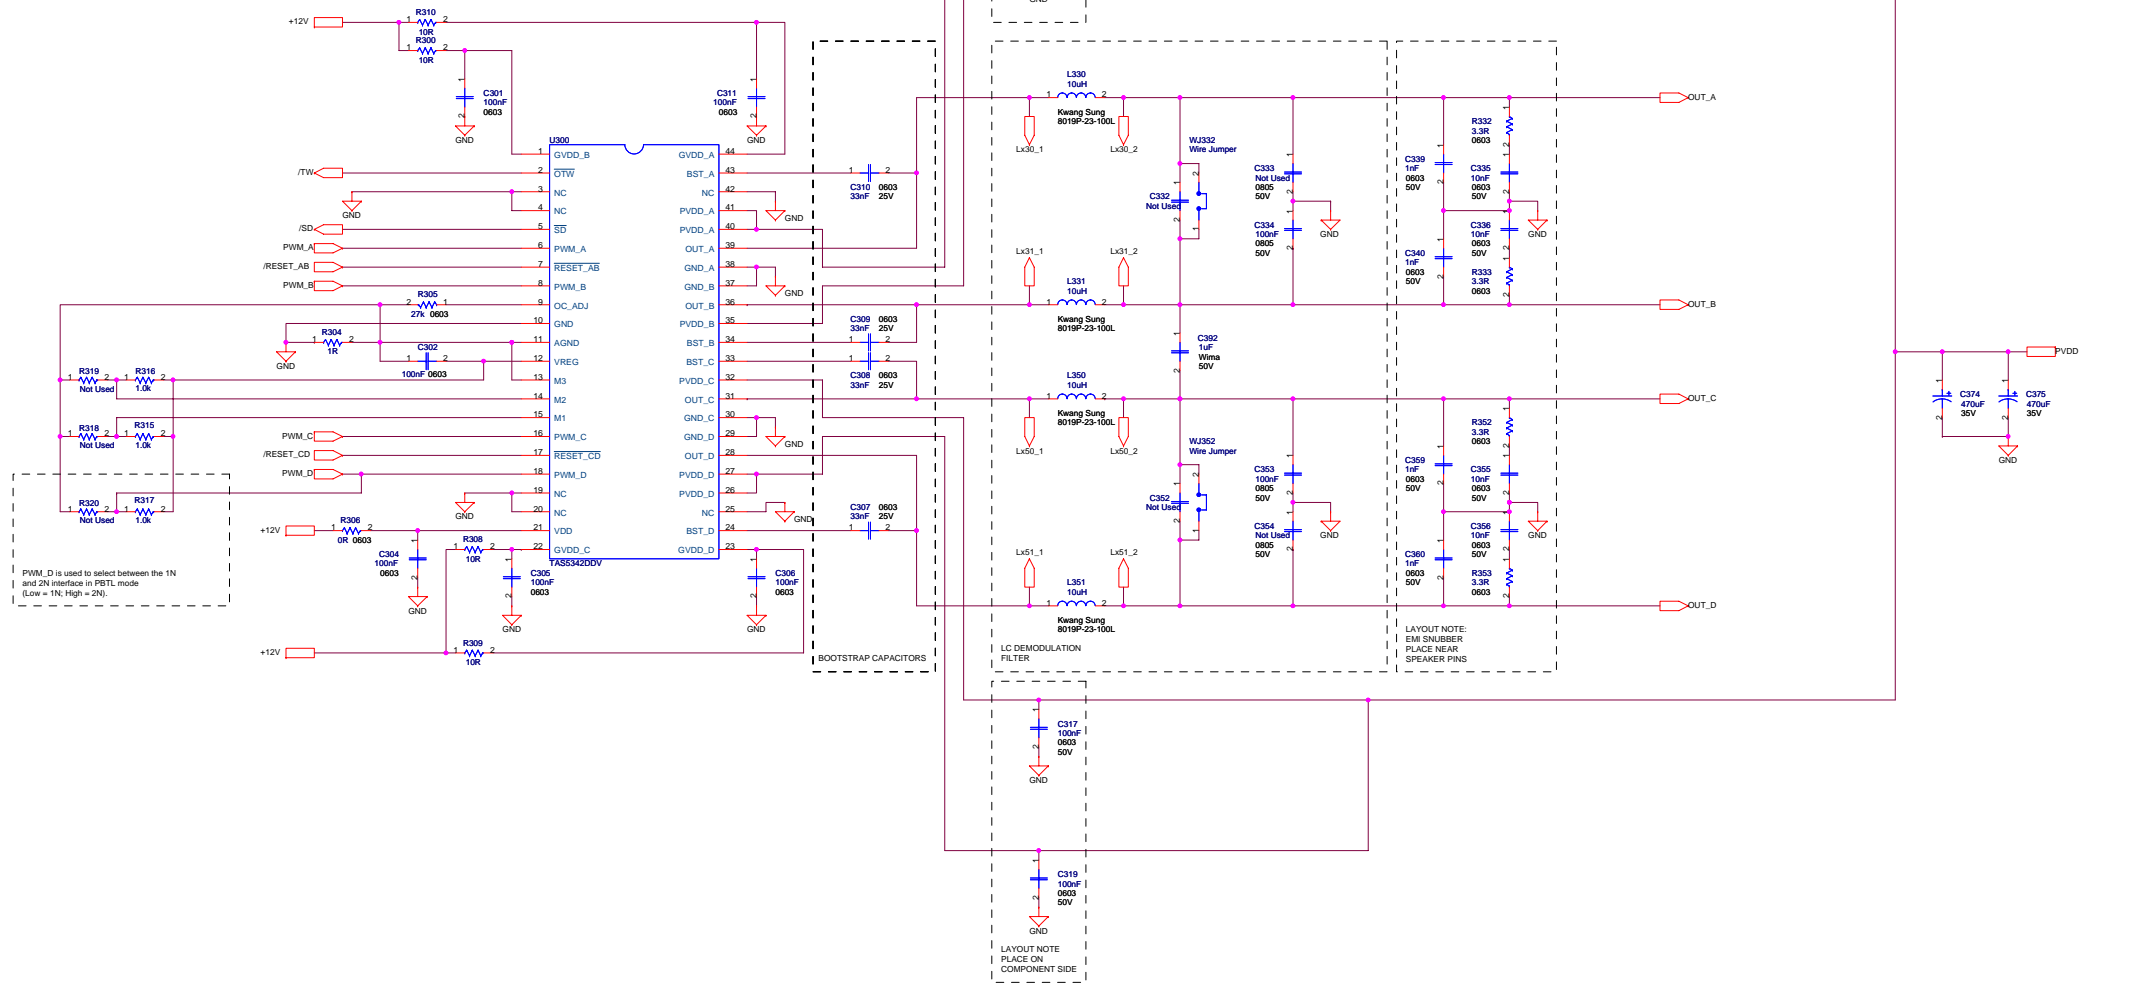


PWM_D is used to select between the 1N and 2N interface in PBTL mode (Low = 1N, High = 2N).






LAYOUT NOTE:
EMI SNUBBER
PLACE NEAR
SPEAKER PINS

LAYOUT NOTE
PLACE ON
COMPONENT SIDE







SUBWOOFER LINE OUT

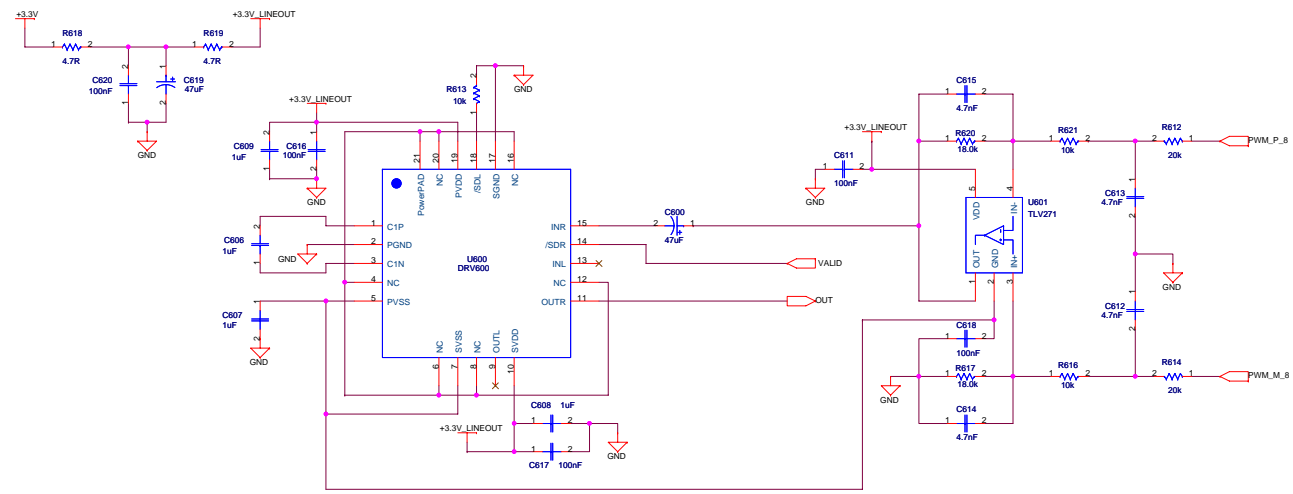

POWER SUPPLIES AND EEPROM

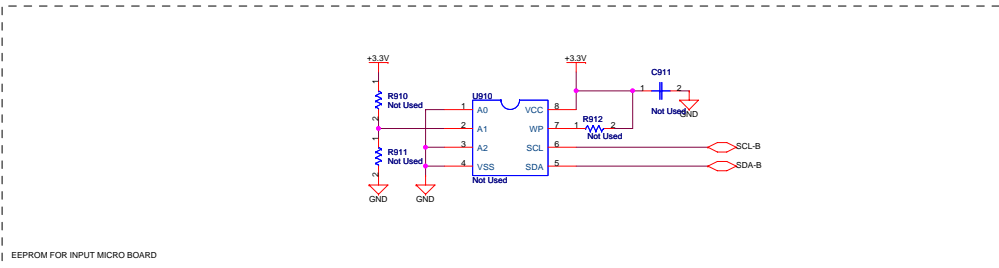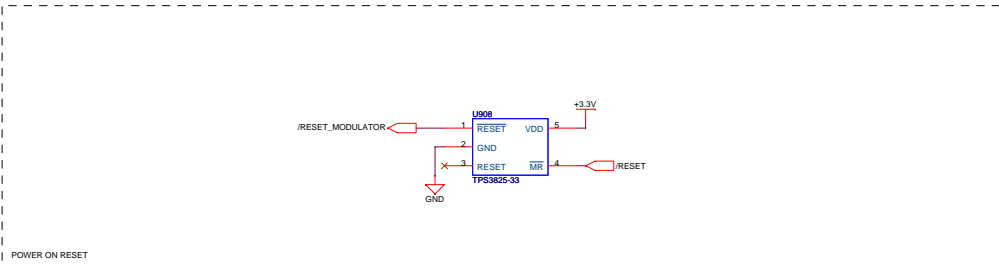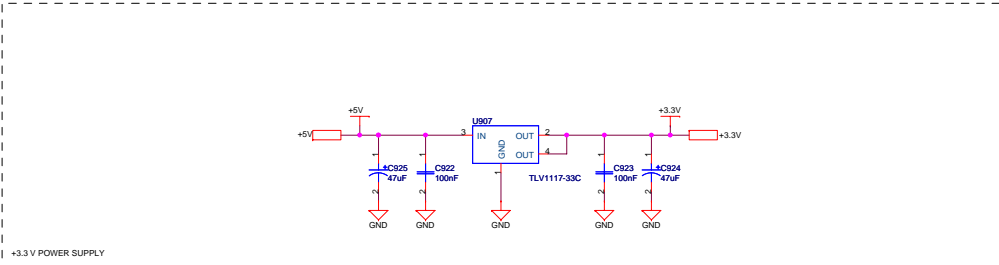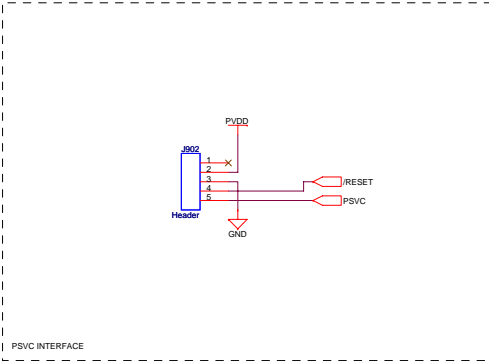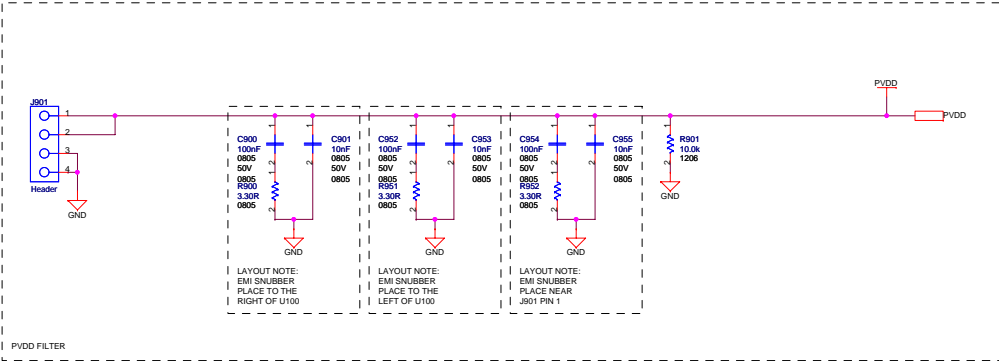

MECHANICS



TAS5342DDV6EVM Partslist (3.00)



Qty	Part Reference	Description	Manufacture	First Mfr P/N
1	R901	10.0k / 250mW / 1% / 1206 Thick Film Resistor	Yageo	RC1206FR-0710KL
3	R900 R951 R952	3.30R / 125mW / 1% / 0805 Thick Film Resistor	Yageo	RC0805FR-073R3L
3	R106 R206 R306	0R / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-070RL
5	R90 R91 R315 R316 R317	1.0k / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-071KL
21	R41 R42 R43 R44 R45 R46 R47 R48 R76 R77 R78 R79 R80 R81 R82 R83 R613 R616 R621	10k / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0710KL
1	R18	1M / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-071ML
3	R17 R21 R304	1R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-071RL
12	R100 R108 R109 R110 R200 R208 R209	10R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0710RL
2	R617 R620	18.0k / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0718KL
2	R10 R11	200R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-07200RL
2	R612 R614	20k / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0720KL
3	R105 R205 R305	27k / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0727KL
12	R132 R133 R152 R153 R232 R233 R252	3.3R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-073R3L
5	R15 R16 R22 R618 R619	4.7R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-074R7L
29	R24 R26 R27 R28 R29 R30 R31 R32 R33 R35 R36 R37 R38 R60 R61 R62 R63 R64 R65 R66 R67 R68 R69 R70 R71 R72 R73 R74 R75	47R / 100mW / 5% / 0603 Thick Film Resistor	Yageo	RC0603JR-0747RL
3	C901 C953 C955	Ceramic 10nF / 50V / 20% X7R 0805 Capacitor	BC Components	0805B103M500NT
13	C133 C134 C153 C154 C233 C234 C253 C254 C334 C353 C900 C952 C954	Ceramic 100nF / 50V / 20% X7R 0805 Capacitor	BC Components	0805B104M500NT
4	C606 C607 C608 C609	Ceramic 1uF / 16V / 20% X7R 0805 Capacitor	BC Components	0805B105M160NT
4	C612 C613 C614 C615	Ceramic 4.7nF / 50V / 10% X7R 0805 Capacitor	BC Components	0805B472K500NT
14	C10 C13 C135 C136 C155 C156 C235 C236 C255 C256 C335 C336 C355 C356	Ceramic 10nF / 50V / 20% X7R 0603 Capacitor	Vishay	VJ0603Y103MXA
39	C11 C12 C14 C15 C17 C21 C22 C25 C27 C28 C30 C60 C61 C101 C102 C104 C105 C106 C111 C201 C202 C204 C205 C206 C211 C301 C302 C304 C305 C306 C311 C611 C616 C617 C618 C620 C922 C923	Ceramic 100nF / 16V / 20% X7R 0603 Capacitor	Vishay	VJ0603Y104MXJ
12	C113 C115 C117 C119 C213 C215 C217 C219 C313 C315 C317 C319	Ceramic 100nF / 50V / 20% X7R 0603 Capacitor	Vishay	VJ0603Y104MXA
12	C107 C108 C109 C110 C207 C208 C209 C210 C307 C308 C309 C310	Ceramic 33nF / 25V / 20% X7R 0603 Capacitor	BC Components	0603B333M250NT
13	C19 C139 C140 C159 C160 C239 C240 C259 C260 C339 C340 C359 C360	Ceramic 1nF / 50V / 10% NP0 0603 Capacitor	BC Components	0603N102K500NT
2	C23 C24	Ceramic 15pF / 50V / 10% NP0 0603 Capacitor	BC Components	0603N150K500NT
9	C16 C20 C26 C29 C62 C600 C619 C924 C925	Electrolytic 47uF / 16V / 20% Aluminium 2mm ø5mm FC Series - Low Impedance Capacitor	Panasonic	EEUFC1C470
6	C174 C175 C274 C275 C374 C375	Electrolytic 470uF / 35V / 20% Aluminium 5mm ø10mm FC Series - Low Impedance Capacitor	Panasonic	EEUFC1V471
1	C392	Metal Film 1uF / 50V / 10% Polyester 7.5mm (W:4.5mm L:10mm) Capacitor	Wima	MKS 4 1uF/10%/50Vdc PCM7.5
4	C132 C152 C232 C252	Metal Film 470nF / 63V / 10% Polyester 5mm (W:4.5mm L:7.2mm) Capacitor	Wima	MKS 2 0.47uF/10%/63Vdc PCM5
12	L130 L131 L150 L151 L230 L231 L250 L251 L330 L331 L350 L351	10uH / Ferrite Inductor	Kwang Sung	8019P-23-100L
2	WJ332 WJ352	Wire Jumper / Wire ø0.9mm (SWG20), Pitch 7.5mm, Copper Tinned Wire Jumper Inductor	n/a	n/a
2	D10 D11	Light Emitting Red Red LED (0603)	Toshiba	TLSU1008
3	U100 U200 U300	TAS5342DDV / STEREO DIGITAL AMPLIFIER POWER STAGE (DDV44)	Texas Instruments	TAS5342DDV
1	U10	TAS5508B / 8 ch PWM processor (AD, DAP, 192kHz, PWM-VOL) (TQFP64)	Texas Instruments	TAS5508BPAG
1	U601	TLV271 / Rtr Output Opamp (SOT23-5)	Texas Instruments	TLV271CDBVT
1	U600	DRV600 / DirectPath(TM) Audio Line Driver (QFN- 20)	Texas Instruments	DRV600RTJT
1	U908	TPS3825-33 / 3.3V Supply Voltage Supervisor (SOP5-DBV)	Texas Instruments	TPS3825-33DBVT
1	U907	TLV1117-33C / 3.3V/800mA Positive Voltage Regulator (SOT4-DCY)	Texas Instruments	TLV1117-33CDCYR
8	SCREW630 SCREW631 SCREW632 SCREW633 SCREW634 SCREW635 SCREW636 SCREW637	M3x6 Pan Head, Pozidriv, A2 Screw	Bossard	BN 81882 M3x6
8	WASHER630 WASHER631 WASHER632 WASHER633 WASHER634 WASHER635 WASHER636 WASHER637	M3 Stainless Steel Spring Washer	Bossard	BN 760 M3
4	STANDOFF634 STANDOFF635 STANDOFF636 STANDOFF637	M3x10 Aluminium Stand-off 5 pins / 1 row / 2.54mm Pitch Vertical Male Friction lock Pin header Header	Ettinger	05.03.108
1	J902	lock Pin header Header	Molex	22-27-2051

TAS5342DDV6EVM Partslist (3.00)



5	J101 J102 J103 J104 J117	2 pins / 1 row / 3.96mm Pitch Vertical Male Pin header Header	JST	B2P-VH
1	J901	4 pins / 1 row / 3.96mm Pitch Vertical Male Pin header Header	JST	B4P-VH
1	J600	Horizontal Female w. Switch Coax Phono socket	Chunfeng	RJ843-4W
1	J10	26 pins / 2 rows / 2.54mm Pitch Vertical Male Low profile IDC 26 pins IDC Box header	Molex	87834-2611
1	X10	13.5MHz 13.5MHz SMD Crystal (HCM49)	Citizen	HCM49-13.500MABJT
1	NOTE1	Schematic Disclaimer Preliminary Note Note	n/a	n/a
1	PCB1	A820-PCB-001_2.00 / TAS5342DDV6EVM Printed Circuit Board (ver. 2.00)	Printline	A820-PCB-001(2.00)
1	HEATSINK630	TIC-HSINK-054_1.00 / Heatsink for 3 DDV packages length 114 mm	Phonotech	TIC-HSINK-054(1.00)


TAS5342DDV6EVM (A820)

PCB SPECIFICATION

Version 2.00

BOARD IDENTIFICATION:	A820-PCB-001(2.00)
BOARD TYPE:	DOUBLE-SIDED PLATED-THROUGH BOARD
LAMINATE TYPE:	FR4
LAMINATE THICKNESS:	1.6 mm
COPPER THICKNESS:	70 μm (INCL. PLATING EXTERIOR LAYER)
COPPER PLATING OF HOLES:	>25 μm
MINIMUM HOLE DIAMETER	0.3 mm
SILKSCREEN COMPONENT SIDE:	WHITE - REMOVE SILKSCREEN FROM SOLDER AREA & PRE-TINNED AREAS
SILKSCREEN SOLDER SIDE:	None
SOLDER MASK COMPONENT SIDE:	GREEN
SOLDER MASK SOLDER SIDE:	GREEN
PROTECTIVE COATING:	SOLDER COATING AND CHEMICAL SILVER ON FREE COPPER
ELECTRICAL TEST:	PCB MUST BE ELECTRICAL TESTED
MANUFACTURED TO:	PERFAG 2E (www.perfag.dk)
APERTURE TABLE:	PERFAG 10A (www.perfag.dk)
BOARD SIZE:	114 x 149 mm
COMMENTS:	SEE DRILL INFORMATION FILE (PCBDOC.ZIP).

TEXAS INSTRUMENTS
TAS5342DDV6VM

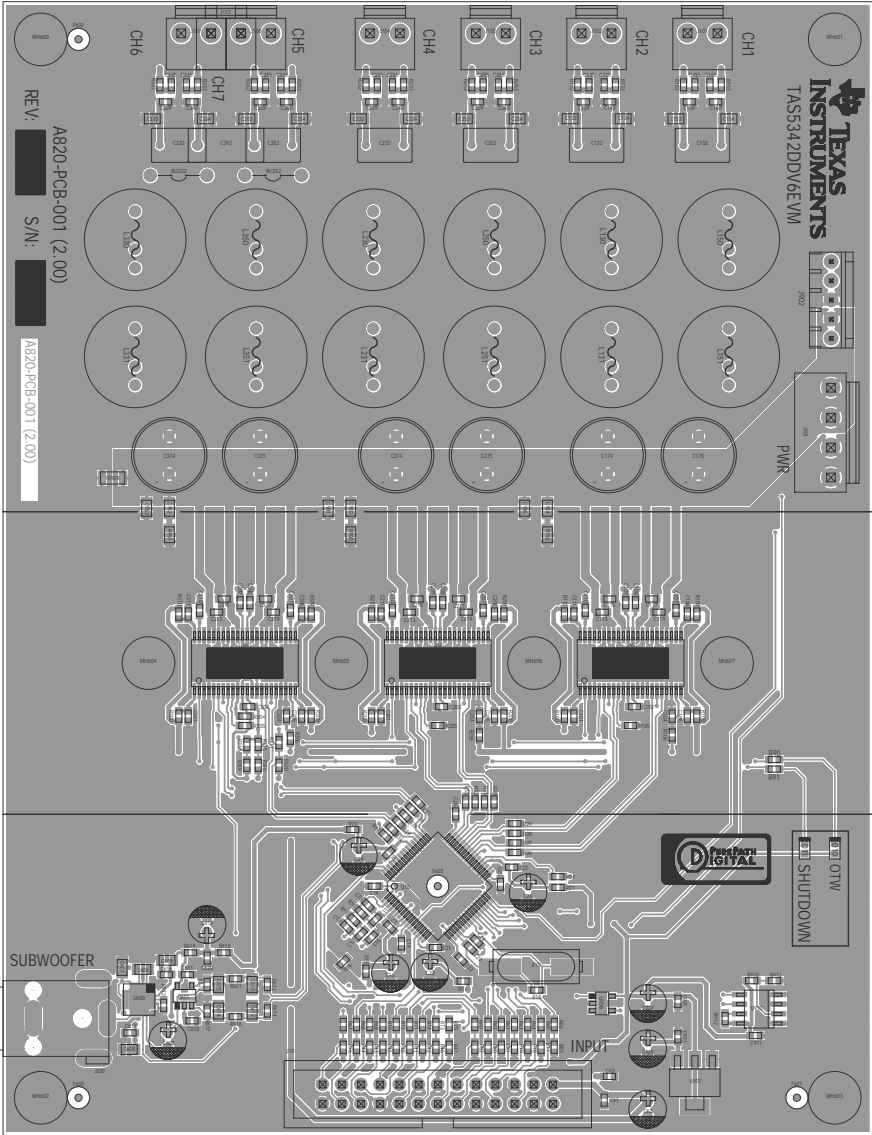


REV: XXXXXXXXXX S/N: XXXXXXXXXX
A820-PCB-001 (2.00) A820-PCB-001 (2.00)

SUBWOOFER


OTW
SHUTDOWN



POS	Texas Instruments Lyngby Hovedgade 4, DK-2800 Lyngby		
	Title TASS342DDV6EVM	Date 2007/NOV/14	
	P/N A820-PCB-001	REV 2	Designer KR/CMS
	LAYER 01 - SHEET 01 OF 06	Engineer Jonas L. Holm	

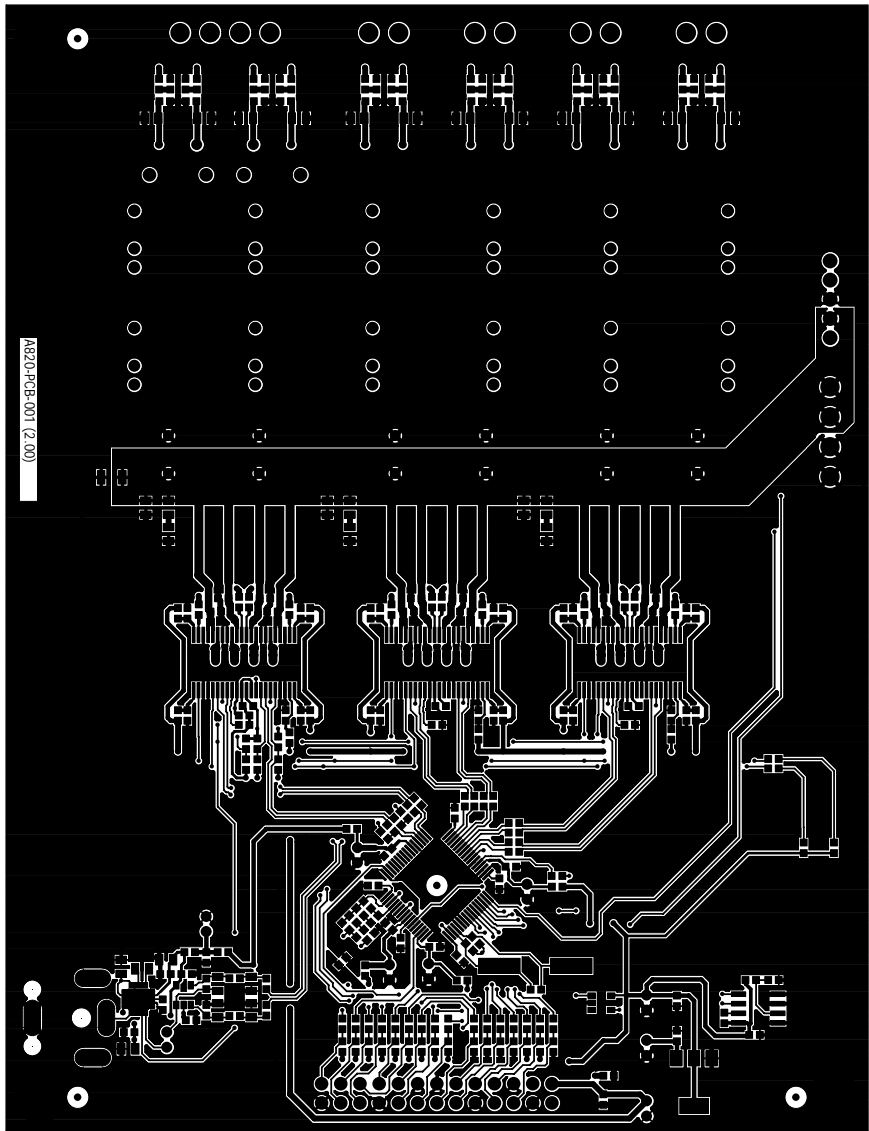

POS	Texas Instruments Lyngby Hovedgade 4, DK-2800 Lyngby		
	Title TASS342DDV6EVM	Date 2007/NOV/14	
	P/N A820-PCB-001	REV 2	Designer KR/CMS
	LAYER 02 - SHEET 02 OF 06	Engineer Jonas L. Holm	



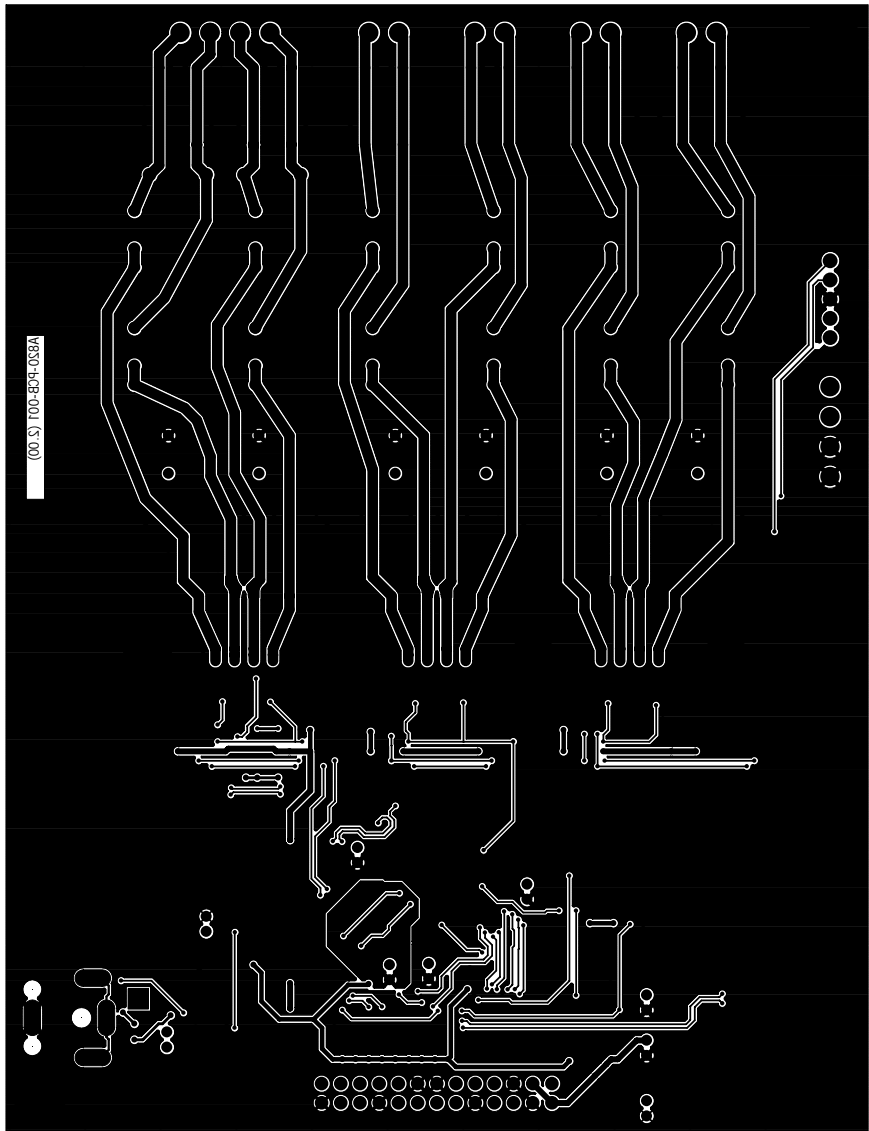


TIC-HSINK-054(1.00)

Heatsink for 3 DDV packages

10.July 2007
TIC-HSINK-054(1.00).dwg

Jonas L. Holm

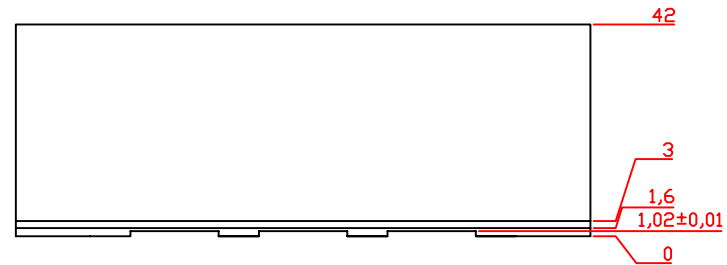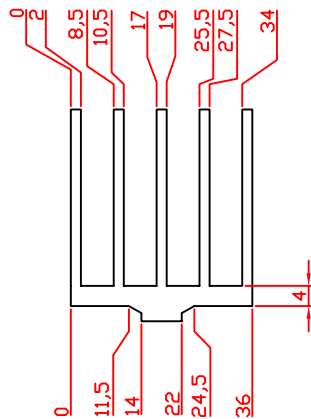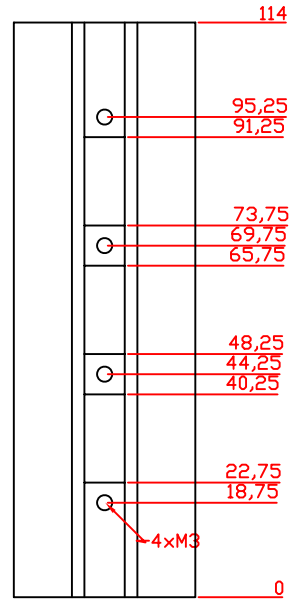

SCALE: 1:1.5
PROFILE: TIC-HSINK-043(1.00)
DIMENSIONS: mm
MATERIAL: ALUMINUM
INTERNAL SCREW THREADS: M3
SURFACE: FREE OF SHARP EDGES
SURFACE TREATMENT: BLACK ANODIZED
TOLERANCES: +/- 0.1 mm

EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive.**

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the power supply voltage range of 0 V to 31.5 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 90°C. The EVM is designed to operate properly with certain components above 125°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated