


Product SKU:	C2016.21.19
	Hook-Up Wire, UL 1007, UL 1569, CSA TR-64, Gauge Size (AWG): 22, Conductor/Strands: 7/30,
	Jacket: Premium Grade PVC, Temperature Range: -20°C to +105°C - Violet - 1000 Ft. Spool
Product Category:	Electronics - Hook-Up Wire - UL 1007, UL 1569, CSA TR-64 - STRANDED CONDUCTORS - Violet

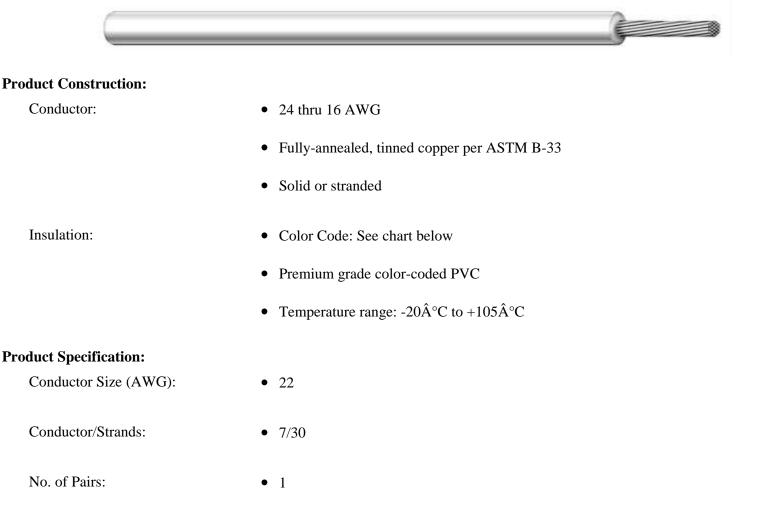

Jacket Color:	•	Violet

Nominal Insulation Thickness	•	0.016
(in):		

Nominal Insulation Thickness	•	0.40
(mm):		

Nominal Outside Diameter (in): • 0.062

Nominal Outside Diameter	•	1.57
(mm):		

Standard Packaging:	٠	1000' Spool
---------------------	---	-------------

Standard Package Quantity:	• 1
UPC #:	• 079407765959
Put-up:	• 1000
SCC-14:	• 50079407765955
Cube:	• 188.37
Weight Per Unit of Measure:	• .0043
ColorOption:	• Violet
Product Information:	
Applications:	• Internal wiring of electrical and electronic equipment
	• Internal wiring of panels and meters
	• Point-to-point wiring
	• Suggested voltage rating: 300 Volts
Compliances:	• CSA TR-64 - 90°C, 300V
	• Designed to Meet UL VW-1 Vertical Wire Flame Test
	• UL Style 1007 - 80°C, 300V
	• UL Style 1569 - 105°C, 300V
Packaging:	• 10,000 foot (3048m) Reels
	• 1000' (305m) Spools
	• Other put-ups available- consult Customer Service

Reference Charts

Color Code Chart

Technical Specifications

Unit Conversion Factors Cable Design Equations - Balanced Pair Insulation and Jacket Properties Temperature Conversion Chart Decimal and Unit Conversion Factors Cable Design Equations - Braid Shield AWG Conductor Chart Conduit Capacity Chart Cable Design Equations - Coaxial Cable Engineering Prefixes Coax Connector Cross Reference Glossary







