


Product SKU:	C2064.21.10
Product Description:	Hook-Up Wire, UL 1007, UL 1569, CSA TR-64, Gauge Size (AWG): 18, Conductor/Strands: 16/30,
	Jacket: Premium Grade PVC, Temperature Range: -20ŰC to +105ŰC - Gray - 1000 Ft. Spool
Product Category:	Electronics - Hook-Up Wire - UL 1007, UL 1569, CSA TR-64 - STRANDED CONDUCTORS - Gray

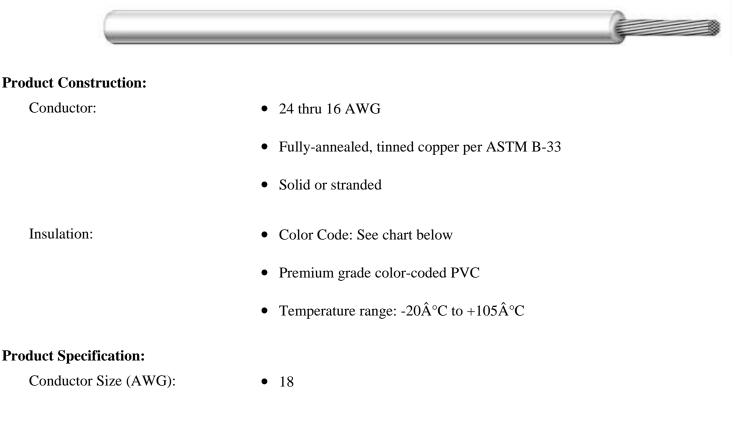

Conductor/Strands: • 16/30

No. of Pairs: • 1

Jacket Color: • Gray

Nominal Insulation Thickness	٠	0.016
(in):		

Nominal Insulation Thickness • 0.40 (mm):

Nominal Outside Diameter (in): • 0.080

Nominal Outside Diameter	•	2.03
(mm):		

Standard Packaging: • 1000' Spool

Standard Package Quantity:	• 1
UPC #:	• 079407767076
Put-up:	• 1000
SCC-14:	• 50079407767077
Cube:	• 328.44
Weight Per Unit of Measure:	• .01
ColorOption:	• Gray
Product Information:	
Applications:	• Internal wiring of electrical and electronic equipment
	• Internal wiring of panels and meters
	• Point-to-point wiring
	• Suggested voltage rating: 300 Volts
Compliances:	• CSA TR-64 - 90°C, 300V
	• Designed to Meet UL VW-1 Vertical Wire Flame Test
	• UL Style 1007 - 80°C, 300V
	• UL Style 1569 - 105°C, 300V
Packaging:	• 10,000 foot (3048m) Reels
	• 1000' (305m) Spools
	• Other put-ups available- consult Customer Service

## **Reference Charts**

Color Code Chart

## **Technical Specifications**

Unit Conversion Factors Cable Design Equations - Balanced Pair Insulation and Jacket Properties Temperature Conversion Chart Decimal and Unit Conversion Factors Cable Design Equations - Braid Shield AWG Conductor Chart Conduit Capacity Chart Cable Design Equations - Coaxial Cable Engineering Prefixes Coax Connector Cross Reference Glossary







