


# Low-Voltage Sprinkler Wire

60°C 30 Volts UL

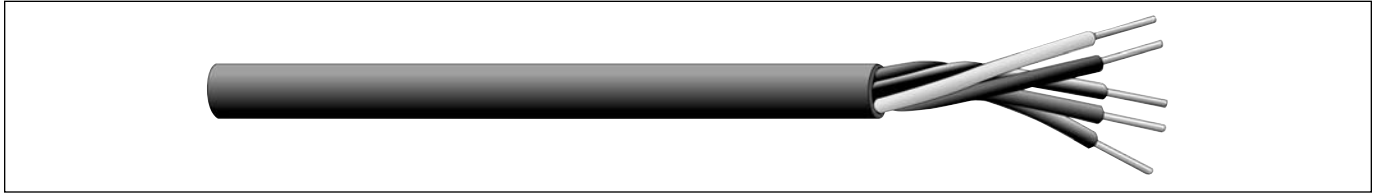

## LOW-VOLTAGE SPRINKLER WIRE - 30 VOLT - UL

CATALOG NUMBER	NO. OF COND.	AWG. SIZE	LENGTH OF CORD (FEET)	PACKAGE TYPE	POWER RATING <sup>(1)</sup>			PKG PER CTN.	APPROX. WEIGHT PER CTN. (LBS) <sup>(5)</sup>	CARTON DIMENSIONS (H x W x D)	UPC NUMBER
					VOLTS	AMPS	WATTS				
23824.60.01	4	18	100	Cuff	30	15	450	6	22	8.5 x 12.25 x 14	079407238248
23804.18.01	4	18	500	Spool	30	15	450	1	18	10.625 x 10.625 x 6.313	079407908047
23815.60.01	5	18	50	Cuff	30	15	450	6	13	8.5 x 12.25 x 14	079407238156
23825.60.01	5	18	100	Cuff	30	15	450	6	27	9.5 x 14 x 17	079407238255
23805.18.01	5	18	500	Spool	30	15	450	1	22	10.625 x 10.625 x 6.313	079407908054
23817.60.01	7	18	50	Cuff	30	15	450	6	18	8.5 x 12.25 x 14	079407238170
23827.60.01	7	18	100	Cuff	30	15	450	6	36	9.5 x 14 x 17	079407238279
23807.18.01	7	18	500	Spool	30	15	450	1	31	10.625 x 10.625 x 10.313	079407908078
23810.18.01	10	18	500	Reel	30	15	450	1	44	-	079407908108

<sup>(1)</sup> Amps and watts are offered ONLY as a guide to the end user.  
<sup>(5)</sup> Actual shipping weight may vary.

### Product Construction:

#### Conductor:

- 18 AWG. fully annealed solid bare copper per ASTM B-3

#### Insulation:

- Premium-grade, color-coded PVC
- Premium-grade PE jacket, Black
- Nylon rip cord to facilitate jacket removal
- Temperature Range: -20°C to +60°C
- Color Code: See chart below

#### Jacket Marking:

- CAROL (SIZE) 30V SPRINKLER SYSTEMS WIRE - DIRECT BURIAL E54567 (UL)

#### Applications:

- Low-voltage golf course satellite sprinkler control
- Residential sprinkler solenoid control

#### Industry Approvals:

- UL Listed under a UL Miscellaneous Wire file
- UL Listed for outdoors applications
- UL Listed for direct burial applications
- RoHS Compliant

#### Packaging:

- See tabular data above
- Other put-ups available on special order

#### COLOR CODE CHART

1	Black	4	Green	7	Blue	10	Purple
2	White	5	Orange	8	Brown		
3	Red	6	Yellow	9	Gray		

