

Type 381EL 105 °C Ultra-Long Life Snap-In, Aluminum

More than 100,000 Hours Operation at 65 °C and Rated 105 °C Ripple



The new 381EL extends expected life capability to 15 years or more in typical applications. And that's with the 105 °C rated ripple current applied. With 3.5 times the life of our long-life Type 381LX, the Type 381EL is the choice for hot applications like industrial power supplies, inverter lighting systems and motor drives.

Highlights

- High value extended life.
- Withstands 7000 hours at 105 °C with rated ripple current.
- Expected life more than 100,000 hours at 65 °C with rated ripple.
- Rated voltage to 450 Vdc.
- Made in USA.
- 50% more ripple current than 381L.

Specifications

Operating Temperature:

-40 °C to + 105 °C up to 300 V, -25 °C to 105 °C ≥ 315 V

Rated Voltage:

160 to 450 Vdc

Capacitance:

39 μ F to 2,200 μ F $\pm 20\%$

Leakage Current:

$\leq 3 \sqrt{CV}$ μ A, at 5 minutes

Ripple Current Multipliers:

Ambient Temperature

45 °C	60 °C	70 °C	85 °C	105 °C
2.35	2.20	2.00	1.55	1.00

Frequency

50Hz	60 Hz	120 Hz	500 Hz	1 kHz	10 kHz & up
0.75	0.80	1.00	1.20	1.25	1.40

EIA Ripple Life:

20,000 h at 85 °C, per EIA IS-749 with 105 °C ripple current.

Δ Capacitance $\pm 20\%$

ESR 200% of limit

Load LifeTest:

7000 h at full load at 105 °C

Δ Capacitance $\pm 20\%$

ESR 200% of limit

DCL 100% of limit

Shelf Life:

1000 h at 105 °C

Δ Capacitance $\pm 20\%$

ESR 200% of limit

DCL 100% of limit

Vibration:


10 to 55 Hz, 0.06" and 10 g max, 2 h each plane



Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).

Type 381EL 105 °C Ultra-Long Life Snap-In, Aluminum


Outline Drawing

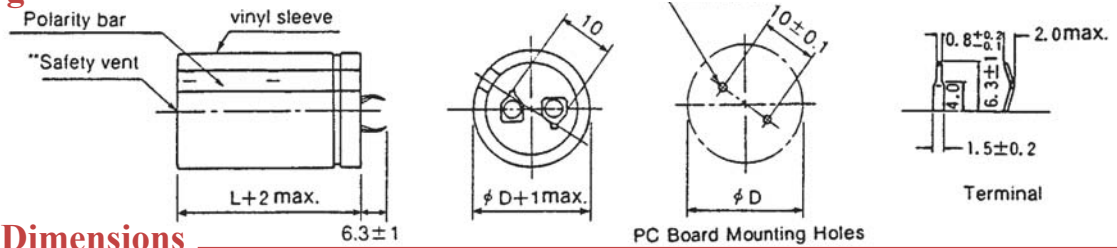




Insulated Case Dimensions

Case Code	DIAMETER D		LENGTH L		Typical Weight (grams)
	mm	inches	mm	inches	
H01	22	0.87	25	0.98	16
H02	22	0.87	30	1.18	19
H03	22	0.87	35	1.38	22
H04	22	0.87	40	1.57	24
H45	22	0.87	45	1.77	28
H05	22	0.87	50	1.97	31
J01	25	0.98	25	0.98	20
J02	25	0.98	30	1.18	24
J03	25	0.98	35	1.38	27
J04	25	0.98	40	1.57	31
J45	25	0.98	45	1.77	35
J05	25	0.98	50	1.97	38
K01	30	1.18	25	0.98	30
K02	30	1.18	30	1.18	35
K03	30	1.18	35	1.38	40
K04	30	1.18	40	1.57	44
K45	30	1.18	45	1.77	49
K05	30	1.18	50	1.97	53
A01	35	1.38	25	0.98	42
A02	35	1.38	30	1.18	48
A03	35	1.38	35	1.38	54
A04	35	1.38	40	1.57	60
A45	35	1.38	45	1.77	67
A05	35	1.38	50	1.97	74

Part Numbering System

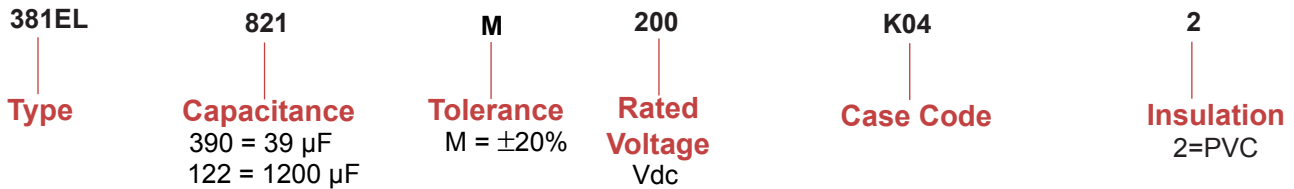


Typical Performance Curves

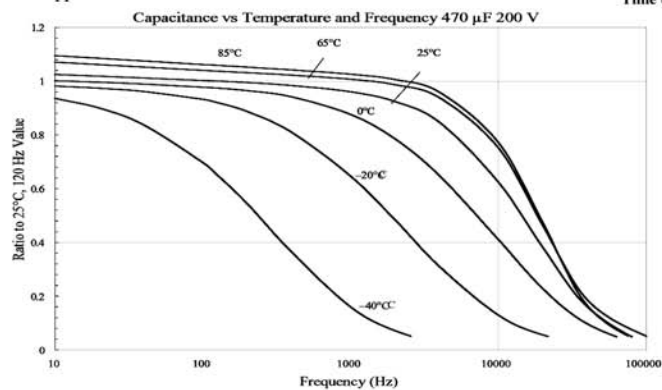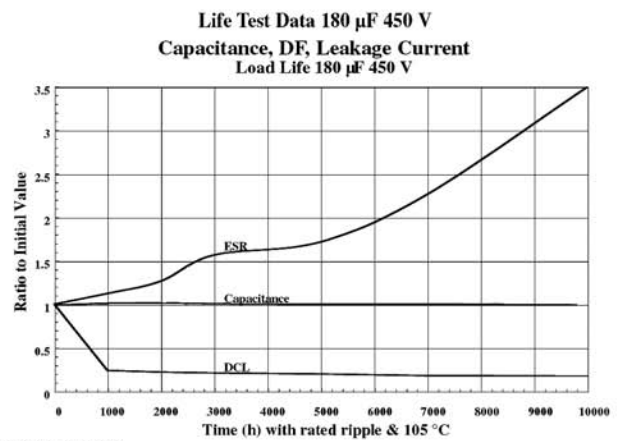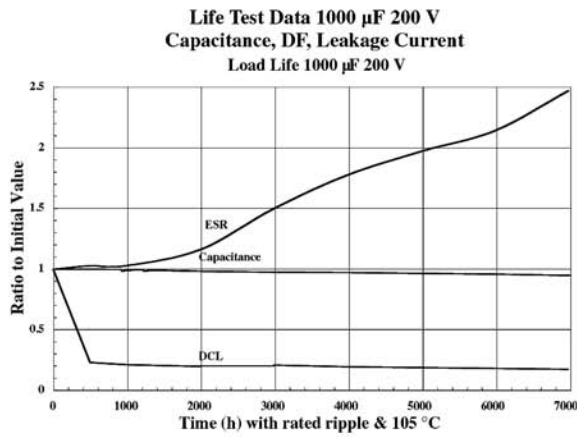


Type 381EL 105 °C Ultra-Long Life Snap-In, Aluminum

Capacitance vs Temperature and Frequency 100 µF 400 V

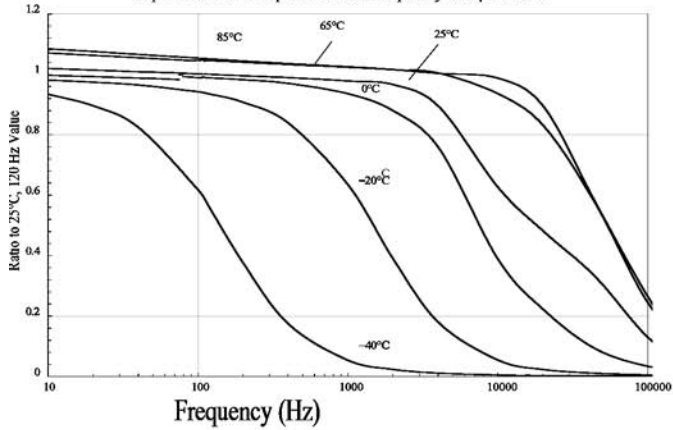

Type 381EL Operating Life in Kilohours vs Ripple Current

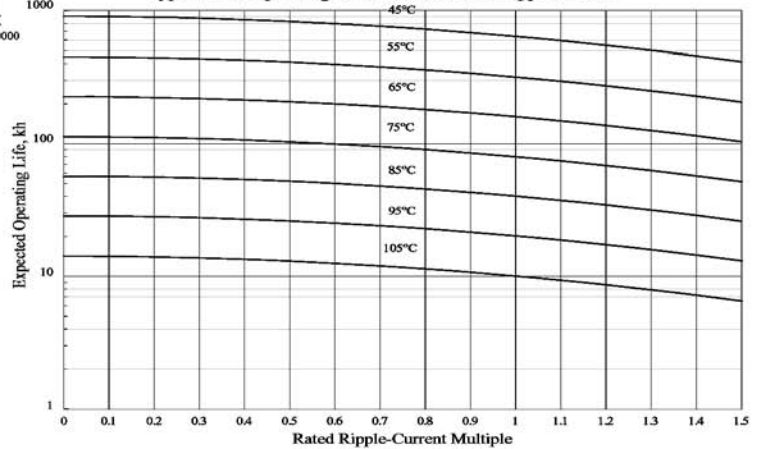

Ratings

Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)
			120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	
160 Vdc (200 Vdc Surge)							
270	381EL271M160H012	0.12	0.66	0.30	1.10	1.54	22 x 25
330	381EL331M160H022	0.12	0.54	0.24	1.20	1.68	22 x 30
390	381EL391M160H022	0.12	0.45	0.20	1.30	1.82	22 x 30
390	381EL391M160J012	0.12	0.45	0.20	1.30	1.82	25 x 25
470	381EL471M160H032	0.12	0.38	0.17	1.40	1.96	22 x 35
470	381EL471M160J022	0.12	0.38	0.17	1.40	1.96	25 x 30
560	381EL561M160H042	0.12	0.32	0.14	1.50	2.10	22 x 40
560	381EL561M160J022	0.12	0.32	0.14	1.50	2.10	25 x 30
560	381EL561M160K012	0.12	0.32	0.14	1.50	2.10	30 x 25
680	381EL681M160H452	0.12	0.26	0.12	1.70	2.38	22 x 45
680	381EL681M160J032	0.12	0.26	0.12	1.70	2.38	25 x 35
680	381EL681M160K022	0.12	0.26	0.12	1.70	2.38	30 x 30
820	381EL821M160J042	0.12	0.22	0.10	2.00	2.80	25 x 40
820	381EL821M160K022	0.12	0.22	0.10	2.00	2.80	30 x 30
1000	381EL102M160J452	0.12	0.18	0.08	2.20	3.08	25 x 45
1000	381EL102M160K032	0.12	0.18	0.08	2.20	3.08	30 x 35
1200	381EL122M160J052	0.13	0.16	0.08	2.30	3.22	25 x 50
1200	381EL122M160K042	0.13	0.16	0.08	2.30	3.22	30 x 40
1200	381EL122M160A032	0.13	0.16	0.08	2.30	3.22	35 x 35
1500	381EL152M160K452	0.13	0.13	0.06	2.50	3.50	30 x 45
1500	381EL152M160A032	0.13	0.13	0.06	2.50	3.50	35 x 35
1800	381EL182M160K052	0.14	0.12	0.06	2.70	3.78	30 x 50
1800	381EL182M160A042	0.14	0.12	0.06	2.70	3.78	35 x 40
2200	381EL222M160A052	0.14	0.09	0.06	2.90	4.06	35 x 50

Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)
			120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	
180 Vdc (225 Vdc Surge)							
220	381EL221M180H012	0.12	0.80	0.36	1.00	1.40	22 x 25
270	381EL271M180H012	0.12	0.66	0.30	1.10	1.54	22 x 25
330	381EL331M180H022	0.12	0.54	0.24	1.20	1.68	22 x 30
330	381EL331M180J012	0.12	0.54	0.24	1.20	1.68	25 x 25
390	381EL391M180H022	0.12	0.45	0.20	1.30	1.82	22 x 30
390	381EL391M180J012	0.12	0.45	0.20	1.30	1.82	25 x 25
470	381EL471M180H032	0.12	0.38	0.17	1.40	1.96	22 x 35
470	381EL471M180J022	0.12	0.38	0.17	1.40	1.96	25 x 30
470	381EL471M180K012	0.12	0.38	0.17	1.40	1.96	30 x 25
560	381EL561M180H042	0.12	0.32	0.14	1.50	2.10	22 x 40
560	381EL561M180J032	0.12	0.32	0.14	1.50	2.10	25 x 35
560	381EL561M180K012	0.12	0.32	0.14	1.50	2.10	30 x 25
680	381EL681M180H052	0.12	0.26	0.12	1.70	2.38	22 x 50
680	381EL681M180J042	0.12	0.26	0.12	1.70	2.38	25 x 40
680	381EL681M180K022	0.12	0.26	0.12	1.70	2.38	30 x 30
820	381EL821M180J452	0.12	0.22	0.10	2.00	2.80	25 x 45
820	381EL821M180K032	0.13	0.23	0.11	2.00	2.80	30 x 35
820	381EL821M180A022	0.13	0.23	0.11	2.00	2.80	35 x 30
1000	381EL102M180K042	0.13	0.19	0.10	2.20	3.08	30 x 40
1000	381EL102M180A022	0.13	0.19	0.10	2.20	3.08	35 x 30
1200	381EL122M180K452	0.13	0.16	0.08	2.30	3.22	30 x 45
1200	381EL122M180A032	0.14	0.17	0.09	2.30	3.22	35 x 35
1500	381EL152M180K052	0.14	0.14	0.07	2.50	3.50	30 x 50
1500	381EL152M180A042	0.14	0.14	0.07	2.50	3.50	35 x 40

Type 381EL 105 °C Ultra-Long Life Snap-In, Aluminum

Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)	Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)
			120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)					120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	
2200	381EL222M180A052	0.14	0.094	0.067	2.9	4.06	35 x 50	680	381EL681M250A032	0.1	0.22	0.12	1.70	2.38	35 x 35
200 Vdc (250 Vdc Surge)								820	381EL821M250K052	0.1	0.18	0.10	2.00	2.80	30 x 50
220	381EL221M200H012	0.12	0.80	0.36	1.00	1.40	22 x 25	820	381EL821M250A042	0.1	0.18	0.10	2.00	2.80	35 x 40
270	381EL271M200H022	0.12	0.66	0.30	1.10	1.54	22 x 30	1000	381EL102M250A452	0.12	0.18	0.10	2.20	3.08	35 x 45
270	381EL271M200J012	0.12	0.66	0.30	1.10	1.54	25 x 25	1200	381EL122M250A052	0.12	0.15	0.09	2.30	3.22	35 x 50
330	381EL331M200H022	0.12	0.54	0.24	1.20	1.68	22 x 30	315 Vdc (365 Vdc Surge)							
330	381EL331M200J012	0.12	0.54	0.24	1.20	1.68	25 x 25	82	381EL820M315H012	0.1	1.80	0.90	0.64	0.90	22 x 25
390	381EL391M200H032	0.12	0.45	0.20	1.30	1.82	22 x 35	100	381EL101M315H022	0.1	1.47	0.74	0.69	0.97	22 x 30
390	381EL391M200J022	0.12	0.45	0.20	1.30	1.82	25 x 30	120	381EL121M315H022	0.1	1.23	0.61	0.75	1.05	22 x 30
390	381EL391M200K012	0.12	0.45	0.20	1.30	1.82	30 x 25	120	381EL121M315J012	0.1	1.23	0.61	0.75	1.05	25 x 25
470	381EL471M200H042	0.12	0.38	0.17	1.40	1.96	22 x 40	150	381EL151M315H032	0.1	0.98	0.49	0.82	1.15	22 x 35
470	381EL471M200J032	0.12	0.38	0.17	1.40	1.96	25 x 35	150	381EL151M315J022	0.1	0.98	0.49	0.82	1.15	25 x 30
470	381EL471M200K022	0.12	0.38	0.17	1.40	1.96	30 x 30	150	381EL151M315K012	0.1	0.98	0.49	0.82	1.15	30 x 25
560	381EL561M200H452	0.12	0.32	0.14	1.50	2.10	22 x 45	180	381EL181M315H042	0.1	0.82	0.41	0.90	1.26	22 x 40
560	381EL561M200J032	0.12	0.32	0.14	1.50	2.10	25 x 35	180	381EL181M315J032	0.1	0.82	0.41	0.90	1.26	25 x 35
560	381EL561M200K022	0.12	0.32	0.14	1.50	2.10	30 x 30	180	381EL181M315K012	0.1	0.82	0.41	0.90	1.26	30 x 25
680	381EL681M200J042	0.12	0.26	0.12	1.70	2.38	25 x 40	220	381EL221M315H452	0.11	0.74	0.37	1.00	1.40	22 x 45
680	381EL681M200K032	0.12	0.26	0.12	1.70	2.38	30 x 35	220	381EL221M315J042	0.11	0.74	0.37	1.00	1.40	25 x 40
820	381EL821M200J052	0.12	0.22	0.10	2.00	2.80	25 x 50	220	381EL221M315K022	0.11	0.74	0.37	1.00	1.40	30 x 30
820	381EL821M200K042	0.12	0.22	0.10	2.00	2.80	30 x 40	270	381EL271M315J452	0.11	0.60	0.30	1.10	1.54	25 x 45
820	381EL821M200A022	0.12	0.22	0.10	2.00	2.80	35 x 30	270	381EL271M315K032	0.11	0.60	0.30	1.10	1.54	30 x 35
1000	381EL102M200K452	0.12	0.18	0.09	2.20	3.08	30 x 45	270	381EL271M315A022	0.11	0.60	0.30	1.10	1.54	35 x 30
1000	381EL102M200A032	0.12	0.18	0.09	2.20	3.08	35 x 35	330	381EL331M315J052	0.11	0.49	0.25	1.20	1.68	25 x 50
1200	381EL122M200K052	0.13	0.16	0.08	2.30	3.22	30 x 50	330	381EL331M315K042	0.11	0.49	0.25	1.20	1.68	30 x 40
1200	381EL122M200A042	0.13	0.16	0.08	2.30	3.22	35 x 40	330	381EL331M315A022	0.11	0.49	0.25	1.20	1.68	35 x 30
1500	381EL152M200A052	0.13	0.13	0.06	2.50	3.50	35 x 50	390	381EL391M315K452	0.12	0.45	0.23	1.30	1.82	30 x 45
250 Vdc (300 Vdc Surge)								390	381EL391M315A032	0.12	0.45	0.23	1.30	1.82	35 x 35
180	381EL181M250H022	0.1	0.82	0.41	0.90	1.26	22 x 30	470	381EL471M315K052	0.12	0.38	0.19	1.40	1.96	30 x 50
180	381EL181M250J012	0.1	0.82	0.41	0.90	1.26	25 x 25	470	381EL471M315A042	0.12	0.38	0.19	1.40	1.96	35 x 40
220	381EL221M250H022	0.1	0.67	0.34	1.00	1.40	22 x 30	560	381EL561M315A452	0.12	0.32	0.16	1.50	2.10	35 x 45
220	381EL221M250J012	0.1	0.67	0.34	1.00	1.40	25 x 25	680	381EL681M315A052	0.12	0.26	0.14	1.70	2.38	35 x 50
270	381EL271M250H032	0.1	0.55	0.27	1.10	1.54	22 x 35	350 Vdc (400 Vdc Surge)							
270	381EL271M250J022	0.1	0.55	0.27	1.10	1.54	25 x 30	82	381EL820M350H012	0.1	1.80	0.90	0.64	0.90	22 x 25
270	381EL271M250K012	0.1	0.55	0.27	1.10	1.54	30 x 25	100	381EL101M350H022	0.1	1.47	0.74	0.69	0.97	22 x 30
330	381EL331M250H042	0.1	0.45	0.22	1.20	1.68	22 x 40	100	381EL101M350J012	0.1	1.47	0.74	0.69	0.97	25 x 25
330	381EL331M250J032	0.1	0.45	0.22	1.20	1.68	25 x 35	120	381EL121M350H032	0.1	1.23	0.61	0.75	1.05	22 x 35
330	381EL331M250K012	0.1	0.45	0.22	1.20	1.68	30 x 25	120	381EL121M350J022	0.1	1.23	0.61	0.75	1.05	25 x 30
390	381EL391M250H452	0.1	0.38	0.19	1.30	1.82	22 x 45	150	381EL151M350H042	0.1	0.98	0.49	0.82	1.15	22 x 40
390	381EL391M250J032	0.1	0.38	0.19	1.30	1.82	25 x 35	150	381EL151M350J022	0.1	0.98	0.49	0.82	1.15	25 x 30
390	381EL391M250K022	0.1	0.38	0.19	1.30	1.82	30 x 30	150	381EL151M350K012	0.1	0.98	0.49	0.82	1.15	30 x 25
470	381EL471M250J452	0.1	0.31	0.16	1.40	1.96	25 x 45	180	381EL181M350H452	0.1	0.82	0.41	0.90	1.26	22 x 45
470	381EL471M250K032	0.1	0.31	0.16	1.40	1.96	30 x 35	180	381EL181M350J032	0.1	0.82	0.41	0.90	1.26	25 x 35
470	381EL471M250A022	0.1	0.31	0.16	1.40	1.96	35 x 30	180	381EL181M350K022	0.1	0.82	0.41	0.90	1.26	30 x 30
560	381EL561M250J052	0.1	0.26	0.13	1.50	2.10	25 x 50	220	381EL221M350H052	0.11	0.74	0.37	1.00	1.40	22 x 50
560	381EL561M250K032	0.1	0.26	0.13	1.50	2.10	30 x 35	220	381EL221M350J042	0.11	0.74	0.37	1.00	1.40	25 x 40
560	381EL561M250A022	0.1	0.26	0.13	1.50	2.10	35 x 30	220	381EL221M350K022	0.11	0.74	0.37	1.00	1.40	30 x 30

Type 381EL 105 °C Ultra-Long Life Snap-In, Aluminum

Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)
			120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	
270	381EL271M350J052	0.11	0.60	0.30	1.10	1.54	25 x 50
270	381EL271M350K032	0.11	0.60	0.30	1.10	1.54	30 x 35
270	381EL271M350A022	0.11	0.60	0.30	1.10	1.54	35 x 30
330	381EL331M350K452	0.11	0.49	0.25	1.20	1.68	30 x 45
330	381EL331M350A032	0.11	0.49	0.25	1.20	1.68	35 x 35
390	381EL391M350K052	0.12	0.45	0.23	1.30	1.82	30 x 50
390	381EL391M350A042	0.12	0.45	0.23	1.30	1.82	35 x 40
470	381EL471M350A042	0.12	0.38	0.19	1.40	1.96	35 x 40
560	381EL561M350A052	0.12	0.32	0.16	1.50	2.10	35 x 50
400 Vdc (450 Vdc Surge)							
56	381EL560M400H012	0.1	2.63	0.92	0.51	0.71	22 x 25
68	381EL680M400H022	0.1	2.17	0.76	0.56	0.78	22 x 30
68	381EL680M400J012	0.1	2.17	0.76	0.56	0.78	25 x 25
82	381EL820M400H032	0.1	1.80	0.63	0.64	0.90	22 x 35
82	381EL820M400J012	0.1	1.80	0.63	0.64	0.90	25 x 25
100	381EL101M400H032	0.1	1.47	0.52	0.69	0.97	22 x 35
100	381EL101M400J022	0.1	1.47	0.52	0.69	0.97	25 x 30
120	381EL121M400H042	0.1	1.23	0.43	0.75	1.05	22 x 40
120	381EL121M400J032	0.1	1.23	0.43	0.75	1.05	25 x 35
120	381EL121M400K012	0.1	1.23	0.43	0.75	1.05	30 x 25
150	381EL151M400H052	0.1	0.98	0.34	0.82	1.15	22 x 50
150	381EL151M400J042	0.1	0.98	0.34	0.82	1.15	25 x 40
150	381EL151M400K022	0.1	0.98	0.34	0.82	1.15	30 x 30
180	381EL181M400J452	0.1	0.82	0.29	0.90	1.26	25 x 45
180	381EL181M400K032	0.1	0.82	0.29	0.90	1.26	30 x 35
180	381EL181M400A022	0.1	0.82	0.29	0.90	1.26	35 x 25
220	381EL221M400J052	0.1	0.67	0.23	1.00	1.40	25 x 50
220	381EL221M400K042	0.1	0.67	0.23	1.00	1.40	30 x 40
220	381EL221M400A022	0.1	0.67	0.23	1.00	1.40	35 x 30
270	381EL271M400K452	0.1	0.55	0.19	1.10	1.54	30 x 45

Cap. (µF)	Catalog Part Number	DF Max 120Hz	ESR Max @ 25° C		Ripple Amps @ 105 °C		Nominal Size D x L (mm)
			120 Hz (Ω)	20 kHz (Ω)	120 Hz (A)	20 kHz (A)	
270	381EL271M400A032	0.1	0.546	0.191	1.1	1.54	35 x 35
330	381EL331M400K052	0.1	0.447	0.179	1.2	1.68	30 x 50
330	381EL331M400A042	0.1	0.447	0.179	1.2	1.68	35 x 40
390	381EL391M400A452	0.1	0.378	0.151	1.3	1.82	35 x 45
470	381EL471M400A052	0.1	0.314	0.125	1.4	1.96	35 x 50
450 Vdc (500 Vdc Surge)							
39	381EL390M450H012	0.1	3.78	1.32	0.37	0.52	22 x 25
47	381EL470M450H022	0.1	3.14	1.10	0.40	0.56	22 x 30
56	381EL560M450H032	0.1	2.63	0.92	0.47	0.66	22 x 35
56	381EL560M450J012	0.1	2.63	0.92	0.47	0.66	25 x 25
68	381EL680M450H042	0.1	2.17	0.76	0.53	0.74	22 x 40
68	381EL680M450J022	0.1	2.17	0.76	0.53	0.74	25 x 30
82	381EL820M450H452	0.1	1.80	0.63	0.56	0.78	22 x 45
82	381EL820M450J032	0.1	1.80	0.63	0.56	0.78	25 x 35
82	381EL820M450K012	0.1	1.80	0.63	0.56	0.78	30 x 25
100	381EL101M450H052	0.1	1.47	0.52	0.64	0.90	22 x 50
100	381EL101M450J042	0.1	1.47	0.52	0.64	0.90	25 x 40
100	381EL101M450K022	0.1	1.47	0.52	0.64	0.90	30 x 30
120	381EL121M450J452	0.1	1.23	0.43	0.72	1.01	25 x 45
120	381EL121M450K022	0.1	1.23	0.43	0.72	1.01	30 x 30
150	381EL151M450J052	0.1	0.98	0.34	0.79	1.11	25 x 50
150	381EL151M450K042	0.1	0.98	0.34	0.79	1.11	30 x 40
150	381EL151M450A022	0.1	0.98	0.34	0.79	1.11	35 x 30
180	381EL181M450K452	0.1	0.82	0.29	0.87	1.22	30 x 45
180	381EL181M450A032	0.1	0.82	0.29	0.87	1.22	35 x 35
220	381EL221M450K052	0.1	0.67	0.23	1.00	1.40	30 x 50
220	381EL221M450A042	0.1	0.67	0.23	1.00	1.40	35 x 40
270	381EL271M450A452	0.1	0.55	0.19	1.19	1.67	35 x 45
330	381EL331M450A052	0.1	0.45	0.16	1.38	1.93	35 x 50