


Metallized Polyester Film Capacitor

Type: **ECQUY [Class Y]**

In accordance with UL/CSA and European safety regulations class Y

■ Features


- Compact
- Overvoltage stress withstanding
- Flame-retardant epoxy resin coating
- RoHS directive compliant



■ Recommended Applications

- Interference suppressors

■ Explanation of Part Numbers

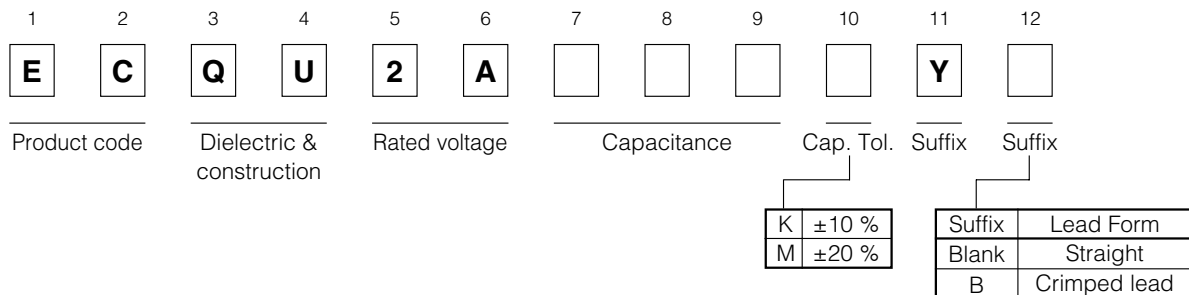

■ Applicable Standard & Approval Number

UL	UL 1414	Across-The-Line Capacitors Antenna-Coupling and Line-By-Pass Components
CSA	CSA C22.2 No.1	Across-the-line capacitors Antenna-Isolation and line-by-pass capacitors
SEMKO	IEC 60384-14 EN 132400	Class Y3/X2
DEMKO		
NEMKO		
FIMKO		
VDE		
SEV		

*When applying this capacitor to European and American safety standards, please use type designation and rating such as ECO-UY, 0.01 μF.


*Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

■ Specifications

Category temp. range	-40 °C to +100 °C (+85 °C max. on UL/CSA spec.)
Rated voltage	250 VAC
Capacitance range	0.0010 μF to 0.047 μF (E12)
Capacitance tolerance	±10 % (K), ±20 % (M)
Dissipation factor (tanδ)	tanδ ≤ 1.0 % (20°C, 1kHz)
Withstand voltage	Between terminals : 2000 VDC, 60 s Between terminals to enclosure : 2000 VAC 60 s
Insulation resistance (IR)	IR ≥ 15000 MΩ (20 °C, 100 VDC, 60 s), IR ≥ 2000 MΩ (20 °C, 500 VDC, 60 s)

* Use of this capacitor is limited to AC voltage (50 Hz or 60 Hz sine wave).

■Dimensions in mm (not to scale)

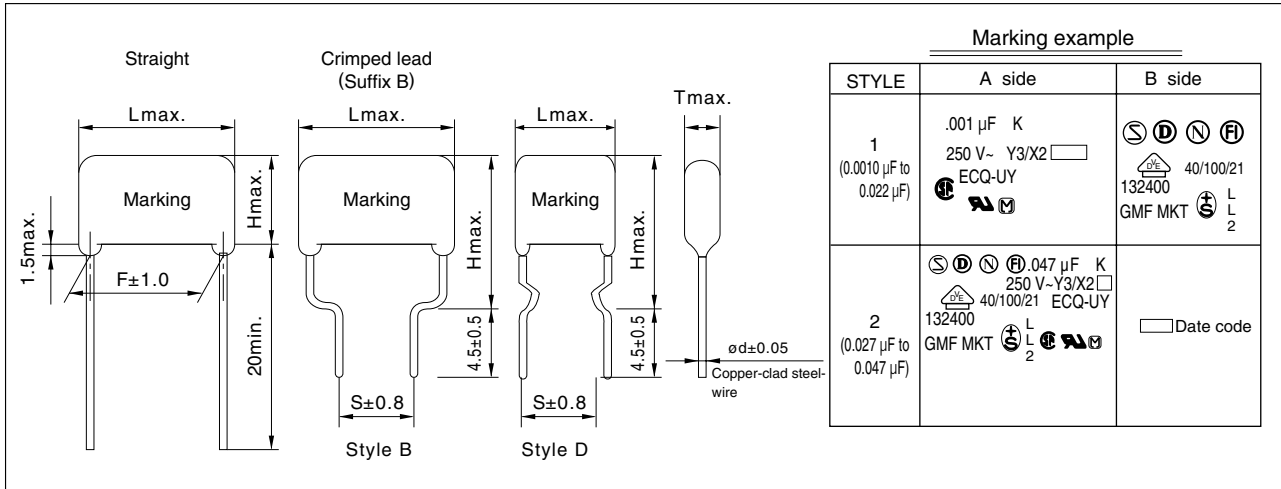

■Packaging Specifications for Bulk Package

Packing quantity: 100 pcs./bag

■Rating & Dimensions

● Capacitance tolerance : $\pm 10\%$ (K), $\pm 20\%$ (M)

Part No.	Cap. (μ F)	Dimensions (mm)						ϕ d
		Lmax.	Tmax.	H ^{max.}		F	S	
				Straight	Crimped lead			
ECQU2A102 □Y()	0.0010	12.0	6.0	11.5	16.5	10.0	7.5	0.60
ECQU2A122 □Y()	0.0012	12.0	6.0	11.5	16.5	10.0	7.5	0.60
ECQU2A152 □Y()	0.0015	12.0	6.5	11.5	16.5	10.0	7.5	0.60
ECQU2A182 □Y()	0.0018	12.0	6.5	11.5	16.5	10.0	7.5	0.60
ECQU2A222 □Y()	0.0022	12.0	6.5	11.5	16.5	10.0	7.5	0.60
ECQU2A272 □Y()	0.0027	12.0	6.5	11.5	16.5	10.0	7.5	0.60
ECQU2A332 □Y()	0.0033	12.0	7.0	12.0	17.0	10.0	7.5	0.60
ECQU2A392 □Y()	0.0039	12.0	7.0	12.5	17.5	10.0	7.5	0.60
ECQU2A472 □Y()	0.0047	12.0	7.5	13.5	18.5	10.0	7.5	0.60
ECQU2A562 □Y()	0.0056	12.0	8.5	14.0	19.0	10.0	7.5	0.60
ECQU2A682 □Y()	0.0068	18.5	7.5	13.0	18.0	15.0	7.5	0.80
ECQU2A822 □Y()	0.0082	18.5	7.5	13.5	18.5	15.0	7.5	0.80
ECQU2A103 □Y()	0.010	18.5	7.5	15.0	20.0	15.0	7.5	0.80
ECQU2A123 □Y()	0.012	18.5	8.5	15.5	20.5	15.0	7.5	0.80
ECQU2A153 □Y()	0.015	18.5	9.0	16.5	21.5	15.0	7.5	0.80
ECQU2A183 □Y()	0.018	18.5	10.0	17.5	22.5	15.0	7.5	0.80
ECQU2A223 □Y()	0.022	18.5	11.0	18.0	23.0	15.0	7.5	0.80
ECQU2A273 □Y()	0.027	23.5	9.5	16.5	21.5	20.0	15.0	0.80
ECQU2A333 □Y()	0.033	23.5	10.0	17.5	22.5	20.0	15.0	0.80
ECQU2A393 □Y()	0.039	23.5	11.0	18.5	23.5	20.0	15.0	0.80
ECQU2A473 □Y()	0.047	23.5	12.0	20.0	25.0	20.0	15.0	0.80

Suffix for lead crimped
 Cap. tol.code

Style D: 0.0010 μ F to 0.0056 μ F
 Style B: 0.0068 μ F to 0.047 μ F