


## DC Film Capacitor MKT Radial Potted Type

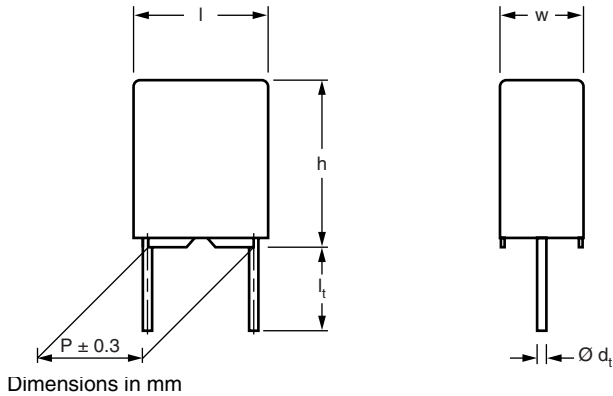

### APPLICATIONS

Blocking and coupling, bypass and energy reservoir, telecom, industrial, consumer

### REFERENCE STANDARDS

IEC 60384-2

### MARKING

C-value; tolerance; rated voltage; manufacturer's symbol; year and week of manufacturer; manufacturer's type

### DIELECTRIC

Polyester film

### ELECTRODES

Metallized

### CONSTRUCTION

Mono construction  
Series construction for 630 V 0.00068  $\mu$ F ~ 0.0018  $\mu$ F

### RATED (DC) VOLTAGE

Standard size: 63 V, 100 V, 250 V, 400 V  
Compact size: 100 V, 250 V, 400 V, 630 V

### RATED (AC) VOLTAGE

Standard size: 40 V, 63 V, 160 V, 220 V  
Compact size: 40 V, 63 V, 160 V, 220 V

### FEATURES

Available taped and loose in box  
RoHS compliant

### ENCAPSULATION

Flame retardant plastic case and epoxy resin  
(UL-class 94 V-0)

### CLIMATIC TESTING CLASS ACC. TO IEC 60068-1

55/100/56

### CAPACITANCE RANGE (E12 SERIES)

0.00068  $\mu$ F to 1.5  $\mu$ F

### CAPACITANCE TOLERANCE

$\pm 10\%$ ,  $\pm 5\%$

### LEADS

Tinned wire

### RATED TEMPERATURE

85 °C

### MAXIMUM APPLICATION TEMPERATURE

100 °C

### PERFORMANCE GRADE

Grade 1 (long life)

### DETAIL SPECIFICATION


For more detailed data and test requirements contact:  
[dc-film@vishay.com](mailto:dc-film@vishay.com)



**RoHS**  
COMPLIANT



## COMPOSITION OF CATALOG NUMBER

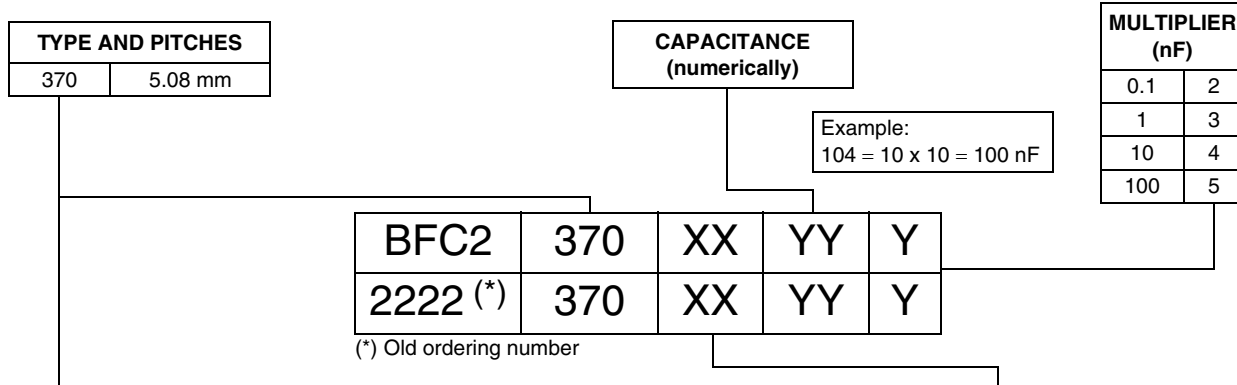

| TYPE                   | PACKAGING         | LEAD CONFIGURATION   | PREFERRED TYPES |      |       |       |       |
|------------------------|-------------------|--|-----------------|------|-------|-------|-------|
|                        |                   |  | C-TOL.          | 63 V | 100 V | 250 V | 400 V |
| 370<br>(standard size) | Loose in box      | Lead length 4.0 + 1.0/- 0.5 mm                                   | ± 10 %          | 11   | 21    | 41    | 51    |
|                        |                   |  | ± 5 %           | 12   | 22    | 42    | 52    |
|                        |                   | Lead length 26.0 ± 2.0 mm  | ± 10 %          | 15   | 25    | 45    | 55    |
|                        |                   |  | ± 5 %           | 16   | 26    | 46    | 56    |
|                        | Taped on reel (1) | H = 18.5 mm; P <sub>0</sub> = 12.7 mm;<br>Reel diameter = 356 mm | ± 10 %          | 18   | 28    | 48    | 58    |
|                        |                   |  | ± 5 %           | 19   | 29    | 49    | 59    |
|                        | Ammopack (1)      | H = 18.5 mm; P <sub>0</sub> = 12.7 mm                            | ± 10 %          | 75   | 85    | 35    | 65    |
|                        |                   |  | ± 5 %           | 76   | 86    | 36    | 66    |

| TYPE                  | PACKAGING         | LEAD CONFIGURATION   | PREFERRED TYPES |       |       |       |       |
|-----------------------|-------------------|--|-----------------|-------|-------|-------|-------|
|                       |                   |  | C-TOL.          | 100 V | 250 V | 400 V | 630 V |
| 370<br>(compact size) | Loose in box      | Lead length 4.0 + 1.0/- 0.5 mm                                   | ± 10 %          | CE    | EE    | FE    | GE    |
|                       |                   |  | ± 5 %           | CF    | EF    | FF    | GF    |
|                       |                   | Lead length 26.0 ± 2.0 mm  | ± 10 %          | CH    | EH    | FH    | GH    |
|                       |                   |  | ± 5 %           | CI    | EI    | FI    | GI    |
|                       | Taped on reel (1) | H = 18.5 mm; P <sub>0</sub> = 12.7 mm;<br>Reel diameter = 356 mm | ± 10 %          | CL    | EL    | FL    | GL    |
|                       |                   |  | ± 5 %           | CM    | EM    | FM    | GM    |
|                       | Ammopack (1)      | H = 18.5 mm; P <sub>0</sub> = 12.7 mm                            | ± 10 %          | CB    | EB    | FB    | GB    |
|                       |                   |  | ± 5 %           | CC    | EC    | FC    | GC    |

### Notes

(1) For detailed tape specifications refer to packaging information: [www.vishay.com/doc?28139](http://www.vishay.com/doc?28139) or end of catalog

(2) SPQ = Standard Packing Quantity

## SPECIFIC REFERENCE DATA (STANDARD SIZE)

| DESCRIPTION  | VALUE                   |                          |                          |              |
|--|-------------------------|--------------------------|--------------------------|--------------|
|  | at 1 kHz                | at 10 kHz                | at 100 kHz               |              |
| Tangent of loss angle:                                 |                         |                          |                          |              |
| C ≤ 0.1 μF   | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | ≤ 250 x 10 <sup>-4</sup> |              |
| 0.1 μF < C ≤ 0.47 μF                                   | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | ≤ 300 x 10 <sup>-4</sup> |              |
| 0.47 μF < C ≤ 1.5 μF                                   | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | -                        |              |
| Rated voltage pulse slope (dU/dt) <sub>R</sub> at      | 63 Vdc                  | 100 Vdc                  | 250 Vdc                  | 400 Vdc      |
|  | 60 V/μs                 | 110 V/μs                 | 330 V/μs                 | 630 V/μs     |
| R between leads, for C ≤ 0.33 μF                       |                         |                          |                          |              |
| at 10 V; 1 min   | > 15 000 MΩ             |                          |                          |              |
| at 100 V; 1 min  |                         | > 15 000 MΩ              | > 30 000 MΩ              | > 30 000 MΩ  |
| RC between leads                                       |                         |                          |                          |              |
| 0.33 μF < C ≤ 1.0 μF at 10 V; 1 min                    | > 5000 s                |                          |                          |              |
| C > 1.0 μF at 10 V; 1 min                              | > 1000 s                |                          |                          |              |
| C > 0.33 μF at 100 V; 1 min                            |                         | > 5000 s                 |                          |              |
| R between interconnecting leads and case (foil method) | > 30 000 MΩ             | > 30 000 MΩ              | > 30 000 MΩ              | > 30 000 MΩ  |
| Withstanding (DC) voltage (cut off current 10 mA);     | 100 V; 1 min            | 160 V; 1 min             | 400 V; 1 min             | 640 V; 1 min |
| Withstanding (DC) voltage between leads and case       | 200 V; 1 min            | 200 V; 1 min             | 500 V; 1 min             | 800 V; 1 min |
| Maximum application temperature                        | 100 °C                  |                          |                          |              |



DC Film Capacitor  
MKT Radial Potted Type

Vishay BCcomponents

**SPECIFIC REFERENCE DATA (COMPACT SIZE)**

| DESCRIPTION  | VALUE                   |                          |                          |               |
|--|-------------------------|--------------------------|--------------------------|---------------|
|  | at 1 kHz                | at 10 kHz                | at 100 kHz               |               |
| Tangent of loss angle:                                 |                         |                          |                          |               |
| C ≤ 0.1 μF   | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | ≤ 250 x 10 <sup>-4</sup> |               |
| 0.1 μF < C ≤ 0.47 μF                                   | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | ≤ 300 x 10 <sup>-4</sup> |               |
| C > 0.47 μF  | ≤ 75 x 10 <sup>-4</sup> | ≤ 130 x 10 <sup>-4</sup> | -                        |               |
| Rated voltage pulse slope (dU/dt) <sub>R</sub> at      | 100 Vdc                 | 250 Vdc                  | 400 Vdc                  | 630 Vdc       |
|  | 37 V/μs                 | 44 V/μs                  | 200 V/μs                 | 540 V/μs      |
| R between leads, for C ≤ 0.33 μF<br>at 100 V; 1 min    | > 15 000 MΩ             | > 30 000 MΩ              | > 30 000 MΩ              | > 30 000 MΩ   |
| RC between leads<br>C > 0.33 μF at 100 V; 1 min        | > 5000 s                |                          |                          |               |
| R between interconnecting leads and case (foil method) | > 30 000 MΩ             | > 30 000 MΩ              | > 30 000 MΩ              | > 30 000 MΩ   |
| Withstanding (DC) voltage (cut off current 10 mA);     | 160 V; 1 min            | 400 V; 1 min             | 640 V; 1 min             | 1008 V; 1 min |
| Withstanding (DC) voltage between leads and case       | 200 V; 1 min            | 500 V; 1 min             | 800 V; 1 min             | 1260 V; 1 min |
| Maximum application temperature                        | 100 °C                  |                          |                          |               |

U<sub>Rdc</sub> = 63 V; U<sub>Rac</sub> = 40 V

| C<br>(μF)   | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XXYYY AND PACKAGING |                   |                    |                   |                    |                   |                    |                   | C-VALUE<br><br>..YYY |
|---|---------------------------------|----------------------------|---|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|----------------------|
|   |                                 |                            | AMMOPACK                                    |                   | LOOSE IN BOX       |                   |                    |                   | REEL               |                   |                      |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                   | Short leads        |                   | Long leads         |                   |                    |                   |                      |
|   |                                 |                            | C-tol. =<br>± 10 %                          | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % |                      |
|   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |                      |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       |                      |
| <b>Pitch = 5.08 ± 0.30 mm; d<sub>t</sub> = 0.50 ± 0.05 mm</b> |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |                      |
| 0.056   | 2.5 x 6.5 x 7.2                 | 0.18                       |   |                   |                    |                   |                    |                   |                    |                   | 563                  |
| 0.068   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 683                  |
| 0.082   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 823                  |
| 0.1   |                                 |                            | 75...<br>(2000)                             | 76...<br>(2000)   | 11...<br>(2000)    | 12...<br>(2000)   | 15...<br>(1000)    | 16...<br>(1000)   | 18...<br>(2000)    | 19...<br>(2000)   | 104                  |
| 0.12  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 124                  |
| 0.15  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 154                  |
| 0.18  |                                 |                            |   |                   |                    |                   |                    |                   | 184                |                   |                      |
| 0.22  | 3.5 x 8.0 x 7.2                 | 0.3                        |   |                   |                    |                   |                    |                   |                    |                   | 224                  |
| 0.27  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 274                  |
| 0.33  |                                 |                            | 75...<br>(1500)                             | 76...<br>(1500)   | 11...<br>(2000)    | 12...<br>(2000)   | 15...<br>(1000)    | 16...<br>(1000)   | 18...<br>(1500)    | 19...<br>(1500)   | 334                  |
| 0.39  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 394                  |
| 0.47  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 474                  |
| 0.56  | 4.5 x 9.0 x 7.2                 | 0.42                       |   |                   |                    |                   |                    |                   |                    |                   | 564                  |
| 0.68  |                                 |                            | 75...<br>(1000)                             | 76...<br>(1000)   | 11...<br>(2000)    | 12...<br>(2000)   | 15...<br>(1000)    | 16...<br>(1000)   | 18...<br>(1000)    | 19...<br>(1000)   | 684                  |
| 0.82  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 824                  |
| 1.0   | 6.0 x 11.0 x 7.2                | 0.64                       | 75...<br>(750)                              | 76...<br>(750)    | 11...<br>(2000)    | 12...<br>(2000)   | 15...<br>(1000)    | 16...<br>(1000)   | 18...<br>(1000)    | 19...<br>(1000)   | 105                  |

**Note**

<sup>(1)</sup> Weight for short lead products only

$U_{Rdc} = 100\text{ V}$ ;  $U_{Rac} = 63\text{ V}$  (standard size)

| C<br>( $\mu\text{F}$ )  | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XYYYY AND PACKAGING |                       |                        |                       |                        |                       |                        |                       | C-VALUE<br>..YYY |                 |     |
|---|---------------------------------|----------------------------|---|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------|-----------------|-----|
|   |                                 |                            | AMMOPACK                                    |                       | LOOSE IN BOX           |                       |                        |                       | REEL                   |                       |                  |                 |     |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                       | Short leads            |                       | Long leads             |                       |                        |                       |                  |                 |     |
|   |                                 |                            | C-tol. =<br>$\pm 10\%$                      | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ |                  |                 |     |
|   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 |     |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)      |                 |     |
| <b>Pitch = 5.08 <math>\pm</math> 0.30 mm; d<sub>t</sub> = 0.50 <math>\pm</math> 0.05 mm</b> |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 |     |
| 0.001   | 2.5 x 6.5 x 7.2                 | 0.18                       |   |                       |                        |                       |                        |                       |                        |                       | 102              |                 |     |
| 0.0012  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 122             |     |
| 0.0015  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 152             |     |
| 0.0018  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 182             |     |
| 0.0022  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 222             |     |
| 0.0027  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 272             |     |
| 0.0033  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 332             |     |
| 0.0039  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 392             |     |
| 0.0047  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 472             |     |
| 0.0056  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 562             |     |
| 0.0068  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 682             |     |
| 0.0082  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 822             |     |
| 0.010   |                                 |                            |   |                       | 85...<br>(2000)        | 86...<br>(2000)       | 21...<br>(2000)        | 22...<br>(2000)       | 25...<br>(1000)        | 26...<br>(1000)       | 28...<br>(2000)  | 29...<br>(2000) | 103 |
| 0.012   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 | 123 |
| 0.015   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 | 153 |
| 0.018   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 | 183 |
| 0.022   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |                 | 223 |
| 0.027   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 273              |                 |     |
| 0.033   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 333              |                 |     |
| 0.039   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 393              |                 |     |
| 0.047   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 473              |                 |     |
| 0.056   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 563              |                 |     |
| 0.068   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 683              |                 |     |
| 0.082   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 823              |                 |     |
| 0.10  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 104              |                 |     |
| 0.12  | 3.5 x 8.0 x 7.2                 | 0.30                       |   |                       |                        |                       |                        |                       |                        |                       | 124              |                 |     |
| 0.15  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 154              |                 |     |
| 0.18  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 184             |     |
| 0.22  | 4.5 x 9.0 x 7.2                 | 0.42                       |   |                       |                        |                       |                        |                       |                        |                       | 224              |                 |     |
| 0.27  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 274              |                 |     |
| 0.33  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 334             |     |
| 0.39  | 6.0 x 11.0 x 7.2                | 0.64                       |   |                       |                        |                       |                        |                       |                        |                       | 394              |                 |     |
| 0.47  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 474             |     |

**Note**

<sup>(1)</sup> Weight for short lead products only



DC Film Capacitor  
MKT Radial Potted Type

Vishay BCcomponents

$U_{Rdc} = 100\text{ V}$ ;  $U_{Rac} = 40\text{ V}$  (compact size)

| C<br>( $\mu\text{F}$ )  | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XXYYY AND PACKAGING |                       |                        |                       |                        |                       |                        |                       | C-VALUE<br>..YYY |     |
|---|---------------------------------|----------------------------|---|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------|-----|
|   |                                 |                            | AMMOPACK                                    |                       | LOOSE IN BOX           |                       |                        |                       | REEL                   |                       |                  |     |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                       | Short leads            |                       | Long leads             |                       |                        |                       |                  |     |
|   |                                 |                            | C-tol. =<br>$\pm 10\%$                      | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ |                  |     |
|   |                                 | XX<br>(SPQ)                | XX<br>(SPQ)                                 | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            |                       |                  |     |
| Pitch = 5.08 $\pm$ 0.30 mm; d <sub>t</sub> = 0.50 $\pm$ 0.05 mm |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |     |
| 0.12  | 3.5 x 8.0 x 7.2                 | 0.30                       |   |                       |                        |                       |                        |                       |                        |                       |                  | 124 |
| 0.15  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 154 |
| 0.18  |                                 |                            | CB...                                       | CC...                 | CE...                  | CF...                 | CH...                  | CI...                 | CL...                  | CM...                 | 184              |     |
| 0.22  |                                 |                            | (1500)                                      | (1500)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1500)                 | (1500)                | 224              |     |
| 0.27  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 274              |     |
| 0.33  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 334              |     |
| 0.39  | 4.5 x 9.0 x 7.2                 | 0.42                       | CB...                                       | CC...                 | CE...                  | CF...                 | CH...                  | CI...                 | CL...                  | CM...                 | 394              |     |
| 0.47  |                                 |                            | (1000)                                      | (1000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 474              |     |
| 0.56  | 6.0 x 11.0 x 7.2                | 0.64                       | CB...                                       | CC...                 | CE...                  | CF...                 | CH...                  | CI...                 | CL...                  | CM...                 | 564              |     |
|   |                                 |                            | (750)                                       | (750)                 | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                |                  |     |

**Note**

<sup>(1)</sup> Weight for short lead products only

$U_{Rdc} = 250\text{ V}$ ;  $U_{Rac} = 160\text{ V}$  (standard size)

| C<br>( $\mu\text{F}$ )  | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XXYYY AND PACKAGING |                       |                        |                       |                        |                       |                        |                       | C-VALUE<br>..YYY |        |     |
|---|---------------------------------|----------------------------|---|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------|--------|-----|
|   |                                 |                            | AMMOPACK                                    |                       | LOOSE IN BOX           |                       |                        |                       | REEL                   |                       |                  |        |     |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                       | Short leads            |                       | Long leads             |                       |                        |                       |                  |        |     |
|   |                                 |                            | C-tol. =<br>$\pm 10\%$                      | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ |                  |        |     |
|   |                                 | XX<br>(SPQ)                | XX<br>(SPQ)                                 | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            |                       |                  |        |     |
| Pitch = 5.08 $\pm$ 0.30 mm; d <sub>t</sub> = 0.50 $\pm$ 0.05 mm |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        |     |
| 0.001   | 2.5 x 6.5 x 7.2                 | 0.18                       |   |                       |                        |                       |                        |                       |                        |                       |                  | 102    |     |
| 0.0012  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 122    |     |
| 0.0015  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 152    |     |
| 0.0018  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 182    |     |
| 0.0022  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 222    |     |
| 0.0027  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 272    |     |
| 0.0033  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 332    |     |
| 0.0039  |                                 |                            |   |                       | 35...                  | 36...                 | 41...                  | 42...                 | 45...                  | 46...                 | 48...            | 49...  | 392 |
| 0.0047  |                                 |                            |   |                       | (2000)                 | (2000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (2000)           | (2000) | 472 |
| 0.0056  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 562 |
| 0.0068  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 682 |
| 0.0082  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 822 |
| 0.010   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 103 |
| 0.012   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 123 |
| 0.015   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 153 |
| 0.018   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        | 183 |
| 0.022   | 3.5 x 8.0 x 7.2                 | 0.30                       | 35...                                       | 36...                 | 41...                  | 42...                 | 45...                  | 46...                 | 48...                  | 49...                 | 223              |        |     |
| 0.027   |                                 |                            | (1500)                                      | (1500)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1500)                 | (1500)                | 273              |        |     |
| 0.033   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 333    |     |
| 0.039   | 4.5 x 9.0 x 7.2                 | 0.42                       | 35...                                       | 36...                 | 41...                  | 42...                 | 45...                  | 46...                 | 48...                  | 49...                 | 393              |        |     |
| 0.047   |                                 |                            | (1000)                                      | (1000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 473              |        |     |
| 0.056   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 563    |     |
| 0.068   | 6.0 x 11.0 x 7.2                | 0.64                       | 35...                                       | 36...                 | 41...                  | 42...                 | 45...                  | 46...                 | 48...                  | 49...                 | 683              |        |     |
| 0.082   |                                 |                            | (750)                                       | (750)                 | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 823              |        |     |
| 0.10  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  | 104    |     |

**Note**

<sup>(1)</sup> Weight for short lead products only

$U_{Rdc} = 250\text{ V}$ ;  $U_{Rac} = 63\text{ V}$  (compact size)

| C<br>( $\mu\text{F}$ )  | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XXYYY AND PACKAGING |                       |                        |                       |                        |                       |                        |                       | C-VALUE<br>..YYY |
|---|---------------------------------|----------------------------|---|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------|
|   |                                 |                            | AMMOPACK                                    |                       | LOOSE IN BOX           |                       |                        |                       | REEL                   |                       |                  |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                       | Short leads            |                       | Long leads             |                       |                        |                       |                  |
|   |                                 |                            | C-tol. =<br>$\pm 10\%$                      | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ |                  |
|   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)      |
| <b>Pitch = 5.08 <math>\pm</math> 0.30 mm; d<sub>t</sub> = 0.50 <math>\pm</math> 0.05 mm</b> |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |
| 0.022   | 2.5 x 6.5 x 7.2                 | 0.18                       | EB...                                       | EC...                 | EE...                  | EF...                 | EH...                  | EI...                 | EL...                  | EM...                 | 223              |
| 0.027   |                                 |                            | (2000)                                      | (2000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (2000)                 | (2000)                | 273              |
| 0.033   | 3.5 x 8.0 x 7.2                 | 0.30                       |   |                       |                        |                       |                        |                       |                        |                       | 333              |
| 0.039   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 393              |
| 0.047   |                                 |                            | EB...                                       | EC...                 | EE...                  | EF...                 | EH...                  | EI...                 | EL...                  | EM...                 | 473              |
| 0.056   |                                 |                            | (1500)                                      | (1500)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1500)                 | (1500)                | 563              |
| 0.068   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 683              |
| 0.082   | 4.5 x 9.0 x 7.2                 | 0.42                       | EB...                                       | EC...                 | EE...                  | EF...                 | EH...                  | EI...                 | EL...                  | EM...                 | 823              |
| 0.10  |                                 |                            | (1000)                                      | (1000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 104              |
| 0.12  | 6.0 x 11.0 x 7.2                | 0.64                       |   |                       |                        |                       |                        |                       |                        |                       | 124              |
| 0.15  |                                 |                            | EB...                                       | EC...                 | EE...                  | EF...                 | EH...                  | EI...                 | EL...                  | EM...                 | 154              |
| 0.18  |                                 |                            | (750)                                       | (750)                 | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 184              |
| 0.22  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 224              |

**Note**

<sup>(1)</sup> Weight for short lead products only

$U_{Rdc} = 400\text{ V}$ ;  $U_{Rac} = 220\text{ V}$  (standard size)

| C<br>( $\mu\text{F}$ )  | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XXYYY AND PACKAGING |                       |                        |                       |                        |                       |                        |                       | C-VALUE<br>..YYY |        |     |
|---|---------------------------------|----------------------------|---|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------------|-----------------------|------------------|--------|-----|
|   |                                 |                            | AMMOPACK                                    |                       | LOOSE IN BOX           |                       |                        |                       | REEL                   |                       |                  |        |     |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                       | Short leads            |                       | Long leads             |                       |                        |                       |                  |        |     |
|   |                                 |                            | C-tol. =<br>$\pm 10\%$                      | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ | C-tol. =<br>$\pm 10\%$ | C-tol. =<br>$\pm 5\%$ |                  |        |     |
|   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        |     |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)            | XX<br>(SPQ)           | XX<br>(SPQ)      |        |     |
| <b>Pitch = 5.08 <math>\pm</math> 0.30 mm; d<sub>t</sub> = 0.50 <math>\pm</math> 0.05 mm</b> |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       |                  |        |     |
| 0.001   | 2.5 x 6.5 x 7.2                 | 0.18                       |   |                       |                        |                       |                        |                       |                        |                       | 102              |        |     |
| 0.0012  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 122              |        |     |
| 0.0015  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 152              |        |     |
| 0.0018  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 182              |        |     |
| 0.0022  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 222              |        |     |
| 0.0027  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 272              |        |     |
| 0.0033  |                                 |                            | 65...                                       | 66...                 | 51...                  | 52...                 | 55...                  | 56...                 | 58...                  | 59...                 | 332              |        |     |
| 0.0039  |                                 |                            | (2000)                                      | (2000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (2000)                 | (2000)                | 392              |        |     |
| 0.0047  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 472              |        |     |
| 0.0056  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 562              |        |     |
| 0.0068  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 682              |        |     |
| 0.0082  |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 822              |        |     |
| 0.010   |                                 |                            | 3.5 x 8.0 x 7.2                             | 0.30                  | 65...                  | 66...                 | 51...                  | 52...                 | 55...                  | 56...                 | 58...            | 59...  | 103 |
| 0.012   |                                 |                            |   |                       | (1500)                 | (1500)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1500)           | (1500) | 123 |
| 0.015   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 153              |        |     |
| 0.018   | 4.5 x 9.0 x 7.2                 | 0.42                       | 65...                                       | 66...                 | 51...                  | 52...                 | 55...                  | 56...                 | 58...                  | 59...                 | 183              |        |     |
| 0.022   |                                 |                            | (1000)                                      | (1000)                | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 223              |        |     |
| 0.027   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 273              |        |     |
| 0.033   | 6.0 x 11.0 x 7.2                | 0.64                       | 65...                                       | 66...                 | 51...                  | 52...                 | 55...                  | 56...                 | 58...                  | 59...                 | 333              |        |     |
| 0.039   |                                 |                            | (750)                                       | (750)                 | (2000)                 | (2000)                | (1000)                 | (1000)                | (1000)                 | (1000)                | 393              |        |     |
| 0.047   |                                 |                            |   |                       |                        |                       |                        |                       |                        |                       | 473              |        |     |

**Note**

<sup>(1)</sup> Weight for short lead products only



DC Film Capacitor  
MKT Radial Potted Type

Vishay BCcomponents

U<sub>Rdc</sub> = 400 V; U<sub>Rac</sub> = 160 V (compact size)

| C<br>(µF)   | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XYYYY AND PACKAGING |                   |                    |                   |                    |                   |                    |                   |             | C-VALUE<br>..YYY |
|---|---------------------------------|----------------------------|---|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|-------------|------------------|
|   |                                 |                            | AMMOPACK                                    |                   | LOOSE IN BOX       |                   |                    |                   | REEL               |                   |             |                  |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                   | Short leads        |                   | Long leads         |                   |                    |                   |             |                  |
|   |                                 |                            | C-tol. =<br>± 10 %                          | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % |             |                  |
|   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ) |                  |
| <b>Pitch = 5.08 ± 0.30 mm; d<sub>t</sub> = 0.50 ± 0.05 mm</b> |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  |
| 0.01  | 2.5 x 6.5 x 7.2                 | 0.18                       |   |                   |                    |                   |                    |                   |                    |                   |             | 103              |
| 0.012   |                                 |                            | FB...                                       | FC...             | FE...              | FF...             | FH...              | FI...             | FL...              | FM...             | 123         |                  |
| 0.015   |                                 |                            | (2000)                                      | (2000)            | (2000)             | (2000)            | (1000)             | (1000)            | (2000)             | (2000)            | 153         |                  |
| 0.018   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 183         |                  |
| 0.022   | 3.5 x 8.0 x 7.2                 | 0.30                       |   |                   |                    |                   |                    |                   |                    |                   |             | 223              |
| 0.027   |                                 |                            | FB...                                       | FC...             | FE...              | FF...             | FH...              | FI...             | FL...              | FM...             | 273         |                  |
| 0.033   |                                 |                            | (1500)                                      | (1500)            | (2000)             | (2000)            | (1000)             | (1000)            | (1500)             | (1500)            | 333         |                  |
| 0.039   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 393         |                  |
| 0.047   | 4.5 x 9.0 x 7.2                 | 0.42                       |   |                   |                    |                   |                    |                   |                    |                   |             | 473              |
| 0.056   |                                 |                            | FB...                                       | FC...             | FE...              | FF...             | FH...              | FI...             | FL...              | FM...             | 563         |                  |
| 0.068   | 6.0 x 11.0 x 7.2                | 0.64                       |   |                   |                    |                   |                    |                   |                    |                   |             | 683              |
| 0.082   |                                 |                            | FB...                                       | FC...             | FE...              | FF...             | FH...              | FI...             | FL...              | FM...             | 823         |                  |
| 0.10  |                                 |                            | (750)                                       | (750)             | (2000)             | (2000)            | (1000)             | (1000)            | (1000)             | (1000)            | 104         |                  |

**Note**

<sup>(1)</sup> Weight for short lead products only

U<sub>Rdc</sub> = 630 V; U<sub>Rac</sub> = 220 V (compact size)

| C<br>(µF)   | DIMENSIONS<br>w x h x l<br>(mm) | MASS<br>(g) <sup>(1)</sup> | CATALOG NUMBER BFC2 370 XYYYY AND PACKAGING |                   |                    |                   |                    |                   |                    |                   |             | C-VALUE<br>..YYY |     |
|---|---------------------------------|----------------------------|---|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|-------------|------------------|-----|
|   |                                 |                            | AMMOPACK                                    |                   | LOOSE IN BOX       |                   |                    |                   | REEL               |                   |             |                  |     |
|   |                                 |                            | H = 18.5 mm;<br>P <sub>0</sub> = 12.7 mm    |                   | Short leads        |                   | Long leads         |                   |                    |                   |             |                  |     |
|   |                                 |                            | C-tol. =<br>± 10 %                          | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % | C-tol. =<br>± 10 % | C-tol. =<br>± 5 % |             |                  |     |
|   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  |     |
|   |                                 |                            | XX<br>(SPQ)                                 | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ)        | XX<br>(SPQ)       | XX<br>(SPQ) |                  |     |
| <b>Pitch = 5.08 ± 0.30 mm; d<sub>t</sub> = 0.50 ± 0.05 mm</b> |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  |     |
| 0.00068   | 3.5 x 8.0 x 7.2                 | 0.35                       |   |                   |                    |                   |                    |                   |                    |                   |             | 681              |     |
| 0.00082   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 821 |
| 0.001   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 102 |
| 0.0012  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 122 |
| 0.0015  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 152 |
| 0.0018  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 182 |
| 0.002   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 202 |
| 0.0022  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 222 |
| 0.0024  |                                 |                            |   |                   | GB...              | GC...             | GE...              | GF...             | GH...              | GI...             | GL...       | GM...            | 242 |
| 0.0027  |                                 |                            |   |                   | (1500)             | (1500)            | (2000)             | (2000)            | (1000)             | (1000)            | (1500)      | (1500)           | 272 |
| 0.0033  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 332 |
| 0.0039  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 392 |
| 0.0047  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 472 |
| 0.0056  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 562 |
| 0.0068  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 682 |
| 0.0082  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   |             |                  | 822 |
| 0.01  |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 103         |                  |     |
| 0.012   | 4.5 x 9.0 x 7.2                 | 0.45                       |   |                   |                    |                   |                    |                   |                    |                   |             | 123              |     |
| 0.015   |                                 |                            | GB...                                       | GC...             | GE...              | GF...             | GH...              | GI...             | GL...              | GM...             | 153         |                  |     |
| 0.018   | 6.0 x 11.0 x 7.2                | 0.65                       |   |                   |                    |                   |                    |                   |                    |                   |             | 183              |     |
| 0.022   |                                 |                            | GB...                                       | GC...             | GE...              | GF...             | GH...              | GI...             | GL...              | GM...             | 223         |                  |     |
| 0.027   |                                 |                            | (750)                                       | (750)             | (2000)             | (2000)            | (1000)             | (1000)            | (1000)             | (1000)            | 273         |                  |     |
| 0.033   |                                 |                            |   |                   |                    |                   |                    |                   |                    |                   | 333         |                  |     |

**Note**

<sup>(1)</sup> Weight for short lead products only

## MOUNTING

### Normal Use

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting in printed-circuit boards by means of automatic insertion machines.

For detailed tape specifications refer to packaging information: [www.vishay.com/doc?28139](http://www.vishay.com/doc?28139) or end of catalog.

### Specific Method of Mounting to Withstand Vibration and Shock


In order to withstand vibration and shock tests, it must be ensured that stand-off pips are in good contact with the printed-circuit board:

- For pitches  $\leq 15$  mm capacitors shall be mechanically fixed by the leads
- For larger pitches the capacitors shall be mounted in the same way and the body clamped

### Space Requirements On Printed-Circuit Board

The maximum length and width of film capacitors is shown in the drawing:

- Eccentricity as in drawing. The maximum eccentricity is smaller than or equal to the lead diameter of the product concerned.
- Product height with seating plane as given by "IEC 60717" as reference:  $h_{\max.} \leq h + 0.3$  mm

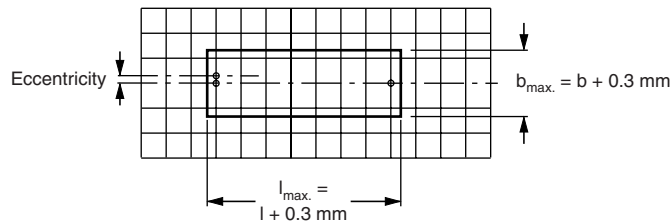

### Storage Temperature

- Storage temperature:  $T_{\text{stg}} = -25$  °C to  $+40$  °C with RH maximum 80 % without condensation

### Ratings and Characteristics Reference Conditions

Unless otherwise specified, all electrical values apply to an ambient temperature of  $23 \pm 1$  °C, an atmospheric pressure of 86 kPa to 106 kPa and a relative humidity of  $50 \pm 2$  %.


For reference testing, a conditioning period shall be applied over  $96 \pm 4$  h by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20 %.






CHARACTERISTICS


Capacitance as a function of frequency (typical curve)

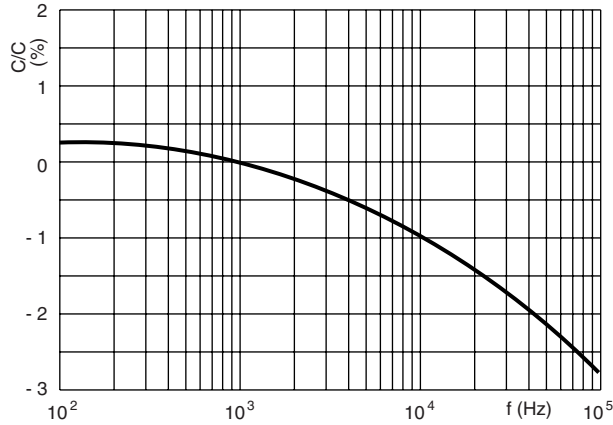


Capacitance as a function of temperature (typical curve)

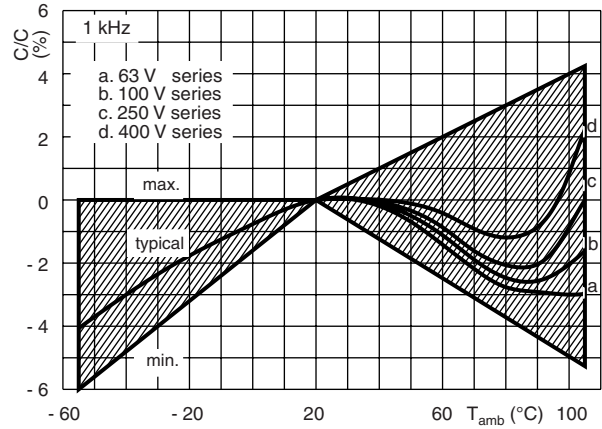


Max. DC and AC voltage as a function of temperature

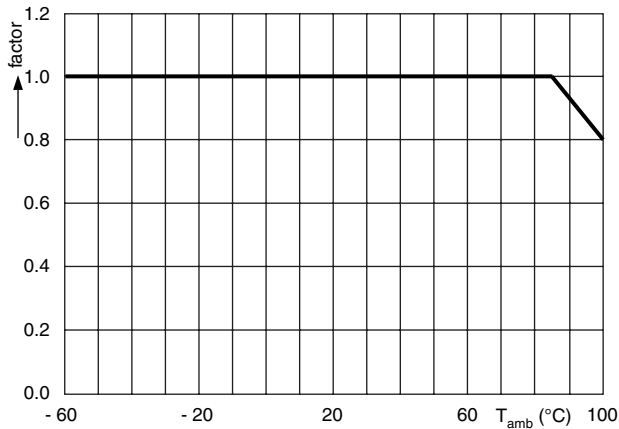


Impedance as a function of frequency

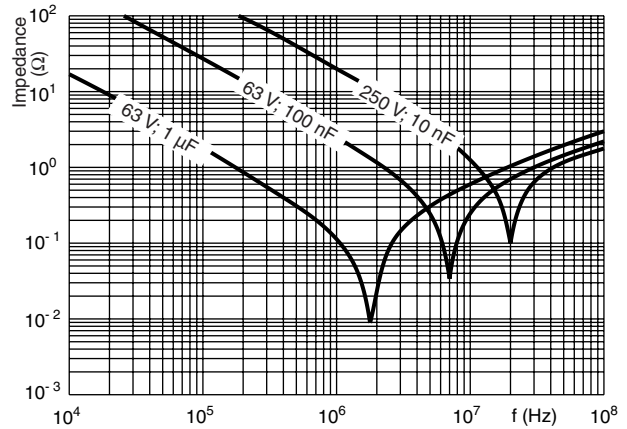


Max. AC voltage as a function of frequency

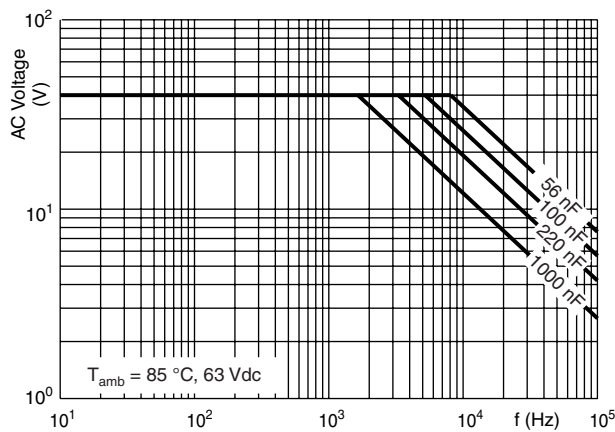


Max. AC voltage as a function of frequency

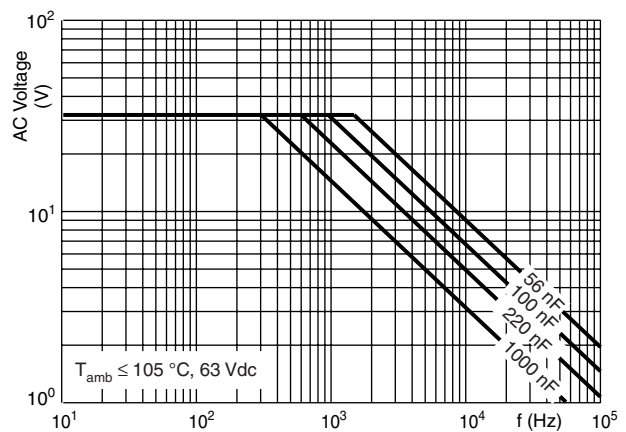


Max. AC voltage as a function of frequency

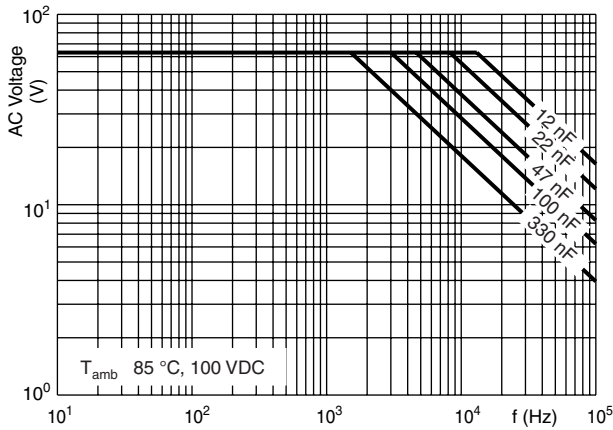


Max. AC voltage as a function of frequency

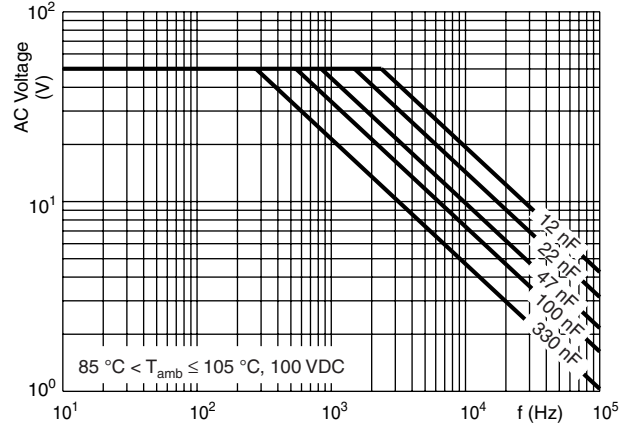


Max. AC voltage as a function of frequency

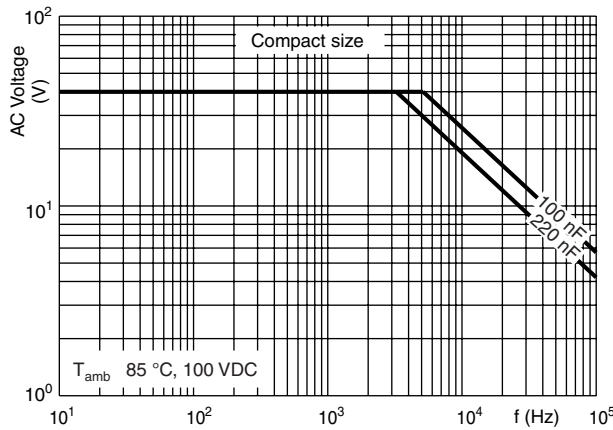


Max. AC voltage as a function of frequency

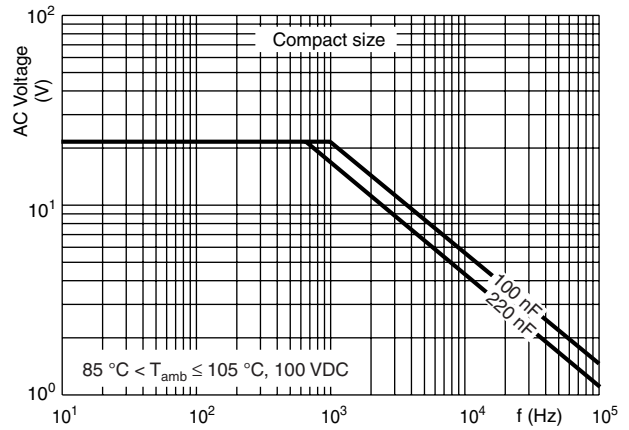

Max. AC voltage as a function of frequency

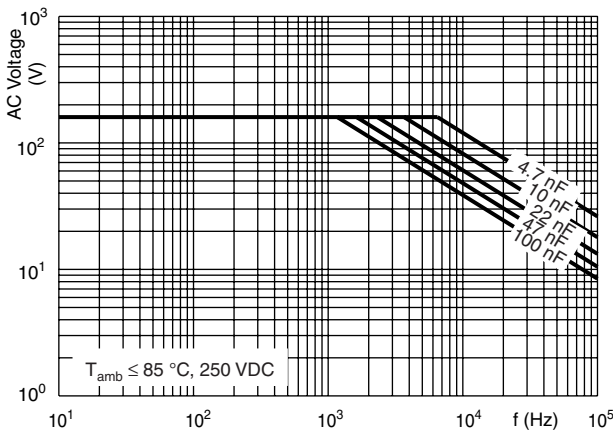


Max. AC voltage as a function of frequency

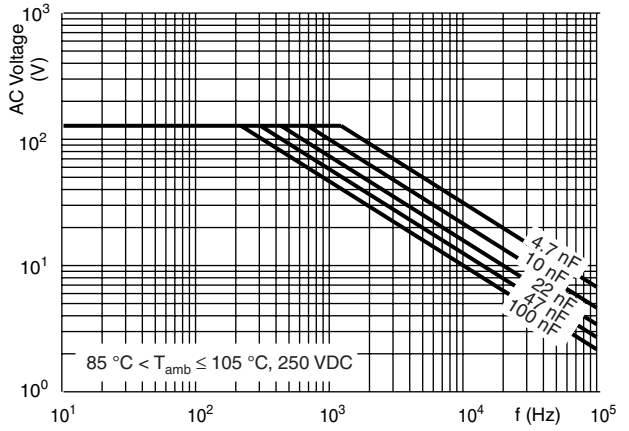


# DC Film Capacitor MKT Radial Potted Type

Vishay BCcomponents


Max. AC voltage as a function of frequency

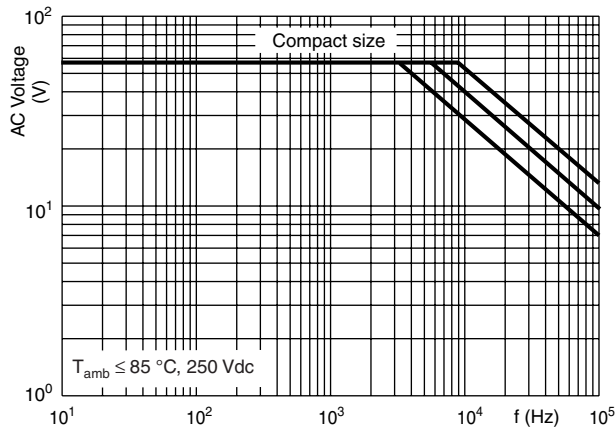


Max. AC voltage as a function of frequency

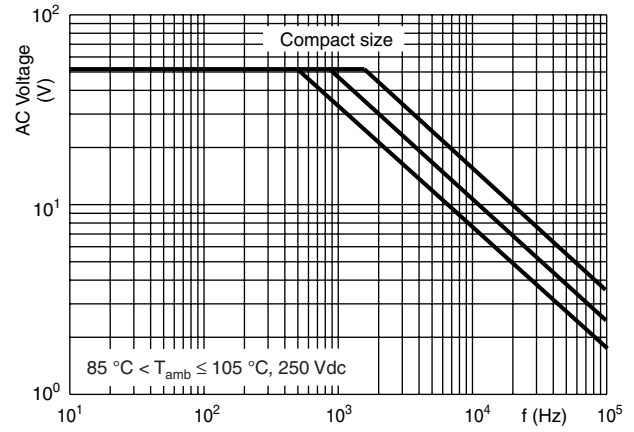


Max. AC voltage as a function of frequency

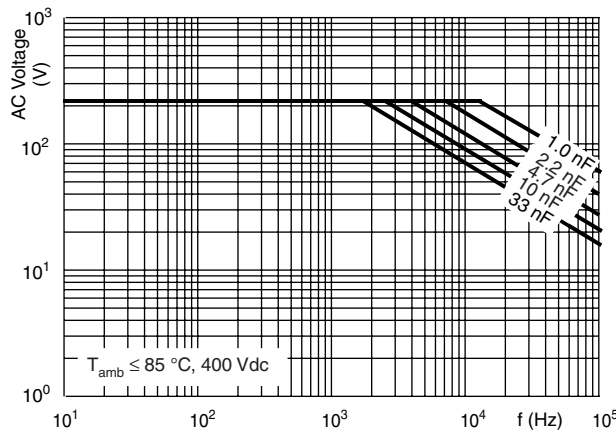


Max. AC voltage as a function of frequency

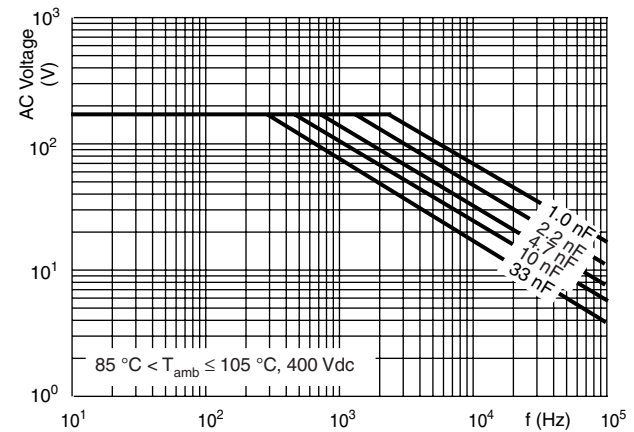


Max. AC voltage as a function of frequency

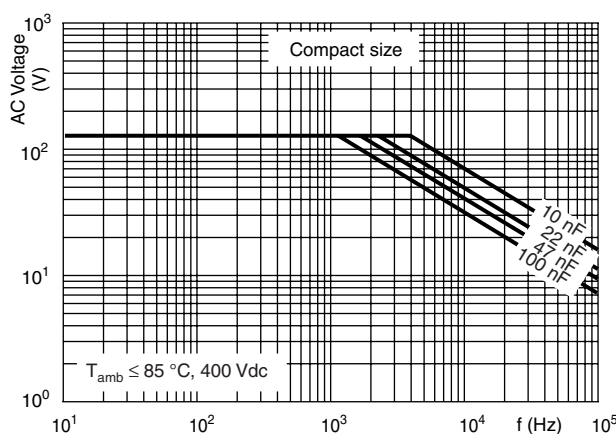


Max. AC voltage as a function of frequency

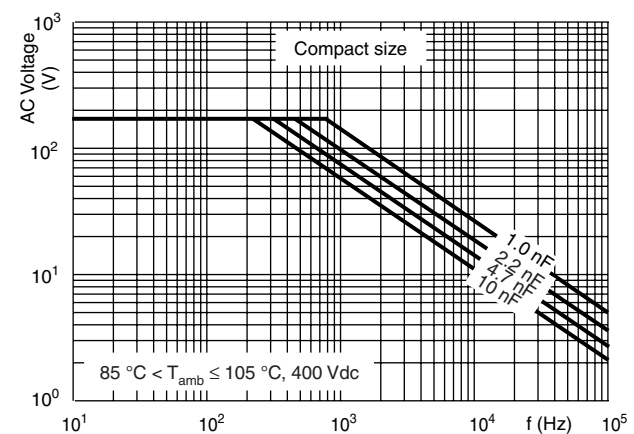

Max. AC voltage as a function of frequency

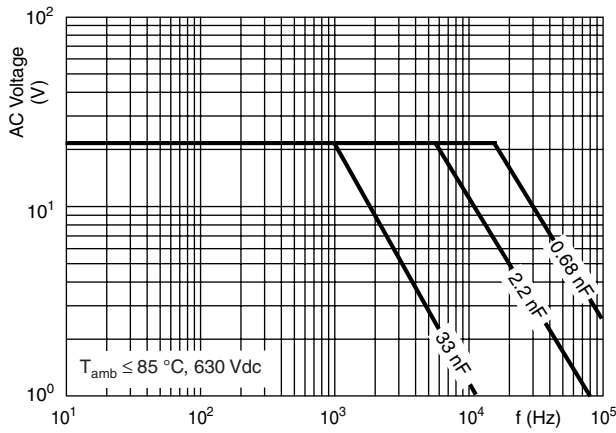

Max. AC voltage as a function of frequency

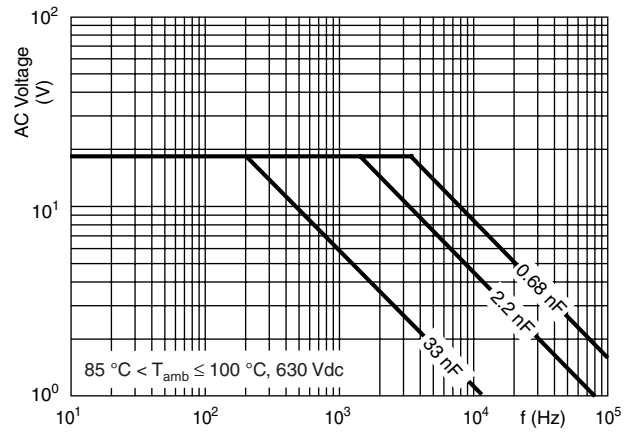


**Maximum RMS current (sinewave) as a function of frequency**


The maximum RMS current is defined by  $I_{ac} = \omega \times C \times U_{ac}$ .

$U_{ac}$  is the maximum AC voltage depending on the ambient temperature in the curves "Max. RMS voltage and AC current as a function of frequency".


Tangent of loss angle as a function of frequency (typical curve)

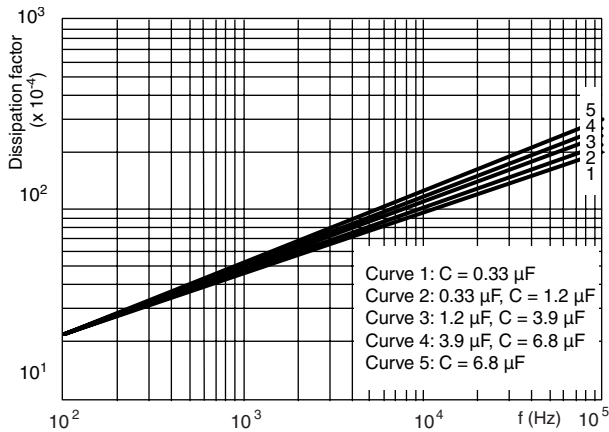

Insulation resistance as a function of the ambient temperature (typical curve)

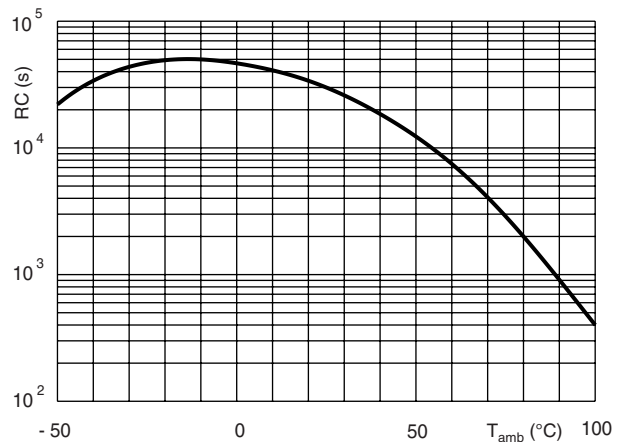

Maximum allowed component temperature rise ( $\Delta T$ ) as a function of the ambient temperature ( $T_{amb}$ )

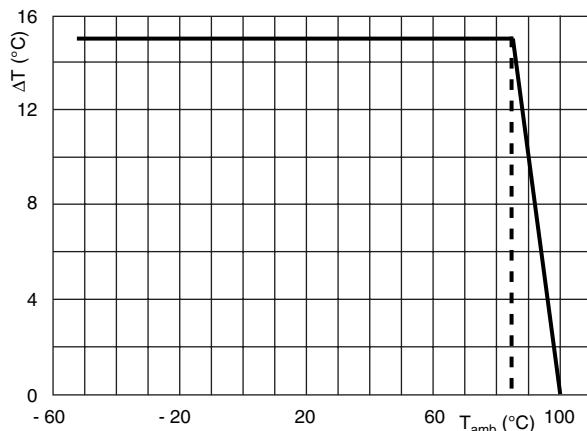

**HEAT CONDUCTIVITY (G) AS A FUNCTION OF (ORIGINAL) PITCH AND CAPACITOR BODY THICKNESS IN mW/°C**

| W <sub>max.</sub><br>(mm) | HEAT CONDUCTIVITY (mW/°C) |  |
|---------------------------|---------------------------|--|
|                           | PITCH 5 mm                |  |
| 2.5                       | 2.5                       |  |
| 3.5                       | 3.0                       |  |
| 4.5                       | 4.0                       |  |
| 6.0                       | 5.5                       |  |

**POWER DISSIPATION AND MAXIMUM COMPONENT TEMPERATURE RISE**

The power dissipation must be limited in order not to exceed the maximum allowed component temperature rise as a function of the free ambient temperature.


The power dissipation can be calculated according type detail specification "HQN-384-01/101: Technical Information Film Capacitors".

The component temperature rise ( $\Delta T$ ) can be measured (see section "Measuring the component temperature" for more details) or calculated by  $\Delta T = P/G$ :

- $\Delta T$  = Component temperature rise (°C)
- P = Power dissipation of the component (mW)
- G = Heat conductivity of the component (mW/°C)

**MEASURING THE COMPONENT TEMPERATURE**

A thermocouple must be attached to the capacitor body as in:

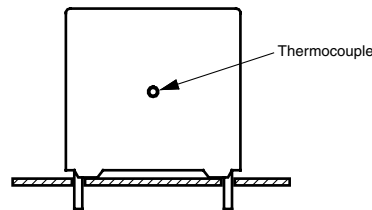

The temperature is measured in unloaded ( $T_{amb}$ ) and maximum loaded condition ( $T_C$ ).

The temperature rise is given by  $\Delta T = T_C - T_{amb}$ .

To avoid radiation or convection, the capacitor should be tested in a wind-free box.

**APPLICATION NOTE AND LIMITING CONDITIONS**

These capacitors are not suitable for mains applications as across-the-line capacitors without additional protection, as described hereunder. These mains applications are strictly regulated in safety standards and therefore electromagnetic interference suppression capacitors conforming the standards must be used.

To select the capacitor for a certain application, the following conditions must be checked:

1. The peak voltage ( $U_P$ ) shall not be greater than the rated DC voltage ( $U_{Rdc}$ )
2. The peak-to-peak voltage ( $U_{P-P}$ ) shall not be greater than  $2\sqrt{2} \times U_{Rac}$  to avoid the ionisation inception level
3. The voltage peak slope ( $dU/dt$ ) shall not exceed the rated voltage pulse slope in an RC-circuit at rated voltage and without ringing. If the pulse voltage is lower than the rated DC voltage, the rated voltage pulse slope may be multiplied by  $U_{Rdc}$  and divided by the applied voltage.

For all other pulses following equation must be fulfilled:  $2 \times \int_0^T \left(\frac{dU}{dt}\right)^2 \times dt < U_{Rdc} \times \left(\frac{dU}{dt}\right)_{rated}$

T is the pulse duration.

4. The maximum component surface temperature rise must be lower than the limits (see figure max. allowed component temperature rise).
5. Since in circuits used at voltages over 280 V peak-to-peak the risk for an intrinsically active flammability after a capacitor breakdown (short circuit) increases, it is recommended that the power to the component is limited to 100 times the values mentioned in the table: "Heat conductivity"
6. When using these capacitors as across-the-line capacitor in the input filter for mains applications or as series connected with an impedance to the mains the applicant must guarantee that the following conditions are fulfilled in any case (spikes and surge voltages from the mains included).

**Voltage Conditions for 6 Above**

| ALLOWED VOLTAGES                             | $T_{amb} \leq 85\text{ }^{\circ}\text{C}$ | $85\text{ }^{\circ}\text{C} < T_{amb} \leq 100\text{ }^{\circ}\text{C}$     |
|--|---|---|
| Maximum continuous RMS voltage               | $U_{Rac}$                                 | See "Max. AC voltage as function of temperature CBB952" per characteristics |
| Maximum temperature RMS-overvoltage (< 24 h) | $1.25 \times U_{Rac}$                     | $U_{Rac}$   |
| Maximum peak voltage ( $V_{O-P}$ ) (< 2 s)   | $1.6 \times U_{Rdc}$                      | $1.3 \times U_{Rdc}$  |

**EXAMPLE**

$C = 330\text{ nF} - 63\text{ V}$  used for the voltage signal shown in next drawing.


$U_{P-P} = 40\text{ V}$ ;  $U_P = 35\text{ V}$ ;  $T_1 = 100\text{ }\mu\text{s}$ ;  $T_2 = 200\text{ }\mu\text{s}$

The ambient temperature is  $35\text{ }^{\circ}\text{C}$

Checking conditions:

1. The peak voltage  $U_P = 35\text{ V}$  is lower than  $63\text{ Vdc}$
2. The peak-to-peak voltage  $40\text{ V}$  is lower than  $2\sqrt{2} \times 40\text{ Vac} = 113\text{ }U_{P-P}$
3. The voltage pulse slope ( $dU/dt$ ) =  $40\text{ V}/100\text{ }\mu\text{s} = 0.4\text{ V}/\mu\text{s}$   
This is lower than  $60\text{ V}/\mu\text{s}$  (see specific reference data for each version)
4. The dissipated power is  $16.2\text{ mW}$  as calculated with fourier terms  
The temperature rise for  $W_{max.} = 3.5\text{ mm}$  and pitch =  $5\text{ mm}$  will be  $16.2\text{ mW}/3.0\text{ mW}/^{\circ}\text{C} = 5.4\text{ }^{\circ}\text{C}$   
This is lower than  $15\text{ }^{\circ}\text{C}$  temperature rise at  $35\text{ }^{\circ}\text{C}$ , according figure max. allowed component temperature rise
5. Not applicable
6. Not applicable

**Voltage Signal**

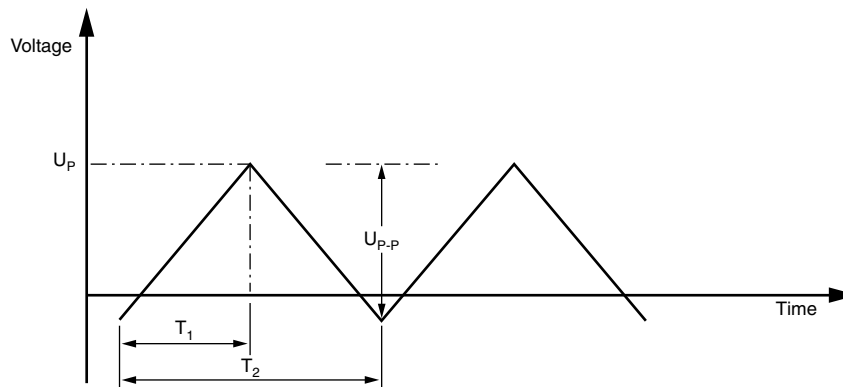



DC Film Capacitor  
MKT Radial Potted Type

Vishay BCcomponents

**INSPECTION REQUIREMENTS**

**General Notes:**

Sub-clause numbers of tests and performance requirements refer to the “Sectional Specification, Publication IEC 60384-2 and Specific Reference Data”.

**Group C Inspection Requirements**

| SUB-CLAUSE NUMBER AND TEST                          | CONDITIONS  | PERFORMANCE REQUIREMENTS   |
|---|---|--|
| <b>SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1</b> |   |  |
| 4.1 Dimensions (detail)                             |   | As specified in chapters “MKT 370 General Data” of this specification  |
| 4.3.1 Initial measurements                          | Capacitance<br>Tangent of loss angle:<br>For C ≤ 470 nF at 100 kHz or<br>for C > 470 nF at 10 kHz   |  |
| 4.3 Robustness of terminations                      | Tensile and bending   | No visible damage  |
| 4.4 Resistance to soldering heat                    | Method: 1A<br>Solder bath: 280 °C ± 5 °C<br>Duration: 10 s  |  |
| 4.14 Component solvent resistance                   | Isopropylalcohol at room temperature<br>Method: 2<br>Immersion time: 5 ± 0.5 min<br>Recovery time: Min. 1 h, max. 2 h   |  |
| 4.4.2 Final measurements                            | Visual examination<br><br>Capacitance<br>Tangent of loss angle  | No visible damage<br>Legible marking<br>$ \Delta C/C  \leq 2\%$ of the value measured initially<br>Increase of $\tan \delta$<br>≤ 0.005 for:<br>C ≤ 100 nF or<br>≤ 0.010 for:<br>100 nF < C ≤ 220 nF or<br>≤ 0.015 for:<br>220 nF < C ≤ 470 nF and<br>≤ 0.003 for:<br>C > 470 nF<br>Compared to values measured in 4.3.1 |
| <b>SUB-GROUP C1B PART OF SAMPLE OF SUB-GROUP C1</b> |   |  |
| 4.6.1 Initial measurements                          | Capacitance<br>Tangent of loss angle:<br>For C ≤ 470 nF at 100 kHz or<br>for C > 470 nF at 10 kHz   |  |
| 4.6 Rapid change of temperature                     | θA = - 55 °C<br>θB = + 100 °C<br>5 cycles<br>Duration t = 30 min  |  |
| 4.7 Vibration                                       | Visual examination<br>Mounting:<br>See section “Mounting” of this specification<br>Procedure B4<br>Frequency range: 10 Hz to 55 Hz<br>Amplitude: 0.75 mm or<br>Acceleration 98 m/s <sup>2</sup><br>(whichever is less severe)<br>Total duration 6 h | No visible damage  |
| 4.7.2 Final inspection                              | Visual examination  | No visible damage  |



| SUB-CLAUSE NUMBER AND TEST  | CONDITIONS  | PERFORMANCE REQUIREMENTS   |
|---|---|--|
| <p>4.9 Shock</p> <p>4.9.3 Final measurements</p>  | <p>Mounting:<br/>See section "Mounting" of this specification<br/>Pulse shape: Half sine<br/>Acceleration: 490 m/s<sup>2</sup><br/>Duration of pulse: 11 ms</p> <p>Visual examination</p> <p>Capacitance</p> <p>Tangent of loss angle</p> <p>Insulation resistance</p>                                  | <p>No visible damage</p> <p><math> \Delta C/C  \leq 3\%</math> of the value measured in 4.6.1</p> <p>Increase of <math>\tan \delta</math><br/> <math>\leq 0.010</math> for:<br/> <math>C \leq 220</math> nF or<br/> <math>\leq 0.015</math> for:<br/> <math>220</math> nF &lt; <math>C \leq 470</math> nF and<br/> <math>\leq 0.003</math> for:<br/> <math>C &gt; 470</math> nF</p> <p>Compared to values measured in 4.6.1</p> <p>As specified in section "Specific Reference Data 370" of this specification</p>   |
| <p><b>SUB-GROUP C1 COMBINED SAMPLE OF SPECIMENS OF SUB-GROUPS C1A AND C1B</b></p>   |   |  |
| <p>4.10 Climatic sequence</p> <p>4.10.2 Dry heat</p> <p>4.10.3 Damp heat cyclic<br/>Test Db, first cycle</p> <p>4.10.4 Cold</p> <p>4.10.6 Damp heat cyclic<br/>Test Db, remaining cycles</p> <p>4.10.6.2 Final measurements</p> | <p>Temperature: + 100 °C<br/>Duration: 16 h</p> <p>Temperature: - 55 °C<br/>Duration: 2 h</p> <p>Voltage proof = <math>U_{Rdc}</math> for 1 min within 15 min after removal from testchamber</p> <p>Visual examination</p> <p>Capacitance</p> <p>Tangent of loss angle</p> <p>Insulation resistance</p> | <p>No breakdown of flash-over</p> <p>No visible damage<br/>Legible marking</p> <p><math> \Delta C/C  \leq 5\%</math> of the value measured in 4.4.2 or 4.9.3</p> <p>Increase of <math>\tan \delta</math><br/> <math>\leq 0.010</math> for:<br/> <math>C \leq 220</math> nF or<br/> <math>\leq 0.015</math> for:<br/> <math>220</math> nF &lt; <math>C \leq 470</math> nF and<br/> <math>\leq 0.005</math> for:<br/> <math>C &gt; 470</math> nF</p> <p>Compared to values measured in 4.3.1 or 4.6.1</p> <p><math>\geq 50\%</math> of values specified in section "Specific Reference Data 370" of this specification</p> |
| <p><b>SUB-GROUP C2</b></p>  |   |  |
| <p>4.11 Damp heat steady state</p> <p>4.11.1 Initial measurements</p>   | <p>56 days, 40 °C, 90 % to 95 % RH</p> <p>Capacitance</p> <p>Tangent of loss angle at 1 kHz</p>   |  |





DC Film Capacitor  
MKT Radial Potted Type

Vishay BCcomponents

| SUB-CLAUSE NUMBER AND TEST  | CONDITIONS   | PERFORMANCE REQUIREMENTS  |
|---|--|---|
| 4.11.3 Final measurements   | Voltage proof = $U_{Rdc}$ for 1 min within 15 min after removal from testchamber<br><br>Visual examination<br><br>Capacitance<br>Tangent of loss angle<br><br>Insulation resistance  | No breakdown of flash-over<br><br>No visible damage<br>Legible marking<br><br>$ \Delta C/C  \leq 5\%$ of the value measured in 4.11.1.<br><br>Increase of $\tan \delta \leq 0.005$<br>Compared to values measured in 4.11.1<br><br>$\geq 50\%$ of values specified in section "Specific Reference Data 370" of this specification   |
| <b>SUB-GROUP C3</b>   |  |   |
| 4.12 Endurance<br><br>4.12.1 Initial measurements<br><br>4.12.5 Final measurements            | Duration: 2000 h<br>$1.25 \times U_{Rdc}$ at 85 °C<br>$0.8 \times 1.25 U_{Rdc}$ at 100 °C<br><br>Capacitance<br>Tangent of loss angle:<br>For $C \leq 470$ nF at 100 kHz or<br>for $C > 470$ nF at 10 kHz<br><br>Visual examination<br><br>Capacitance<br><br>Tangent of loss angle<br><br>Insulation resistance | No visible damage<br>Legible marking<br><br>$ \Delta C/C  \leq 5\%$ compared to values measured in 4.12.1<br><br>Increase of $\tan \delta$<br>$\leq 0.005$ for at 85 °C<br>$\leq 0.010$ for at 100 °C for:<br>$C \leq 220$ nF or<br>$\leq 0.015$ for:<br>$220$ nF < $C \leq 470$ nF and<br>$\leq 0.003$ for:<br>$C > 470$ nF<br>Compared to values measured in 4.12.1<br><br>$\geq 50\%$ of values specified in section "Specific Reference Data 370" of this specification |
| <b>SUB-GROUP C4</b>   |  |   |
| 4.13 Charge and discharge<br><br>4.13.1 Initial measurements<br><br>4.13.3 Final measurements | 10 000 cycles<br>Charged to $U_{Rdc}$<br>Discharge resistance:<br>$R = \frac{U_R}{C \times 2.5 \times (dU/dt)_R}$<br><br>Capacitance<br>Tangent of loss angle:<br>For $C \leq 470$ nF at 100 kHz or<br>for $C > 470$ nF at 10 kHz<br><br>Capacitance<br><br>Tangent of loss angle<br><br>Insulation resistance   | $ \Delta C/C  \leq 3\%$ compared to values measured in 4.13.1<br><br>Increase of $\tan \delta$<br>$\leq 0.005$ for:<br>$C \leq 100$ nF or<br>$\leq 0.010$ for:<br>$100$ nF < $C \leq 220$ nF or<br>$\leq 0.015$ for:<br>$220$ nF < $C \leq 470$ nF and<br>$\leq 0.003$ for:<br>$C > 470$ nF<br>Compared to values measured in 4.13.1<br><br>$\geq 50\%$ of values specified in section "Specific Reference Data 370" of this specification                                  |



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.