

# Type DPM Polypropylene Film Capacitors

## Metallized, Radial Leads

## Great for High Frequency Switching Power Supplies



Type DPM radial-leaded, metallized polypropylene capacitors boast non-inductive windings with welded lead terminations which handle high continuous currents. The low ESR and low ESL are a glove fit for high frequency and switching power supply applications.

## Specifications

**Voltage Range:** 250 to 630 Vdc (160 to 250 Vac, 60 Hz)

**Capacitance Range:** .01 to 6.8  $\mu$ F

**Capacitance Tolerance:**  $\pm$ 10% (K) standard  
 $\pm$ 5% (J) optional

**Operating Temperature Range:**  $-55^{\circ}$ C to  $105^{\circ}$ C\*


\*Full-rated voltage at  $85^{\circ}$ C—Derate linearly to 50%-rated voltage at  $105^{\circ}$ C

**Dielectric Strength:** 175% (1 minute)

**Dissipation Factor:** .10% Max. ( $25^{\circ}$ C, 1 kHz)

**Insulation Resistance:** 10,000  $M\Omega \times \mu$ F  
30,000  $M\Omega$  Min.

**Life Test:** 1,000 hours at  $85^{\circ}$ C at 125% rated voltage

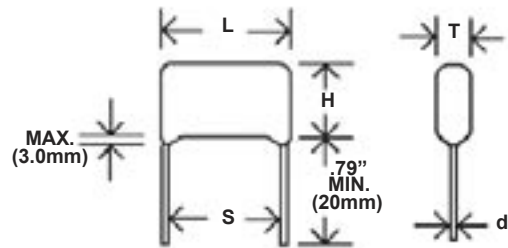

**NOTE:** Other capacitance values, sizes and performance specifications are available. Contact us.

## Ratings

## RoHS Compliant

Cap. ( $\mu$ F)	Catalog Part Number	T Max. Inches(mm)	H Max. Inches(mm)	L Max. Inches(mm)	S $\pm$ .06 ( $\pm$ 1.5) Inches(mm)	d Inches(mm)	dV/dt V/ $\mu$ s
<b>250 Vdc (160 Vac)</b>							
.010	DPM2S1K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.015	DPM2S15K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.022	DPM2S22K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.033	DPM2S33K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.047	DPM2S47K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.068	DPM2S68K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.10	DPM2P1K-F	0.315(8.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	34
.15	DPM2P15K-F	0.315(8.0)	0.512(13.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	23
.22	DPM2P22K-F	0.315(8.0)	0.512(13.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	23
.33	DPM2P33K-F	0.354(9.0)	0.591(15.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	23
.47	DPM2P47K-F	0.394(10.0)	0.630(16.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	19
.68	DPM2P68K-F	0.394(10.0)	0.630(16.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	19

# Type DPM Polypropylene Film Capacitors

**Ratings**

**RoHS Compliant**

Cap. ( $\mu\text{F}$ )	Catalog Part Number	T Max. Inches(mm)	H Max. Inches(mm)	L Max. Inches(mm)	S $\pm .06$ ( $\pm 1.5$ ) Inches(mm)	d Inches(mm)	dV/dt V/ $\mu\text{s}$
<b>250 Vdc (160 Vac)</b>							
1.00	DPM2W1K-F	0.473(12.0)	0.788(20.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	19
1.50	DPM2W1P5K-F	0.551(14.0)	0.866(22.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	14
2.20	DPM2W2P2K-F	0.591(15.0)	0.945(24.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	14
3.30	DPM2W3P3K-F	0.670(17.0)	1.063(27.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	8
4.70	DPM2W4P7K-F	0.788(20.0)	1.182(30.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	8
6.80	DPM2W6P8K-F	0.906(23.0)	1.300(33.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	8
<b>400 Vdc (220 Vac)</b>							
.010	DPM4S1K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	51
.015	DPM4S15K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	51
.022	DPM4S22K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	51
.033	DPM4S33K-F	0.315(8.0)	0.473(12.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	51
.047	DPM4S47K-F	0.315(8.0)	0.473(12.0)	0.709(18.0)	0.591(15.0)	0.024(0.6)	35
.068	DPM4S68K-F	0.315(8.0)	0.512(13.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	35
.10	DPM4P1K-F	0.354(9.0)	0.551(14.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	35
.15	DPM4P15K-F	0.315(8.0)	0.591(15.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	26
.22	DPM4P22K-F	0.394(10.0)	0.630(16.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	26
.33	DPM4P33K-F	0.433(11.0)	0.709(18.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	26
.47	DPM4P47K-F	0.433(11.0)	0.709(18.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	17
.68	DPM4P68K-F	0.551(14.0)	0.866(22.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	17
1.00	DPM4W1K-F	0.630(16.0)	0.985(25.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	17
1.50	DPM4W1P5K-F	0.670(17.0)	0.985(25.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	11
2.20	DPM4W2P2K-F	0.788(20.0)	1.103(28.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	11
3.30	DPM4W3P3K-F	0.945(24.0)	1.300(33.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	11
<b>630 Vdc (250 Vac)</b>							
.010	DPM6S1K-F	0.276(7.0)	0.433(11.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	69
.015	DPM6S15K-F	0.276(7.0)	0.473(12.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	69
.022	DPM6S22K-F	0.315(8.0)	0.512(13.0)	0.512(13.0)	0.394(10.0)	0.024(0.6)	69
.033	DPM6S33K-F	0.315(8.0)	0.512(13.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	48
.047	DPM6S47K-F	0.354(9.0)	0.591(15.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	48
.068	DPM6S68K-F	0.394(10.0)	0.630(16.0)	0.709(18.0)	0.591(15.0)	0.032(0.8)	48
.10	DPM6P1K-F	0.394(10.0)	0.610(15.5)	1.024(26.0)	0.886(22.5)	0.032(0.8)	36
.15	DPM6P15K-F	0.473(12.0)	0.709(18.0)	1.024(26.0)	0.886(22.5)	0.032(0.8)	36
.22	DPM6P22K-F	0.473(12.0)	0.866(22.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	33
.33	DPM6P33K-F	0.512(13.0)	0.866(22.0)	1.260(32.0)	1.083(27.5)	0.032(0.8)	33
.47	DPM6P47K-F	0.591(15.0)	0.965(24.5)	1.260(32.0)	1.083(27.5)	0.032(0.8)	33
.68	DPM6P68K-F	0.610(15.5)	1.083(27.5)	1.260(32.0)	1.083(27.5)	0.032(0.8)	33
1.00	DPM6W1K-F	0.748(19.0)	1.182(30.0)	1.851(47.0)	1.575(40.0)	0.032(0.8)	22