



F92 Resin-molded Chip, Compact Series



■ Type numbering system (Example: 6.3V 10μF)

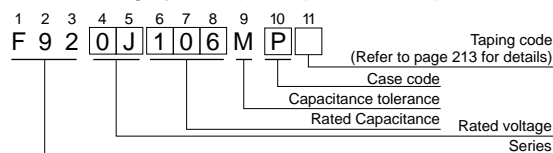


■ Drawing



■ Dimensions

Case code	L	W ₁	W ₂	H	S
J	1.6 ± 0.1	0.8 ± 0.1	0.6 ± 0.1	0.8 ± 0.1	0.4 ± 0.1
P	2.0 ± 0.2	1.25 ± 0.1	0.9 ± 0.1	1.1 ± 0.1	0.5 ± 0.2
A	3.2 ± 0.2	1.6 ± 0.2	1.2 ± 0.1	1.1 ± 0.1	0.8 ± 0.2
B	3.4 ± 0.2	2.8 ± 0.2	2.3 ± 0.1	1.1 ± 0.1	0.8 ± 0.2

■ Marking

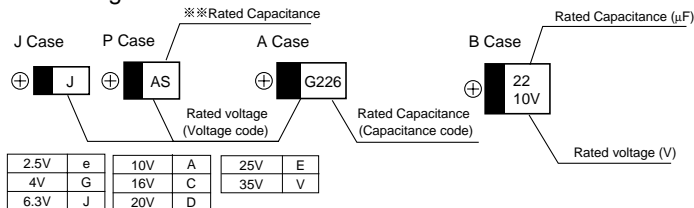

※ ※ Capacitance code of "P" case products are as shown below.

■ Specifications

Item	Performance Characteristics	
	J • P Case	A • B Case
Category	-55 ~ +125°C (Rated temperature : 85°C)	
Temperature Range	-55 ~ +125°C (Rated temperature : 85°C)	
Capacitance Tolerance	±20% (at 120Hz)	
Dissipation Factor (120Hz)	refer to P.216	
E.S.R. (100kHz)	refer to P.216	
Leakage Current	<ul style="list-style-type: none"> After 1 minute's application of rated voltage, leakage current at 20°C is not more than 0.01CV or 0.5μA, whichever is greater. After 1 minute's application of rated voltage, leakage current at 85°C is not more than 0.1CV or 5μA, whichever is greater. After 1 minute's application of derated voltage, leakage current at 125°C is not more than 0.125CV or 6.3μA, whichever is greater. 	
Capacitance Change by Temperature	+20% Max. (at +125°C) +15% Max. (at +85°C) -15% Max. (at -55°C)	+15% Max. (at +125°C) +10% Max. (at +85°C) -10% Max. (at -55°C)
Damp Heat (No voltage applied)	At 40°C 90 ~ 95% R.H. 240 hours Capacitance Change... Within ±20% of initial value Dissipation Factor... 150% or less of initial specified value Leakage Current... Initial specified value or less	At 40°C 90 ~ 95% R.H. 500 hours Capacitance Change... Within ±10% of initial value Initial specified value or less Initial specified value or less
Temperature Cycles	-55°C / +125°C 30 minutes each 5 cycles Capacitance Change... Within ±10% of initial value (J case Within ±20%) Dissipation Factor... 150% of less of initial specified value *1 Leakage Current... Initial specified value or less	Within ±5% of initial value Initial specified value or less Initial specified value or less

Resistance to Soldering Heat	5 seconds immersion at 260°C, 10 seconds reflow at 260°C Capacitance Change... Within ±10% of initial value (J case within ±20%) Dissipation Factor... 150% of less of initial specified value*1 Leakage Current... Initial specified value or less	Within ±5% of initial value Initial specified value or less Initial specified value or less
Surge*	After application of surge voltage in series with a 33Ω (For "J" "P" case: 1kΩ) resistor at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 85°C, capacitors meet the characteristics requirements listed below. Capacitance Change... Within ±10% of initial value (J case within ±20%) Dissipation Factor... 150% or less of initial specified value*1 Leakage Current... Initial specified value or less	Within ±5% of initial value Initial specified value or less Initial specified value or less
Endurance*	After 1000hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors meet the characteristic requirements listed below. Capacitance Change... Within ±10°C of initial value (J case within ±20%) Dissipation Factor... 150% or less of initial specified value*1 Leakage Current... Initial specified value or less (J case 2 times value or less)	After 2000hours' application of rated voltage in series with a 3Ω resistor at 85°C, or derated voltage in series with a 3Ω resistor at 125°C, capacitors meet the characteristic requirements listed below. Capacitance Change... Within ±10°C of initial value Dissipation Factor... Initial specified value or less Leakage Current... Initial specified value or less
Shear Test	After applying the pressure load of 5N for 10±1 seconds horizontally to the center of capacitor side body which has no electrode and has been soldered beforehand on an aluminum substrate, there shall be found neither exfoliation nor its sign at the terminal electrode.	 5N (0.51kg · f) For 10 ± 1seconds
Terminal Strength	Keeping a capacitor surface-mounted on a substrate upside down and supporting the substrate at both of the opposite bottom points 45mm apart from the center of the capacitor, the pressure strength is applied with a specified jig at the center of the substrate so that the substrate may bend by 1mm as illustrated. Then, there shall be found no remarkable abnormality on the capacitor terminals.	 R230 45 45 1mm

* As for the surge and derated voltage at 125°C, refer to page 212 for details.

■ Standard ratings

Cap.(μF)	V Code	2.5	4	6.3	10	16	20	25	35	※ ※ Capacitance code
		0E	0G	0J	1A	1C	1D	1E	1V	
0.1	104								A	
0.15	154								A	
0.22	224						P · A	A	A	J
0.33	334						P · A	A	A	N
0.47	474					P	P · A	A	B	S
0.68	684			P	P	P	A	B	B	W
1	105			P	P	J · P · A	P · A	P · A · B	(A)	A
1.5	155			P	P · A	P · A	A · B			E
2.2	225		P	J · P · A	J · P · A	P · A · B	A · B	(B)	(B)	J
3.3	335		P · A	P · A	P · A	A · B	B			N
4.7	475	P	J · P · A	J · P · A	P · A	A · B	B			S
6.8	685	P	J · P · A	P · A	P · A	B				w
10	106	J · P · A	J · P · A	J · P · A	P · A · B	(A) · B				a
15	156	P · A	P · A	P · A	A · B					e
22	226	P · A	P · A	P · A · B	(A) · B	(B)				j
33	336	P · A	(P) · A · B	(A) · B	B					n
47	476	B	(A) · B	B						
68	686	B	B							
100	107	B	B	(B)						

() The series in parentheses are being developed.
 Please contact to your local Nichicon sales office when these series are being designed in your application.

F92

■ Standard ratings

Rated Volt (V)	Rated Capacitance (μF)	Case size	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	E. S. R. (Ω@100kHz)	Rated Volt (V)	Rated Capacitance (μF)	Case size	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	E. S. R. (Ω@100kHz)	
2.5V	4.7	P	F920E475MPA	0.5	8	6.0	10V	1	P	F921A105MPA	0.5	8	12.0	
	6.8	P	F920E685MPA	0.5	10	6.0		1.5	P	F921A155MPA	0.5	8	12.0	
	10	J	F920E106MJA	0.5	20	6.5		1.5	A	F921A155MAA	0.5	6	7.4	
	10	P	F920E106MPA	0.5	10	6.0		2.2	J	F921A225MJA	0.5	20	17.5	
	10	A	F920E106MAA	0.5	8	4.0		2.2	P	F921A225MPA	0.5	8	12.0	
	15	P	F920E156MPA	0.5	10	5.0		2.2	A	F921A225MAA	0.5	6	7.0	
	15	A	F920E156MAA	0.5	8	4.0		3.3	P	F921A335MPA	0.5	8	12.0	
	22	P	F920E226MPA	0.6	20	4.0		3.3	A	F921A335MAA	0.5	6	7.0	
	22	A	F920E226MAA	0.6	12	2.8		4.7	P	F921A475MPA	0.5	8	6.0	
	33	P	F920E336MPA	0.8	20	4.0		4.7	A	F921A475MAA	0.5	6	4.0	
	33	A	F920E336MAA	0.8	12	2.8		6.8	P	F921A685MPA	0.7	8	6.0	
	47	B	F920E476MBA	1.2	12	1.7		6.8	A	F921A685MAA	0.7	6	4.0	
	68	B	F920E686MBA	1.7	12	1.5		10	P	F921A106MPA	1.0	14	6.0	
	100	B	F920E107MBA	2.5	18	1.3		10	A	F921A106MAA	1.0	8	4.0	
4V	2.2	P	F920G225MPA	0.5	8	12.0	10	B	F921A106MBA	1.0	6	2.0		
	3.3	P	F920G335MPA	0.5	8	12.0	15	A	F921A156MAA	1.5	8	4.0		
	3.3	A	F920G335MAA	0.5	6	7.0	15	B	F921A156MBA	1.5	6	2.0		
	4.7	J	F920G475MJA	0.5	20	8.5	22	B	F921A226MBA	2.2	8	1.9		
	4.7	P	F920G475MPA	0.5	8	6.0	33	B	F921A336MBA	3.3	12	1.9		
	4.7	A	F920G475MAA	0.5	6	4.0	16V	0.47	P	F921C474MPA	0.5	8	20.0	
	6.8	J	F920G685MJA	0.5	20	7.5		0.68	P	F921C684MPA	0.5	8	12.0	
	6.8	P	F920G685MPA	0.5	10	6.0		1	J	F921C105MJA	0.5	20	25.5	
	6.8	A	F920G685MAA	0.5	6	4.0		1	P	F921C105MPA	0.5	8	12.0	
	10	J	F920G106MJA	0.5	20	6.5		1	A	F921C105MAA	0.5	4	10.0	
	10	P	F920G106MPA	0.5	10	6.0		1.5	P	F921C155MPA	0.5	8	12.0	
	10	A	F920G106MAA	0.5	8	4.0		1.5	A	F921C155MAA	0.5	6	7.4	
	15	P	F920G156MPA	0.6	10	5.0		2.2	P	F921C225MPA	0.5	8	12.0	
	15	A	F920G156MAA	0.6	8	4.0		2.2	A	F921C225MAA	0.5	6	7.0	
	22	P	F920G226MPA	0.9	20	5.0		2.2	B	F921C225MBA	0.5	6	3.0	
	22	A	F920G226MAA	0.9	12	2.8		3.3	A	F921C335MAA	0.5	6	7.0	
	33	A	F920G336MAA	1.3	12	2.8		3.3	B	F921C335MBA	0.5	6	3.0	
	33	B	F920G336MBA	1.3	12	1.7		4.7	A	F921C475MAA	0.8	6	7.0	
47	B	F920G476MBA	1.9	12	1.7	4.7		B	F921C475MBA	0.8	6	3.0		
68	B	F920G686MBA	2.7	18	1.5	6.8		B	F921C685MBA	1.1	6	3.0		
100	B	F920G107MBA	4.0	18	1.3	10		B	F921C106MBA	1.6	6	2.0		
6.3V	1	P	F920J105MPA	0.5	8	12.0		20V	0.22	P	F921D224MPA	0.5	8	20.0
	1.5	P	F920J155MPA	0.5	8	12.0			0.22	A	F921D224MAA	0.5	4	10.0
	2.2	J	F920J225MJA	0.5	20	17.5	0.33		P	F921D334MPA	0.5	8	20.0	
	2.2	P	F920J225MPA	0.5	8	12.0	0.33		A	F921D334MAA	0.5	4	10.0	
	2.2	A	F920J225MAA	0.5	6	7.0	0.47		P	F921D474MPA	0.5	8	20.0	
	3.3	P	F920J335MPA	0.5	8	12.0	0.47		A	F921D474MAA	0.5	4	10.0	
	3.3	A	F920J335MAA	0.5	6	7.0	0.68		A	F921D684MAA	0.5	4	10.0	
	4.7	J	F920J475MJA	0.5	20	8.5	1		P	F921D105MPA	0.5	8	20.0	
	4.7	P	F920J475MPA	0.5	8	6.0	1		A	F921D105MAA	0.5	4	10.0	
	4.7	A	F920J475MAA	0.5	6	4.0	1.5		A	F921D155MAA	0.5	6	7.4	
	6.8	P	F920J685MPA	0.5	10	6.0	1.5	B	F921D155MBA	0.5	6	4.0		
	6.8	A	F920J685MAA	0.5	6	4.0	2.2	A	F921D225MAA	0.5	6	7.0		
	10	J	F920J106MJA	0.6	20	8.5	2.2	B	F921D225MBA	0.5	6	3.0		
	10	P	F920J106MPA	0.6	10	6.0	3.3	B	F921D335MBA	0.7	6	3.0		
	10	A	F920J106MAA	0.6	8	4.0	4.7	B	F921D475MBA	0.9	6	3.0		
	15	P	F920J156MPA	0.9	10	6.0	25V	0.22	A	F921E224MAA	0.5	4	10.0	
	15	A	F920J156MAA	0.9	8	4.0		0.33	A	F921E334MAA	0.5	4	10.0	
	22	P	F920J226MPA	1.4	20	5.0		0.47	A	F921E474MAA	0.5	4	10.0	
	22	A	F920J226MAA	1.4	12	2.8		0.68	B	F921E684MBA	0.5	4	4.0	
	22	B	F920J226MBA	1.4	8	1.9		1	P	F921E105MPA	0.5	8	20.0	
33	B	F920J336MBA	2.1	12	1.7	1		A	F921E105MAA	0.5	6	10.0		
47	B	F920J476MBA	3.0	12	1.7	1		B	F921E105MBA	0.5	4	4.0		
35V	0.1	A	F921V104MAA	0.5	4	10.0		35V	0.15	A	F921V154MAA	0.5	4	10.0
	0.15	A	F921V154MAA	0.5	4	10.0	0.22		A	F921V224MAA	0.5	4	10.0	
	0.22	A	F921V224MAA	0.5	4	10.0	0.33		A	F921V334MAA	0.5	4	10.0	
	0.33	A	F921V334MAA	0.5	4	10.0	0.47		B	F921V474MBA	0.5	4	4.0	
	0.47	B	F921V474MBA	0.5	4	4.0	0.68		B	F921V684MBA	0.5	4	4.0	