




PortServer TS device servers are designed for standard and secure serial-to-Ethernet connectivity. They are ideal for RS-232 applications requiring seamless integration to existing application environments and network device management.

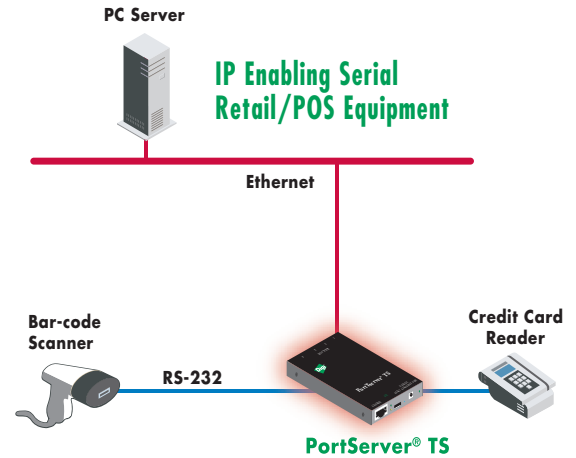

Features/Benefits

- Easily network-enable multiple serial devices
- RS-232 provides an easy connection to any serial device
- Digi's patented RealPort for COM or TTY port control and management
- Management and diagnostic utility for simple and efficient device monitoring and troubleshooting
- Modem emulation allows existing modem-based applications to make connections over IP networks
- Secure communication via SSHv2
- Port buffering for data capture
- Easy configuration through web interface (HTTP/HTTPS)
- SNMP for easy network management
- PPP support
- Tunable for low latency or optimized throughput

Overview

The PortServer TS delivers simple, reliable and cost-effective network connectivity for multiple serial devices. Available in one-, two- and four-port models, it addresses the growing need to connect individual devices to the network over industry standard Ethernet in many applications, including retail/point-of-sale, building control and medical point-of-care.

Part of Digi's broad device server offering, the PortServer TS delivers standard serial-to-Ethernet connectivity and is ideal for applications requiring COM ports, serial tunneling, or where TCP/UDP socket or multiple unicast functionality is needed. Digi's RealPort® technology, which features encryption and user authentication*, delivers the industry's most robust, reliable and versatile COM port control and management. RealPort makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

The PortServer TS is easy to install locally or remotely through a variety of IP addressing methods (DHCP, RARP, ARP-Ping) along with an application included on the installation CD that will automatically detect all PortServer devices on your network.

*The RealPort encryption feature works with the following operating systems: AIX, HP UX, Linux, Windows XP, Windows 2000, Windows Server 2003, SCO OpenServer and Solaris. The RealPort authentication feature is compatible only with Windows XP, Windows 2000 and Windows Server 2003.

Features/Specifications

FEATURES

- 10/100Base-T Ethernet support
- 1/2/4 RS-232 RJ-45 serial ports
- Baud rates up to 230 Kbps
- Full modem and hardware flow control
- TCP/UDP Socket Services
- Telnet and Reverse Telnet
- Patented RealPort with encryption for COM and TTY ports
- 9-30VDC input
- RFC 2217
- Modem emulation
- SNMP (read/write)
- PPP
- SSHv2
- Port buffering
- Modbus to Modbus/TCP conversion
- Easy configuration through web interface (HTTP/HTTPS)
- Digi Port Authority – Remote management diagnostics and auto-discovery tool
- DHCP/RARP/ARP-Ping for IP Address assignment
- LED status for link and power
- RJ-45/DB-9F crossover cable included for optional serial configuration

DIMENSIONS

- Length: 5.25 in (13.34 cm)
- Width: 3.33 in (8.46 cm)
- Depth: 0.95 in (2.42 cm)
- Weight: 2.25 oz (64.00 g)

MODEL.....PART NUMBERS

Model	North America	International
PortServer TS 1	70002041	70002042
PortServer TS 2	70002043	70002044
PortServer TS 4	70002045	70002046
Accessories		
Wall-Mount Bracket	76000640	76000640
DIN Rail Bracket	76000682	76000682
Replacement Power Supply (wall mount)	76000737	N/A
Replacement Power Supply (small brick)	76000654	76000654

See product catalog for cabling/connector options.

OPERATING SYSTEMS

- AIX
- HP-UX
- Linux
- Windows® XP*
- Windows 2000*
- Windows Server™ 2003*
- Windows NT®
- Windows 98/ME
- SCO® OpenServer™
- SCO UnixWare™
- Solaris™ (Intel)
- Solaris (SPARC)
- TCP/UDP Socket Services are operating system independent



ENVIRONMENTAL


- Operating temperature: 0° C to 60° C (32° F to 140° F)
- Relative humidity: 5% to 90% (non-condensing)
- Ethernet Isolation: 1500VAC min per IEEE 802.3/ANSI x 3.263
- Serial Port Protection (ESD): 15 kV air and 8 kV contact

REGULATORY APPROVALS


- FCC Part 15, A
- CE
- 55034
- 55022, Class A
- UL 1950
- CSA 22.2 No. 950

POWER REQUIREMENTS


- Power supply included
- **North America**
12VDC/.5A max out; 120VAC in (wall mount)
- **International**
12VDC/.5A max out; 100-240VAC in (small brick)
- Product will accept 9-30VDC
- Power Consumption
 - Typical: 4W
 - Max: 6W
- Surge Protection (with included power supply)
 - 4 kV burst (EFT)
 - 2 kV surge



PortServer TS Family - Front



PortServer TS 1/2/4 - Back



DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

WHEN RELIABILITY MATTERS™

Digi International
11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France
31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK
NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited
Unit 3206 - 08A, 32/F,
AIA Tower
183 Electric Road,
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 1999-2008 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, the When Reliability Matters logo, PortServer and RealPort are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. Microsoft, Windows and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective holders.

91001359
B2/808

