
Pomona®

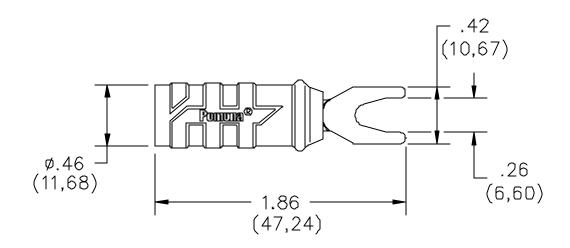

FEATURES:

- Ideal for use with binding posts
- Compatible with any Pomona banana plug or equivalent
- Has a shrouded jack for use with any shrouded DMM plug

MATERIALS:

Insulator – Nylon Spade – Nickel plated copper.

RATINGS:

Operating Voltage – 1000 VRMS Max. Current – 15 Amperes

ORDERING INFORMATION: Model 6203 - Set of one red, one black spade lug Model 1614A-*

* =Color, -0 Black, -2 Red

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 4/15/02 SY/EH/LS
 Sales: 909-469-2900
 Fax: 909-629-3317

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d1614A_6203_1_02.doc