

Tip Plug

Insulated Standard: Small Handle (Solder or Crimp)



SPECIFICATIONS

Contact: Brass per QQ-B-626D

Finish: Nickel


Insulated Handle: Nylon 6/6 per ASTM D4066

RATINGS

Current: 10 amps

Breakdown Voltage: 3500 Vrms minimum †

Contact Resistance: 0.010 ohms maximum

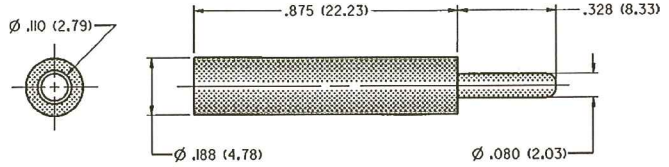

| NICKEL PLATING | |
|---|--------------------------------|
| SOLDER TYPE UP TO 16 GAUGE | CRIMP TYPE 16 GAUGE |
| PART NO. | COLOR |
| 105-0773-001 | Black |



For Standard Tip Jack: .080 (2.00) Diameter

FEATURES:

- Solder or crimp type connection
- Accepts wire sizes up to 16 gauge
- Nylon UL approved for self extinguishing
- Designed for use with horizontal and vertical test jacks only.