

# TEST JACKS



Designers' Choice



## VERTICAL PC TEST JACK

ACCEPTS .080" TIP

This low profile vertical jack allows dense packaging where space is limited. Mounts into a .052" diameter hole. Provides easy access and positive electrical contact. The contact is recessed to prevent accidental shorting. Capacitance between two adjacent jacks less than 1.0 pF at 1 MHz. Operating voltage is 1500 Volts RMS. Current rating 5 Amps max.

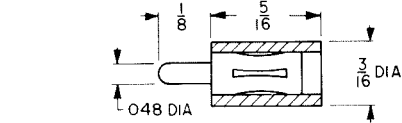

ACTUAL SIZE

SELECTION OF COLORS

CAT. NO.	COLOR
6036	WHITE
6037	RED
6038	BLACK
6039	YELLOW
6040	GREEN
6041	BLUE

**MATERIAL**




Body: Nylon per ASTM D4066  
Contact: Brass, Silver Plate

## SNAP-IN VERTICAL PC TEST JACK

ACCEPTS .080" TIP

Low cost, compact and dependable snap-in vertical test jack features a unique spring shank which retains the jack throughout wave soldering procedure. Ideal for use on circuit boards of audio, digital and R.F. circuitry. Contact recessed to prevent accidental shorting. Current rating: 5 Amps. Operating voltage 1500 Volts RMS. Capacitance between two adjacent jacks less than 1.0 pF at 1 MHz.

MOUNTING: Snap-fits into .052 hole

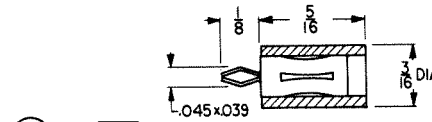

ACTUAL SIZE

SELECTION OF COLORS

CAT. NO.	COLOR
6042	WHITE
6043	RED
6044	BLACK
6045	YELLOW
6046	GREEN
6047	BLUE



**MATERIAL**

Body: Nylon per ASTM D4066  
Contact: Beryllium Copper, Silver Plate

## MINIATURE HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

Space saver test jack designed for use where space is a limiting factor. Half the size of standard jacks. Accepts .080" tip plug in either end. Mounts on .200" centers in .052" holes. Can be spaced side by side on .160" centers minimum. Two common terminals. Current: 5 Amps. Breakdown voltage: 2100 VRMS, Capacitance 1.0 pF maximum.

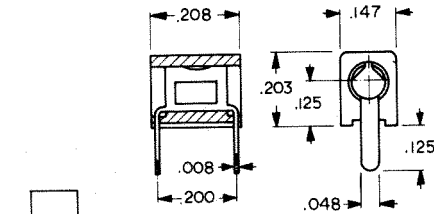

ACTUAL SIZE

SELECTION OF COLORS

CAT. NO.	COLOR
6048	WHITE
6049	RED
6050	BLACK
6051	YELLOW
6052	GREEN
6053	BLUE




**MATERIAL**

Body: Nylon per ASTM D4066  
Contact: Beryllium Copper Silver Plate

## UNIVERSAL HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

This universal design accepts .080" tip plug in either end, or from top or bottom. Top contact will also accept hook-type oscilloscope probe. Two common terminals. Current rating: 5 Amps. Breakdown voltage: 2100 VRMS. Capacitance 1.0 pF maximum. Mounts on .400" centers in .052" holes. Side by side mounting on .160" centers.

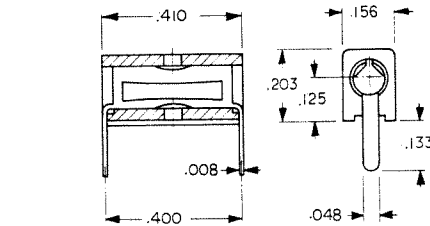

ACTUAL SIZE

SELECTION OF COLORS

CAT. NO.	COLOR
6054	WHITE
6055	RED
6056	BLACK
6057	YELLOW
6058	GREEN
6059	BLUE

**MATERIAL**

Body: Nylon per ASTM D4066  
Contact: Beryllium Copper Silver Plate

## LOW PROFILE HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

This low profile double-entry design is recognized for its dependability, and allows dense packaging on .160" centers. Side by side mounting. Closed entry design for use with .074 to .084 dia. tips. Reliability is designed into this rugged low cost jack. Mounts on .400" centers in .052" holes. Current rating: 5 Amps. Breakdown voltage 2100 VRMS. Contact resistance .010Ω maximum.

**MATERIAL**

Body: Nylon per ASTM D4066  
Contact: Beryllium Copper, Silver or Gold Plate





Choice of Gold or Silver Plate Contacts

WITH GOLD PLATING  
SELECTION OF COLORS

CAT. NO.	COLOR
6060	WHITE
6061	RED
6062	BLACK
6063	YELLOW
6064	GREEN
6065	BLUE

WITH SILVER PLATING  
SELECTION OF COLORS

CAT. NO.	COLOR
6066	WHITE
6067	RED
6068	BLACK
6069	YELLOW
6070	GREEN
6071	BLUE



ACTUAL SIZE