

# Banana Plug - Insulated Stacking Single Type

## SPECIFICATIONS

**Plug Body:** Brass per QQ-B-626D

**Plug Spring:** Nickel silver per QQ-C-585

**Finish:** Nickel


**Insulated Handle:** Nylon 6/6 per ASTM D4066

## RATINGS

**Current:** 15 amps

**Breakdown Voltage:** 3500 Vrms minimum †

**Contact Resistance:** 0.010 ohms maximum

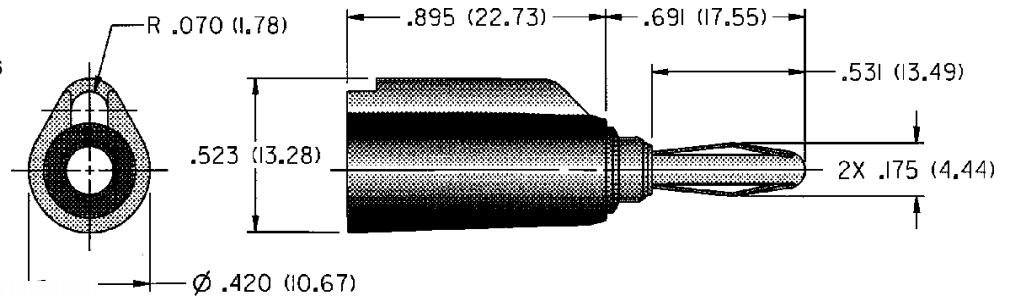

<b>NICKEL PLATING</b>
108-1082-001 Red

**For Standard Banana Jack: .166 (4.23) Diameter**

## FEATURES:

- Built in strain relief for long life
- Solder stud accepts up to 16 gauge wire
- Accepts standard banana plug from rear
- Nylon UL approved for self extinguishing