


Specifications
 Rating: 12V DC @ 1A
 Contact Resistance: 30 mOHMS Max
 Insulation Resistance: 100 MOHMS Min @ 500VDC.
 Dielectric Withstand Voltage: 500VAC for 1 Minute.
 Life: 5,000 Cycles

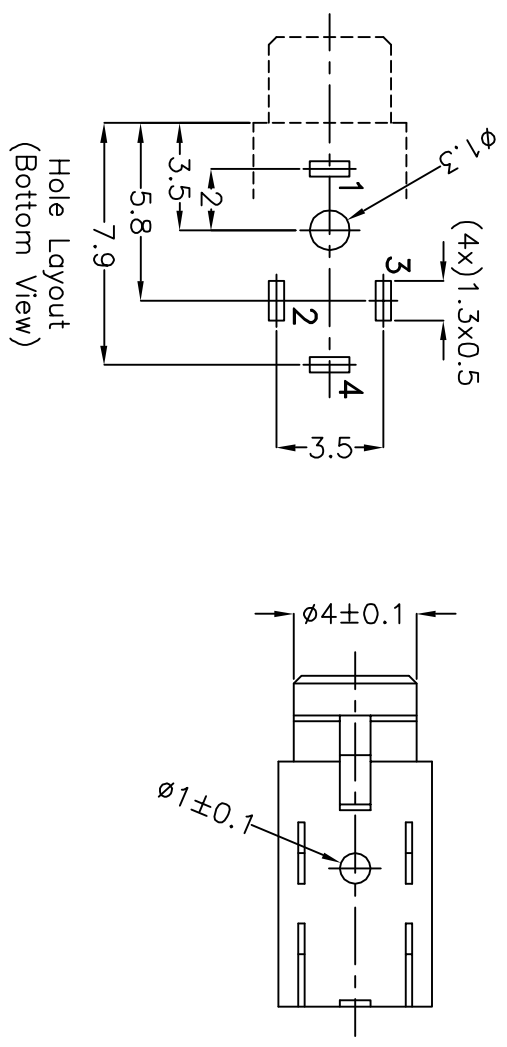

| Item | Description | Material | Qty | Finish |
|------|-------------|----------------------|-----|---------------|
| 6. | Bushing | Brass | 1 | Nickel Plated |
| 5. | Housing | POM | 1 | Black Color |
| 4. | Ring Spring | 0.2T Phosphor Bronze | 1 | Silver Plated |
| 3. | Tip Spring | 0.2T Phosphor Bronze | 1 | Silver Plated |
| 2. | Tip Spring | 0.2T Phosphor Bronze | 1 | Silver Plated |
| 1. | Ground | 0.2T Brass | 1 | Silver Plated |

CUI INC
 9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 372-1266
 Website: www.cui.com

TITLE:
 2.5mm AUDIO JACK-STEREO

PART NO.: SJ-2503A **UNITS:** Millimeters

DRAWN BY: Todd R. White **APPROVED BY:** **SCALE:** 4x