



- Specifications:
1. Insulation Resistance: 100MΩhms min. (initial)
  2. Contact Resistance (initial): 30mΩhms max at 100mA(max) 1KHz.
  3. Dielectric Withstand Voltage: AC 250V, 50 to 60Hz for 1 minute.
  4. Endurance: 5,000 Cycles 10 ~ 20 cycles per minute.
  5. Rated Voltage: 20.0 Volts DC
  6. Rated Current: 2.5 Amps DC
  7. Operating Temp: -25 to +85 deg. C.

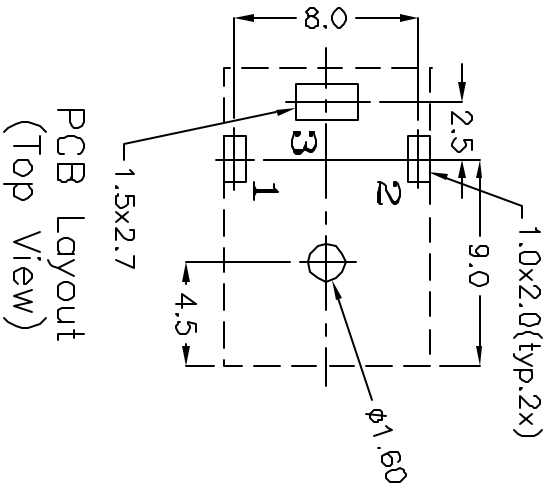

No.	Description	Material	Finish	Qty	Remark
4	Center Pin	Brass	Tin	1	φ1.65
3	Shunt Terminal	Brass	Tin	1	40T
2	Spring Contact	Copper Alloy	Tin	1	25T
1	Plastic Housing	PBT	Black Color	1	UL94V-0

**CUI INC**  
 9815 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-276-4899  
 Fax: (503) 372-1266  
 Website: www.cui.com

PC FILE NAME: PJ-Q21.dwg COPYRIGHT 2001 BY CUI INC.

TITLE: **φ1.65 DC Power Jack, PCB Mount**

PART NO. PJ-Q21 UNITS: Millimeters

DRAWN BY: Todd White APPROVED BY: SCALE: 3x