
Pomona®

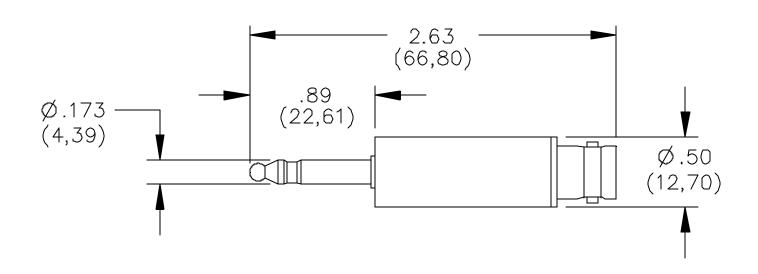

FEATURES:

- Converts Bantam jacks to BNC for coaxial cable compatibility
- BNC shell is tarnish resistant
- BNC materials include gold plated Beryllium Copper for superior electrical performance
- Schematic: Tip to BNC center conductor, ring to BNC Shell, sleeve floating

MATERIALS:

BNC: Body - Brass, nickel plated Center Contact – Beryllium Copper, gold plated Insulation: ABS, molded to BNC receptacle and plug, color: black Bantam Plug: Brass

RATINGS:

Operating Temperature: +50°C (+122°F) Operating Voltage: 500 V Peak

ORDERING INFORMATION: Model 4719

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (.51 mm), $.xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 6/10/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d4719_1_02.doc