



LOC	DIST	REVISIONS		
J		変更	DATE	DWN
		DESCRIPTION	APVD	
			01FEB08	T.T
		REVISED ECR-07-031084		T.F

AS SHOWN: TYPE-1


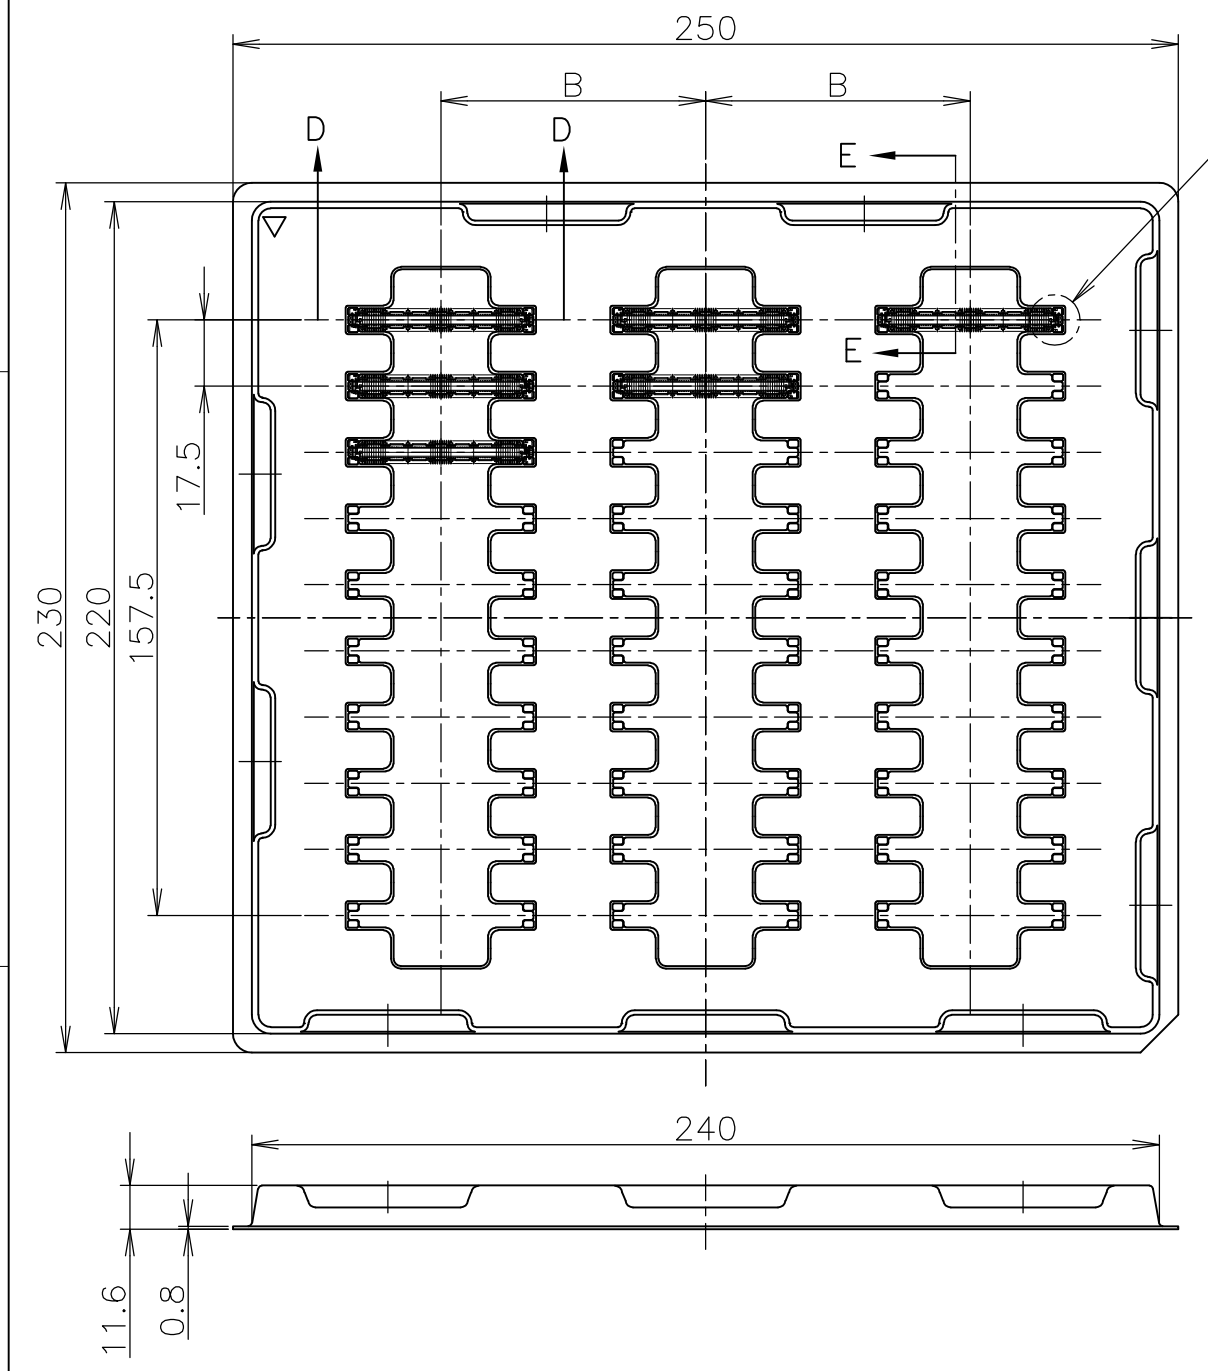


DETAIL C

△ TRAY TYPE-1 AND TYPE-2 MUST BE PILED UP BY TURNS. (REFER TO PACKING SPECIFICATIONS)

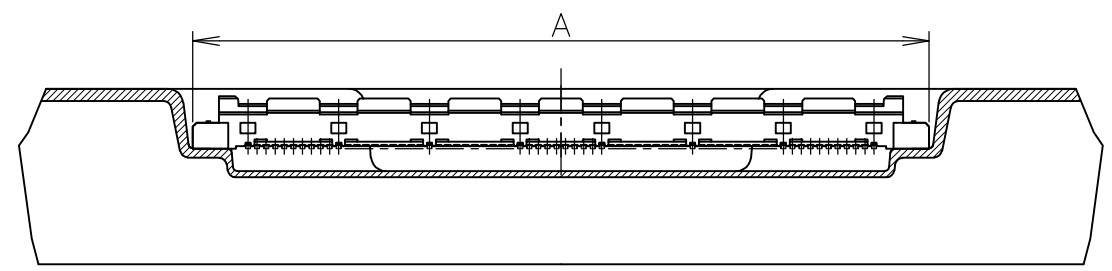

D-D (SCALE 2:1)

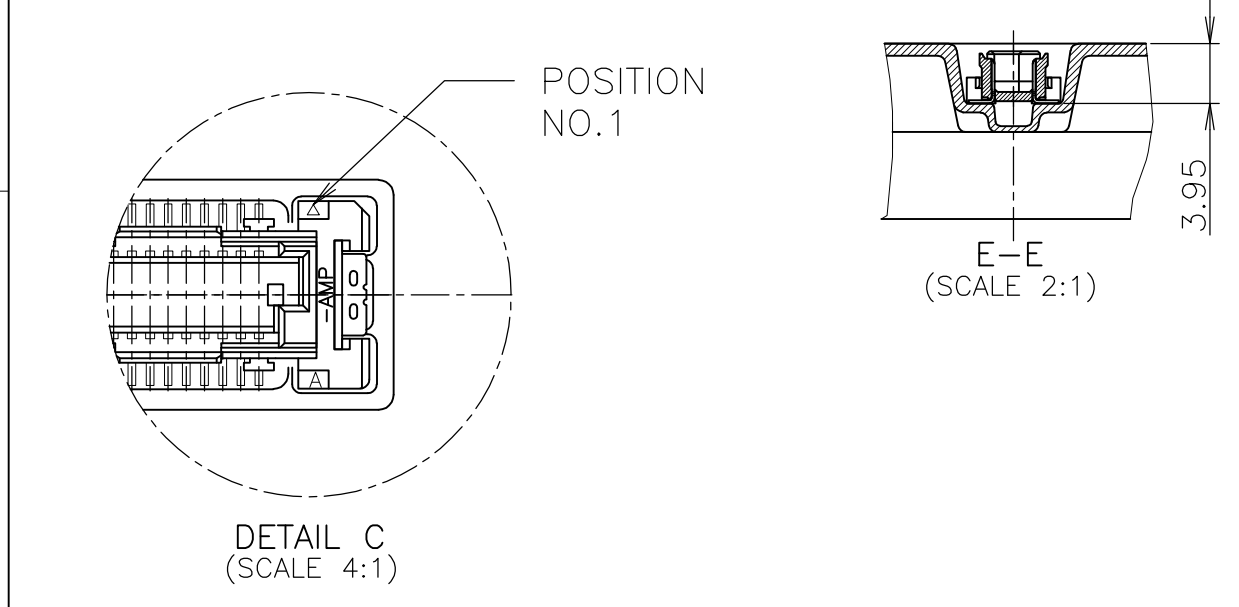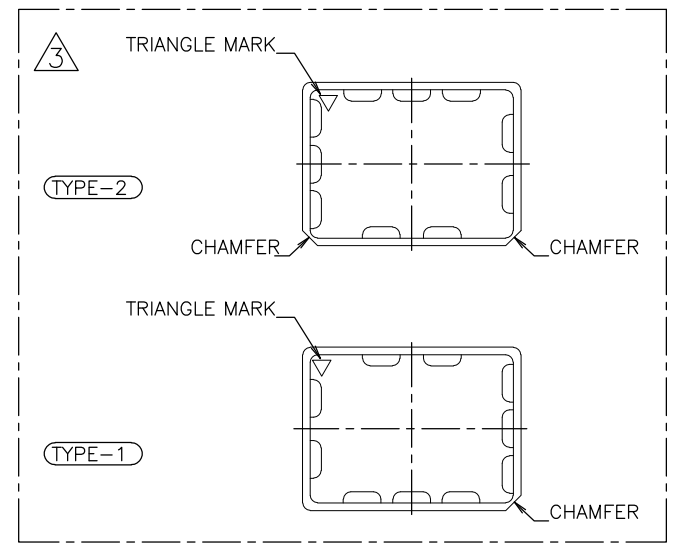

SEALANT	STATUS	TOOLING STATUS	ROW	QTY	B	A	POS.	TRAY P/N	PART NO.
	OBSOLETE	NOT AVAILABLE	3	30	70	54.7	160	912063-9	6-316135-1
						48.7	140	912063-8	6- -0
						42.7	120	4-912065-9	5- -9
						36.7	100	8-912066-2	5- -8
			3	30	70	33.7	90	9-912066-6	5- -7
			5	50	43	30.7	80	912067-3	5- -6
						27.7	70	912063-1	5- -5
						24.7	60	9-912066-5	5- -4
						21.7	50	9-912062-9	5- -3
						18.7	40	9-912066-4	5- -2
	OBSOLETE	NOT AVAILABLE	5	50	43	15.7	30	9-912066-3	5-316135-1
	ACTIVE	AVAILABLE	3	30	70	54.7	160	912063-9	1-316135-1
	ACTIVE	AVAILABLE				48.7	140	912063-8	1- -0
	OBSOLETE	NOT AVAILABLE				42.7	120	4-912065-9	-9
			3	30	70	36.7	100	8-912066-2	-8
						33.7	90	9-912066-6	-7
	OBSOLETE	NOT AVAILABLE	5	50	43	30.7	80	912067-3	-6
	ACTIVE	AVAILABLE				27.7	70	912063-1	-5
	OBSOLETE	NOT AVAILABLE				24.7	60	9-912066-5	-4
	ACTIVE	AVAILABLE				21.7	50	9-912062-9	-3
	OBSOLETE	NOT AVAILABLE				18.7	40	9-912066-4	-2
	OBSOLETE	NOT AVAILABLE	5	50	43	15.7	30	9-912066-3	316135-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T.KUSUHARA 11MAY95
CHK I.ENOMOTO 19MAY95
APVD I.ENOMOTO 19MAY02

Tyco Electronics Tyco Electronics Corporation
Kawasaki, Japan

NAME 製品規格
108-5468

PRODUCT SPEC
APPLICATION SPEC
取付適用規格






SIZE A3 CAGE CODE 00779 DRAWING NO. G-316135 RESTRICTED TO

MATERIAL 材料 FINISH 仕上 WEIGHT CUSTOMER DRAWING

SCALE 1:2 SHEET 1 OF 2 REV J

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY, 1995.
 © COPYRIGHT 1995 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
J		P	LTR	DESCRIPTION
				DATE
				DWN
				APVD
		SEE SHEET 1		

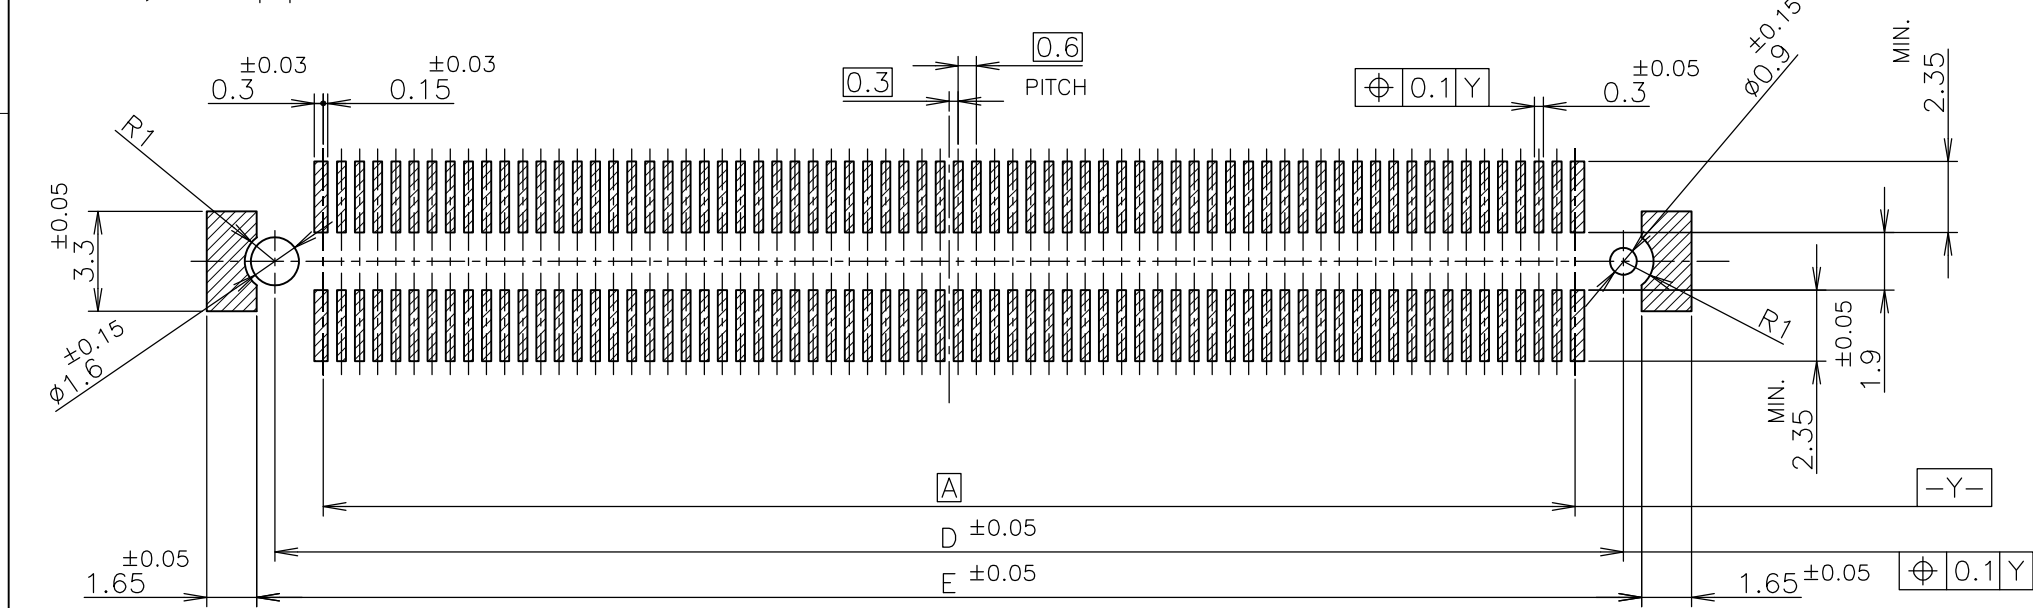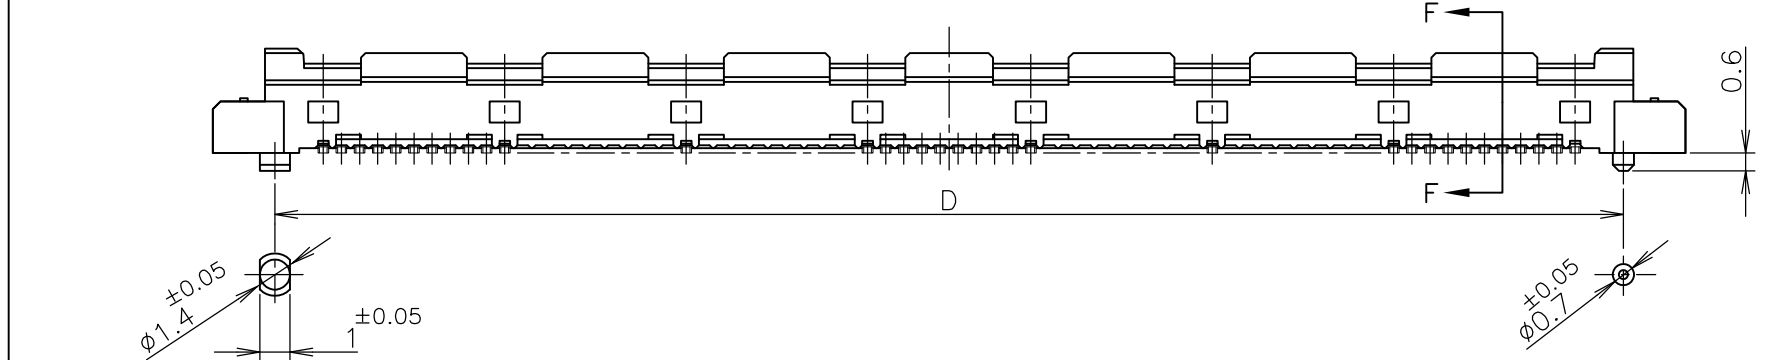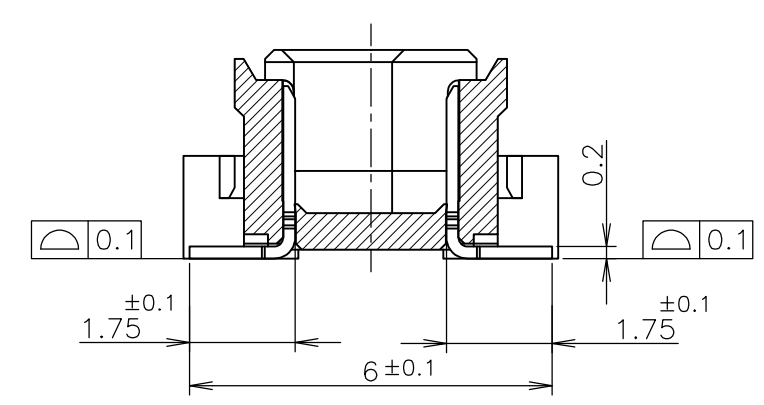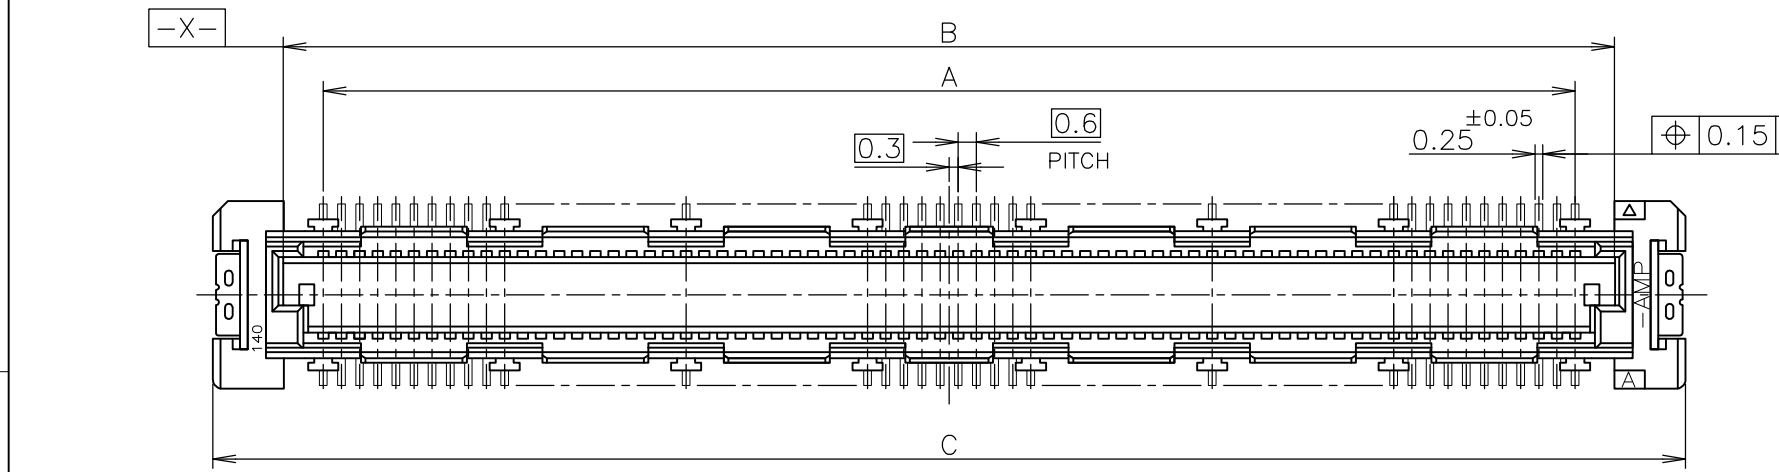

△ MATERIAL ; HOUSING : HIGH TEMP THERMO PLASTIC UL94V-0
 CONTACT : COPPER ALLOY
 △ FINISH ; UNDER PL Ni 0.0013mm MIN ALL OVER.
 CONTACTING AREA 0.0002 MIN Au PL.
 SOLDERING AREA 0.001 MIN Sn-Pb

REFERENCE P.C.BOARD LAYOUT

ACTIVE	AVAILABLE	51.8	50.6	54.7	50	47.4	160
ACTIVE	AVAILABLE	45.8	44.6	48.7	44	41.4	140
OBSOLETE	NOT AVAILABLE	39.8	38.6	42.7	38	35.4	120
ACTIVE	AVAILABLE	33.8	32.6	36.7	32	29.4	100
OBSOLETE	NOT AVAILABLE	30.8	29.6	33.7	29	26.4	90
OBSOLETE	NOT AVAILABLE	27.8	26.6	30.7	26	23.4	80
ACTIVE	AVAILABLE	24.8	23.6	27.7	23	20.4	70
ACTIVE	AVAILABLE	21.8	20.6	24.7	20	17.4	60
ACTIVE	AVAILABLE	18.8	17.6	21.7	17	14.4	50
OBSOLETE	NOT AVAILABLE	15.8	14.6	18.7	14	11.4	40
OBSOLETE	NOT AVAILABLE	12.8	11.6	15.7	11	8.4	30
STATUS	TOOLING STATUS	E	D	C	B	A	POS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK	NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	SOFT TRAY ASSY FH 0.6BTB CONNECTOR PLUG 4H STD	
0 PLC ± 0.3		PRODUCT SPEC 製品規格	SIZE	CAGE CODE
1 PLC ± 0.3		APPLICATION SPEC 取付適用規格	A3	00779
2 PLC ± 0.3		WEIGHT	DRAWING NO 番号	RESTRICTED TO
3 PLC ± 0.3		CUSTOMER DRAWING	G-316135	
4 PLC ± 0.3			SCALE 尺度 4:1	SHEET 2 OF 2
ANGLES ± 3'			REV J	
FINISH 仕上				