



LOC	DIST	REVISIONS					
J		P	LTR	DESCRIPTION	DATE	DWN	APVD
		F	REVISED	FJB0-0063-05	25JAN05	J.Z	I.E


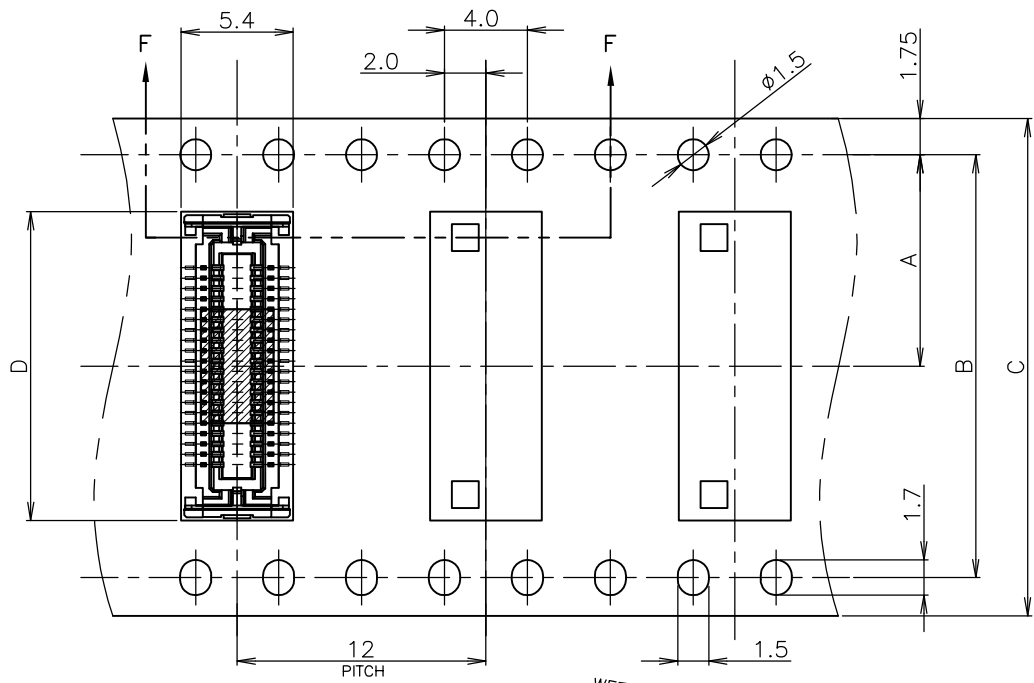


TAPE WIDTH

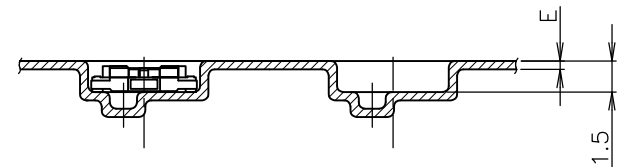

F-F


TOP OF REEL →

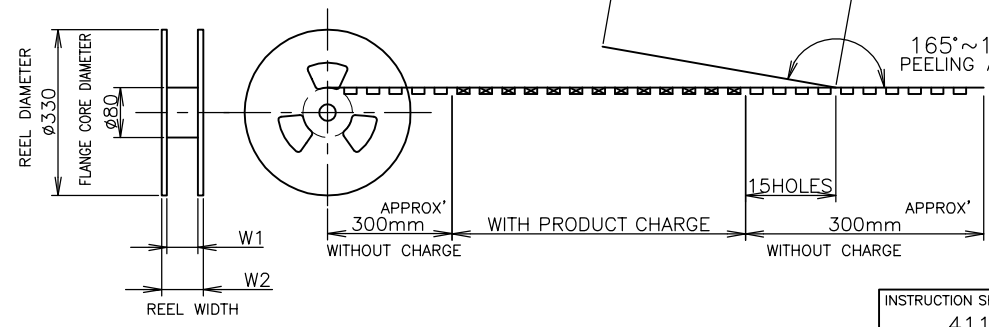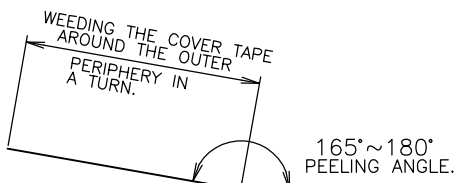


48.7	45.5	0.4	24.9	44	40.4	20.2	1500	80	8-353158-0	8-353159-0
48.7	45.5	0.4	22.4	44	40.4	20.2	1500	70	7-353158-5	7-353159-5
48.7	45.5	0.4	22.4	44	40.4	20.2	1500	70	7-353158-0	7-353159-0
W <sub>2</sub>	W <sub>1</sub>	E	D	C	B	A	QTY/REEL	POS	CONNECTOR P/N (L/P)	TAPING P/N

INSTRUCTION SHEET 411-5781		DIMENSIONS		DWN S.KAJINUMA 05JUN96		Tyco Electronics AMP K.K. Kawasaki, Japan	
THIS DRAWING IS A CONTROLLED DOCUMENT.		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK K.ASAKAWA 20AUG98		NAME	
DIMENSIONS: MM		0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 0.2 3 PLC ± 0.2 4 PLC ± 0.2 ANGLES ± 3'		APVD S.KUBOUCHI 20AUG98		ON TAPING (EMBOSS) 0.5mm PITCH FS CONN. RECEPTACLE ASSEMBLY WITH FILM	
MATERIAL		FINISH		PRODUCT SPEC 108-5546		RESTRICTED TO	
				APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
				WEIGHT		A3 00779 C=353159	
				CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 2 REV F	

LOC	DIST	REVISIONS		
J		P	LTR	DESCRIPTION
		-	-	SEE SHEET 1
				DATE
				DWN
				APVD

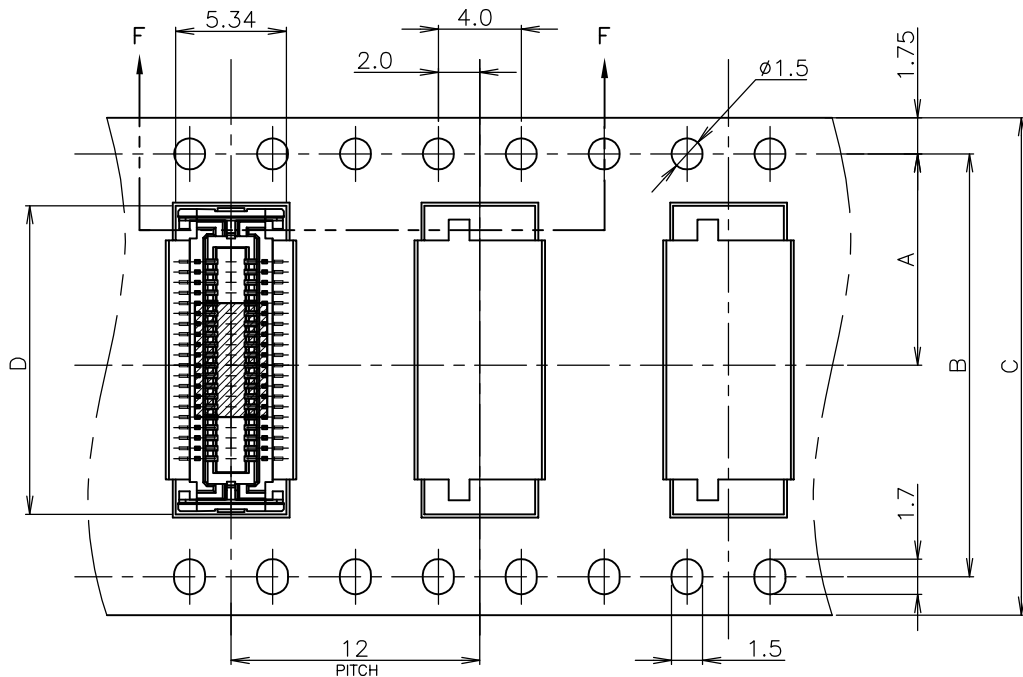


TAPE WIDTH

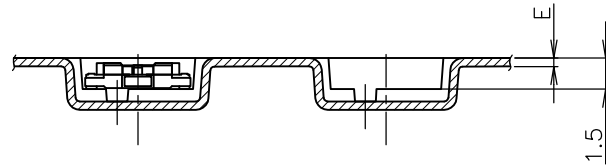

F-F

TOP OF REEL →

WEEDING THE COVER TAPE AROUND THE OUTER PERIPHERY IN A TURN.  
165°~180° PEELING ANGLE.

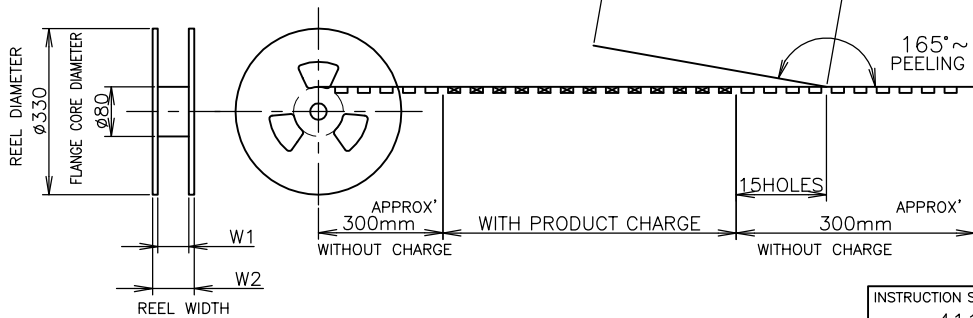

37.5	33.5	0.4	19.85	32	28.4	14.2	1500	60	6-353158-0	6-353159-0
W <sub>2</sub>	W <sub>1</sub>	E	D	C	B	A	QTY/REEL	POS	CONNECTOR P/N (L/P)	TAPING P/N

INSTRUCTION SHEET 411-5781		DWN S.KAJINUMA 05JUN96		Tyco Electronics AMP K.K. Kawasaki, Japan	
THIS DRAWING IS A CONTROLLED DOCUMENT.		CHK K.ASAKAWA 20AUG98		Tyco Electronics	
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± 0.2		1 PLC ± 0.2		S.KUBOUCHI 20AUG98	
2 PLC ± 0.2		3 PLC ± 0.2		PRODUCT SPEC	
3 PLC ± 0.2		4 PLC ± 0.2		108-5546	
ANGLES ± 3'		FINISH		APPLICATION SPEC	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
				A3 00779 C=353159	
CUSTOMER DRAWING				RESTRICTED TO	
SCALE 4:1				SHEET 2 OF 2 REV F	