


REVISION Z
DO NOT SCALE
FROM THIS PRINT

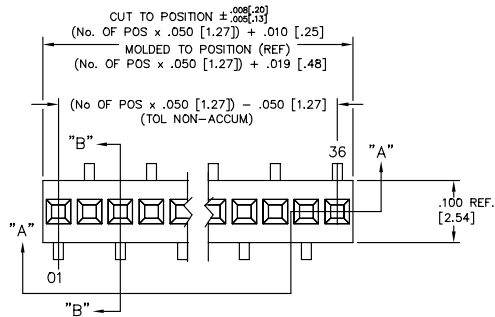

SECT: "A-A"



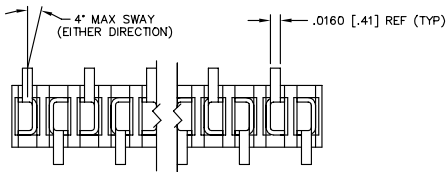


FIG. 1

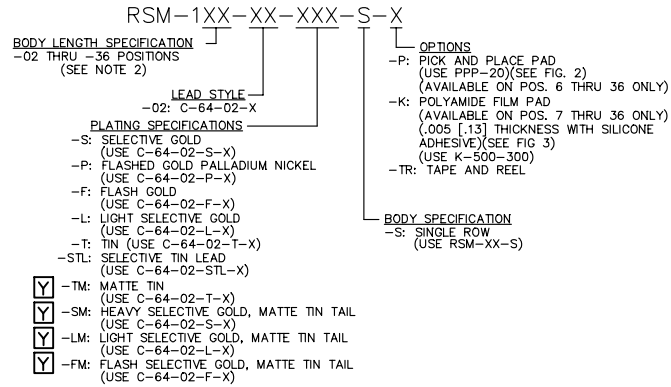

IN-PROCESS VIEW




USER DIRECTION OF UNREELING

POCKET NOT DETAILED

FIG. 4

-TR: TAPE AND REEL

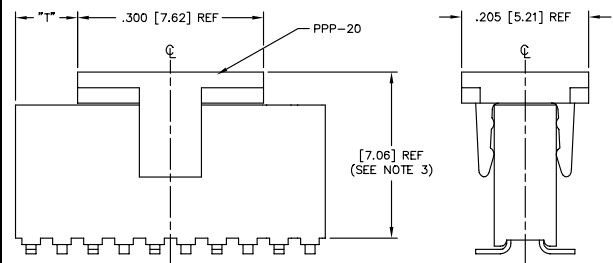



"R" = USE MEASURED DIMENSION (REF)
"T" = {("R" - .300)/2} ±.020

FIG. 2

-P: PICK AND PLACE PAD
AVAILABLE ON POS 6 - 36 ONLY

- NOTES:
- PIN ONE TO BE IN DIRECTION OF ARROW ON TUBE
 - FOR ODD POSITIONS, LOSE ONE PIN PER CUT FOR EVEN POSITIONS, LOSE TWO PINS PER CUT
 - MEASURED AT BEND RADIUS
 - MINIMUM RETENTION: 1.0 LB.
 - CUT FLASH TO BE .010" MAX WITH NO FLASH. ALLOW IN HOLES OR EXTENDING BELOW LEADS.
 - CONTACTS NOT TO BE INTERLEAVED.
 - ⊗ REPRESENTS A CRITICAL DIMENSION.

OPTION	TUBE	PLUG
-P	PT-1-24-01-14	TP-03
-	PT-1-24-03-64	TP-24
-K	PT-1-24-03-64	TP-24



PROPRIETARY NOTE
THIS DOCUMENT CONTAINS SAMTEC'S
CONFIDENTIAL AND PROPRIETARY
INFORMATION. IT IS TO BE USED
ONLY FOR THE PURPOSES
SPECIFIED IN THE ORDER.
IT IS NOT TO BE REPRODUCED,
COPIED, OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS,
ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING,
RECORDING, OR BY ANY
INFORMATION STORAGE AND
RETRIEVAL SYSTEM, WITHOUT
THE WRITTEN CONSENT OF SAMTEC.

FIG. 3
-K: POLYAMIDE FILM PAD
AVAILABLE ON POS 7 - 36 ONLY