


REV. V

DIMENSIONS ARE IN INCHES		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS ± .1	THREE PLACE DECIMALS ± .005	FOUR PLACE DECIMALS ± .0020	ANGLES ± 2°	DUAL ROW .050 x .050 STRIP ASSEMBLY	FLE-1XX-XX-XX-DV-X
				SHEET 1 OF 2	

DO NOT SCALE FROM THIS PRINT

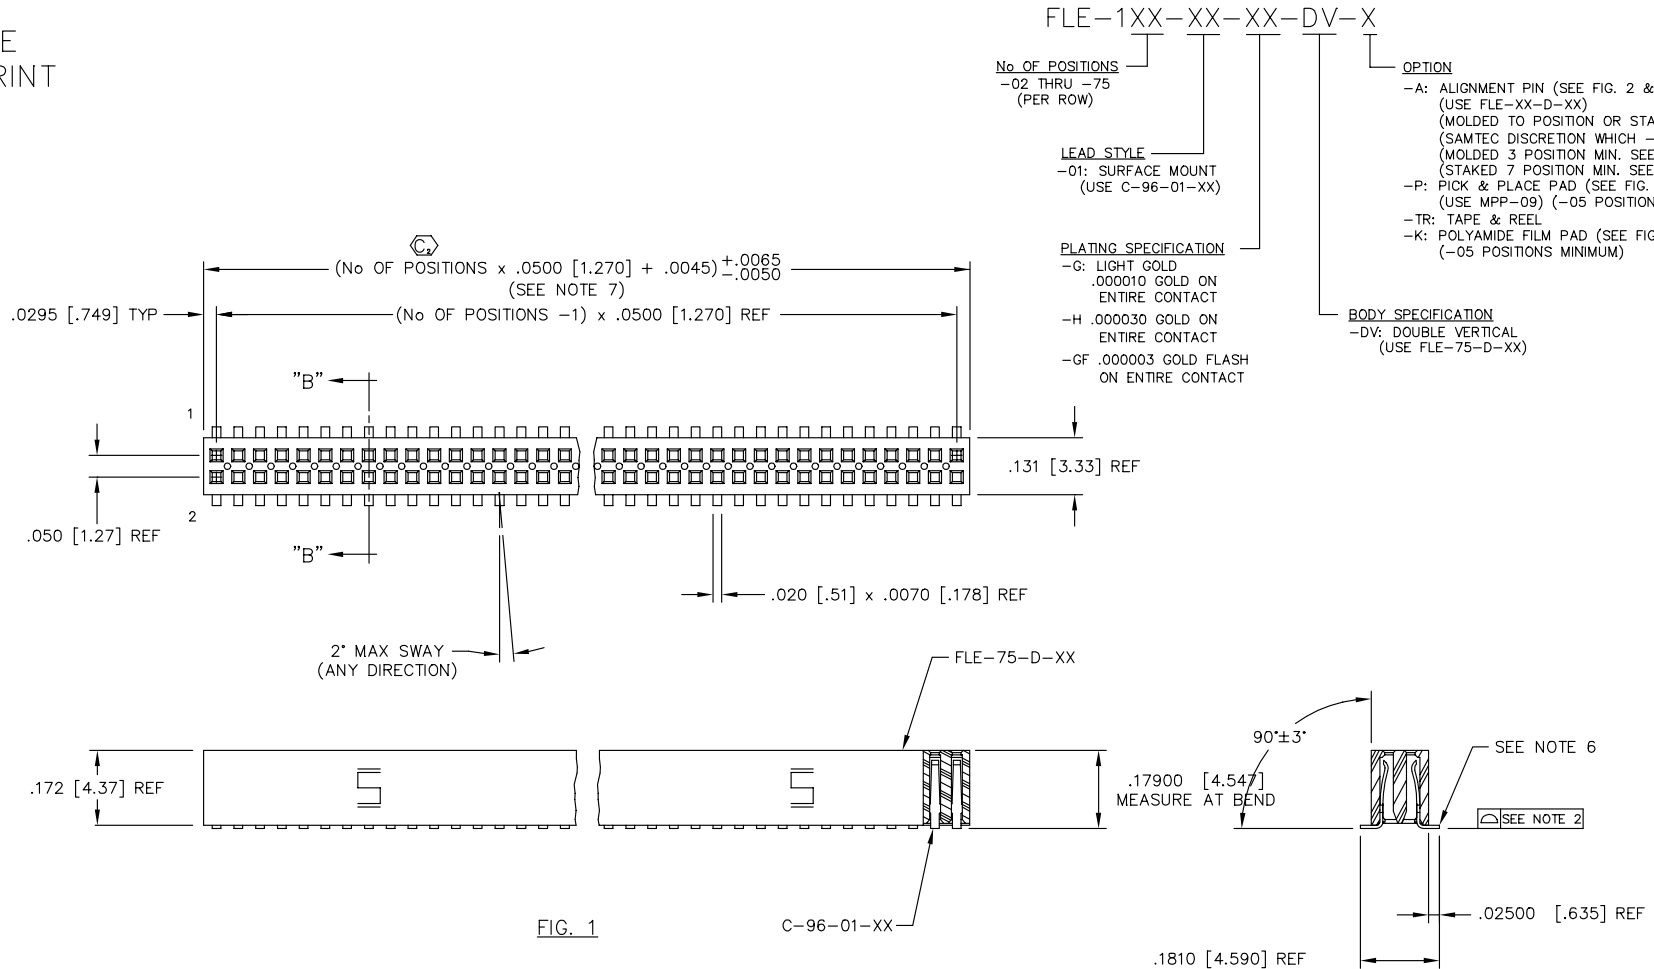

- NOTES:
1. MINIMUM PUSHOUT FORCE: .5 lb.
  2. COPLANARITY; POS -5 THRU -26: .004  
POS -27 THRU -75: .006
  3. (C) REPRESENTS A CRITICAL DIMENSION.
  4. PACKAGE POSITIONS -05 THRU -75 IN TUBES; LAYER PACKAGE POSITIONS -02 THRU -04.
  5. FOR EVERY FINISHED PART, ONE POSITION WILL BE LOST WHEN CUTTING BODY TO LENGTH.
  6. BURR ALLOWANCE: .003 [.08] MAX.
  7. CUT FLASH TO BE .010 [.25] MAX WITH NO FLASH ALLOWED IN HOLES OR EXTENDING BELOW LEADS.

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: .175/ DIMSCALE: .200

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY: D PURVIS 11-05-96

FLE-1XX-XX-XX-DV-X  
SHEET 1 OF 2