



# 322 SERIES CARD EDGE CONNECTOR

.156" (3.96mm) Contact Spacing

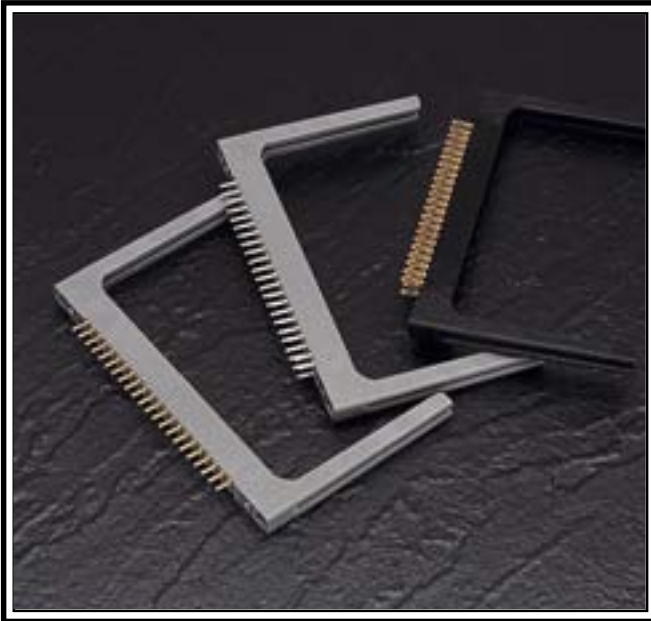

## 322 SERIES ORDERING CODE

Example Part Number **322 - 044 - 500 - 2 58**

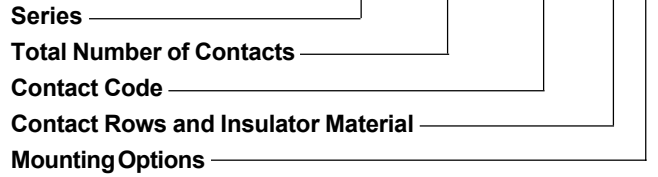

<b>Series</b>	322
<b>Total Number of Contacts</b>	022 044
<b>Contact Rows</b>	Single Row Dual Row

**Contact Code**  
See 307/357 Series for Available Contact Options and "G" Dimension

Contact Rows and Insulator Material	Description
1	Single Row, Grey Polycarbonate
2	Dual Row, Grey Polycarbonate
4	Single Row, Black Nylon
5	Dual Row, Black Nylon

Mounting Options	Description
54	.156 (3.96) Dia. x .300 (7.62) Deep Holes
57	M3-0.5 Metric Threaded Inserts
58	#4-40 Unified Threaded Inserts

## FEATURES

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Accepts Between Contact and In-Contact Polarizing Keys

## SPECIFICATIONS

- ◆ Insulator Material: Polycarbonate or Nylon, Glass Reinforced
- ◆ Contact Material: Copper, Nickel, Tin Alloy CA-725

- ◆ Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- ◆ Current Rating: 5 Amperes Continuous
- ◆ For Additional Specifications, Refer to 307/357 Series.

