


- MATERIAL:
CONNECTOR: POLYESTER UL94V-0 (RED).
CONTACTS: 0.30[.012] THK COPPER ALLOY.
 - CONTACT ACCEPT #22 AWG WIRE WITH 2.41[.095] MAXIMUM INSULATION DIAMETER.
 - CONNECTOR MATES WITH 1.57±0.20[.062±.008] THICK PC BOARD.
 - HOUSING FEATURES: FEED-THRU, STANDARD MOUTH WITHOUT MOUNTING EARS.
- △ CONTACT FINISH: BRIGHT TIN-LEAD 0.00203[.000080] MIN THK.
 △ CONTACT FINISH: MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN THICKNESS OVER NICKEL UNDERPLATE.

△	95.50 [3.760]	95.91 [3.776]	24	5-641285-4
	91.54 [3.604]	91.95 [3.620]	23	5-641285-3
	87.58 [3.448]	87.99 [3.464]	22	5-641285-2
	83.62 [3.292]	84.02 [3.308]	21	5-641285-1
	79.65 [3.136]	80.06 [3.152]	20	5-641285-0
	71.73 [2.824]	72.14 [2.840]	18	4-641285-8
	59.84 [2.356]	60.25 [2.372]	15	4-641285-5
	47.96 [1.888]	48.36 [1.904]	12	4-641285-2
	36.07 [1.420]	36.47 [1.436]	9	3-641285-9
	24.18 [.952]	24.59 [.968]	6	3-641285-6
	12.29 [.484]	12.70 [.500]	3	3-641285-3
	△	95.50 [3.760]	95.91 [3.776]	24
91.54 [3.604]		91.95 [3.620]	23	2-641285-3
87.58 [3.448]		87.99 [3.464]	22	2-641285-2
83.62 [3.292]		84.02 [3.308]	21	2-641285-1
79.65 [3.136]		80.06 [3.152]	20	2-641285-0
71.73 [2.824]		72.14 [2.840]	18	1-641285-8
59.84 [2.356]		60.25 [2.372]	15	1-641285-5
47.96 [1.888]		48.36 [1.904]	12	1-641285-2
36.07 [1.420]		36.47 [1.436]	9	641285-9
24.18 [.952]		24.59 [.968]	6	641285-6
12.29 [.484]		12.70 [.500]	3	641285-3
CONTACT FINISH		B	A	NO. OF CIRCUITS

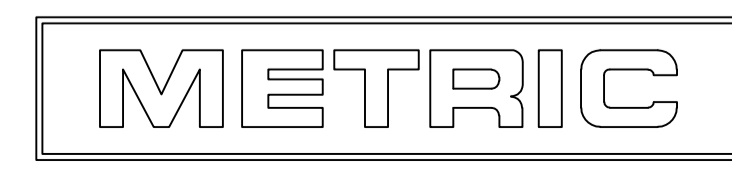

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN K. SALMON 10-29-91
 CHK R. SWING 10-29-91
 APVD

TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ± -
 1 PLC ± -
 2 PLC ± 0.13 [.005]
 3 PLC ± -
 4 PLC ± -
 ANGLES ± -

PRODUCT SPEC: MTA-156
 APPLICATION SPEC: CARD EDGE CONNECTOR ASSEMBLY, 22 AWG

SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 641285

RESTRICTED TO: -
 WEIGHT: -
 CUSTOMER DRAWING: -
 SCALE: 5:1
 SHEET: 1 of 1
 REV: L