

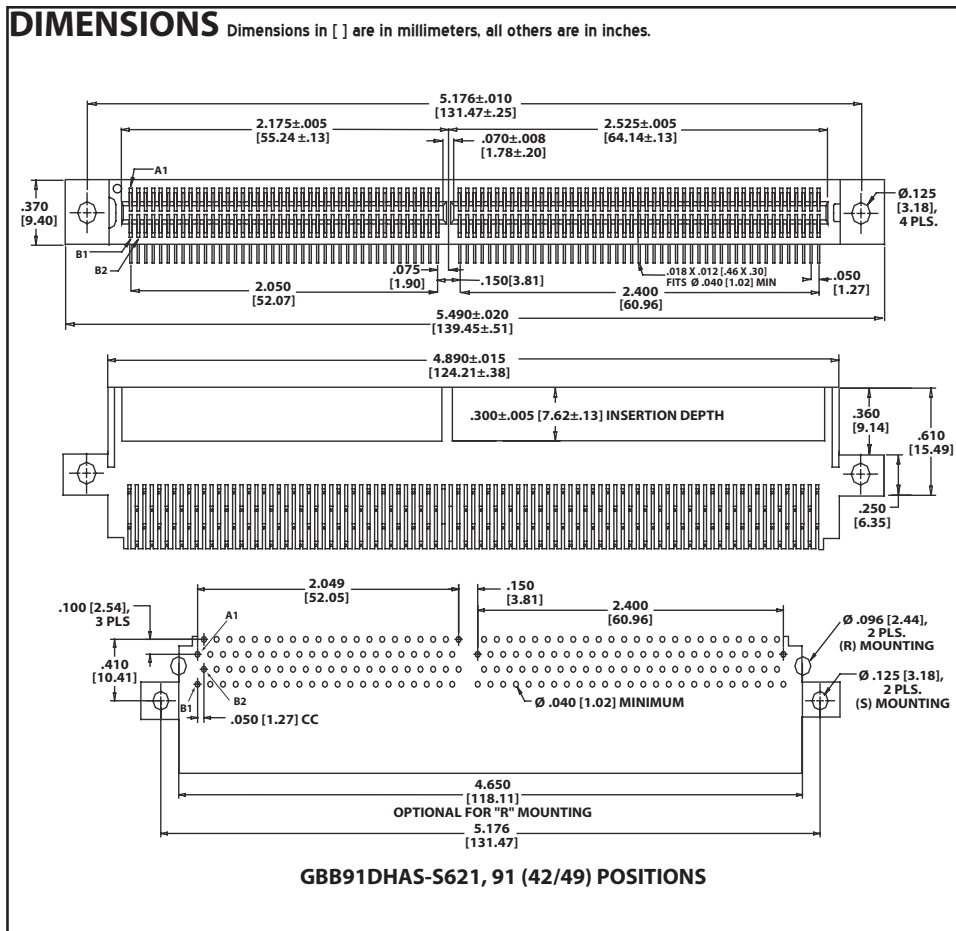


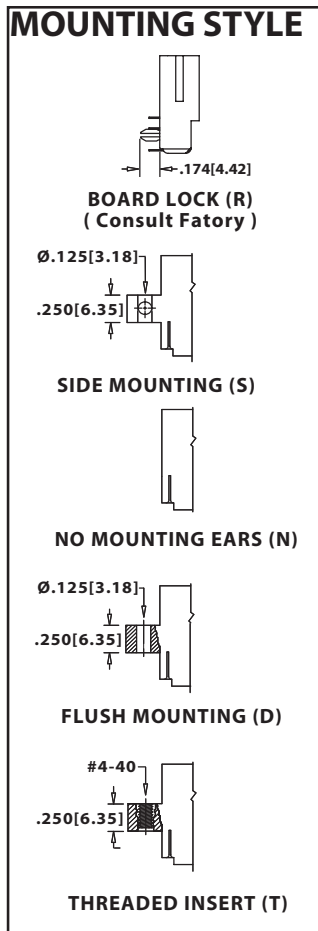

**.050" [1.27mm] Contact Centers, .915" Insulator Height
[MCA] Right Angle**

Industry Standard Part

Sullins Edgards

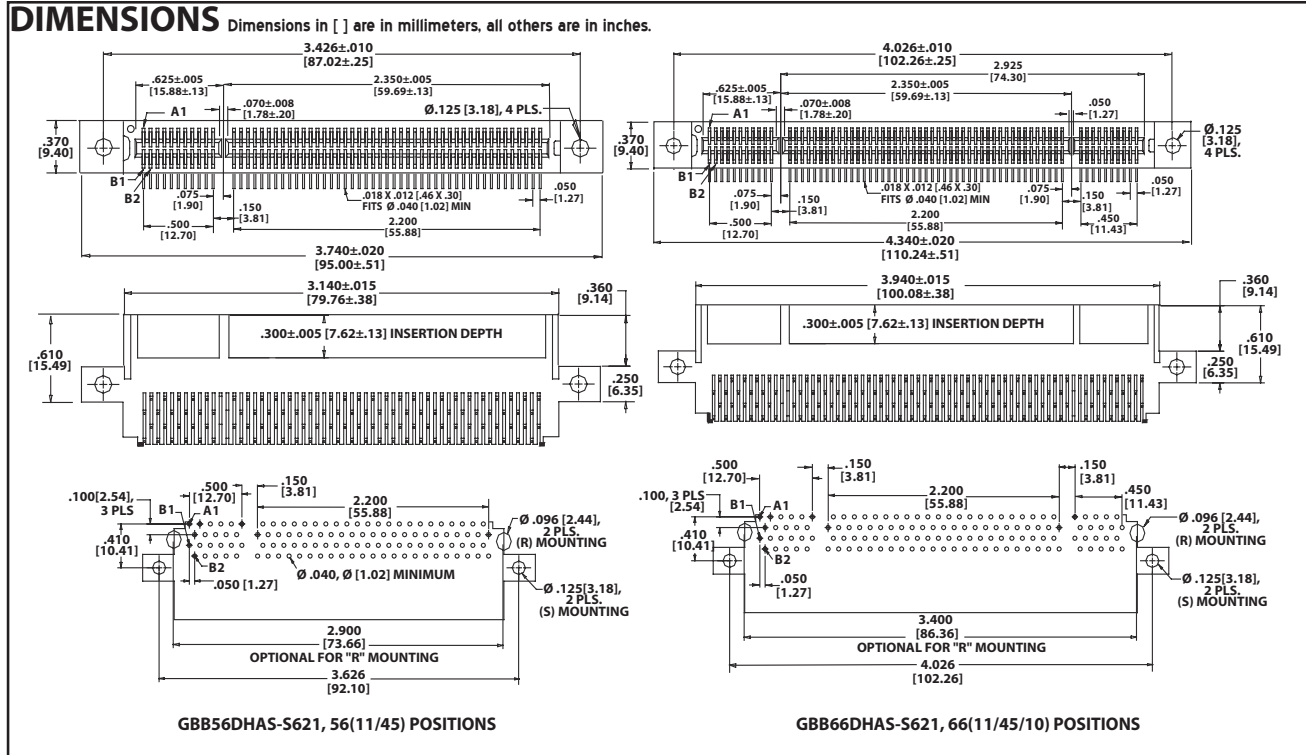



.050" [1.27mm] Contact Centers, .915" Insulator Height [MCA] Right Angle

Industry Standard Part

Sullins Edgecards

PART NUMBER CODING

MATERIALS (Insulator/Contact)

G = PA9T/Phosphor Bronze
 R = PPS/Phosphor Bronze
 J = PA9T/Beryllium Copper
 A = PPS/Beryllium Copper
 (Consult Factory for Other Materials)

CONTACT FINISH - RoHS Compliant
 All platings are Lead Free and have .000050" Nickel underplate

Contact Surface Termination

B = .00010" Gold .000100" Pure Tin, Matte
 C = .000030" Gold .000100" Pure Tin, Matte

CONTACT CENTERS

B = .050" [1.27mm]

MODIFICATION (CONSULT FACTORY)
 -S621 = Card Slot Barriers Without Guide Posts

MOUNTING STYLE (Opposite Page)

S = Side Mounting
 D = Flush Mounting
 N = No Mounting
 T = Flush Mounting With Threaded Insert
 R = Metal Board Lock

TERMINATION TYPE


HA = .100" [2.54] Staggered Dip Solder, Right Angle
 HB = .170" [4.32] Staggered Dip Solder, Right Angle

READOUT
 D = Dual

NUMBER OF CONTACT POSITIONS

56 = 11/45
 66 = 11/45/10
 91 = 42/49
 106 = 11/45/50

TERMINATION TYPE




SPECIFICATIONS

- Accommodates .062" ± .008" [1.57 ± .20] PC board
- PPS or PA9T insulator
- Molded-in key available
- High reliability/high cycle hairpin bellows contact
- 1 amp current rating per contact
- 150 grams normal force minimum

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

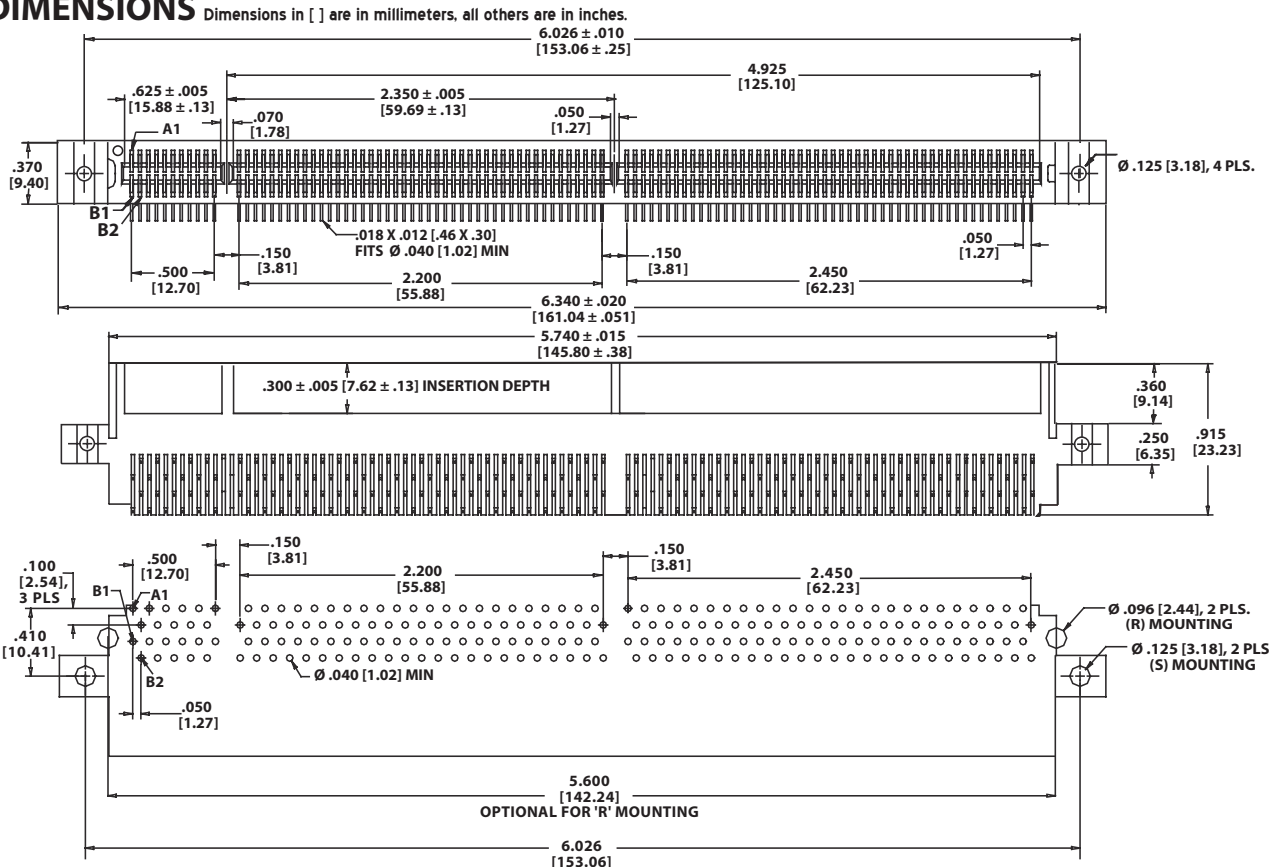

**BOARD LAYOUT, CONNECTOR SIDE
 GBB106DHAS-S621, 64 BIT, 5 VOLT**