



**.050" [1.27mm] Contact Centers, .915" Insulator Height
[PCI] Right Angle**


Industry Standard Part

SPECIFICATIONS

- Accommodates .062" ± .008" [1.57 ± .20] PC board
- PPS or PA9T insulator
- Molded-in key available
- High reliability/high cycle hairpin bellows contact
- 1 amp current rating per contact
- 150 grams normal force minimum


Sullins Edgcards

TERMINATION TYPE




DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

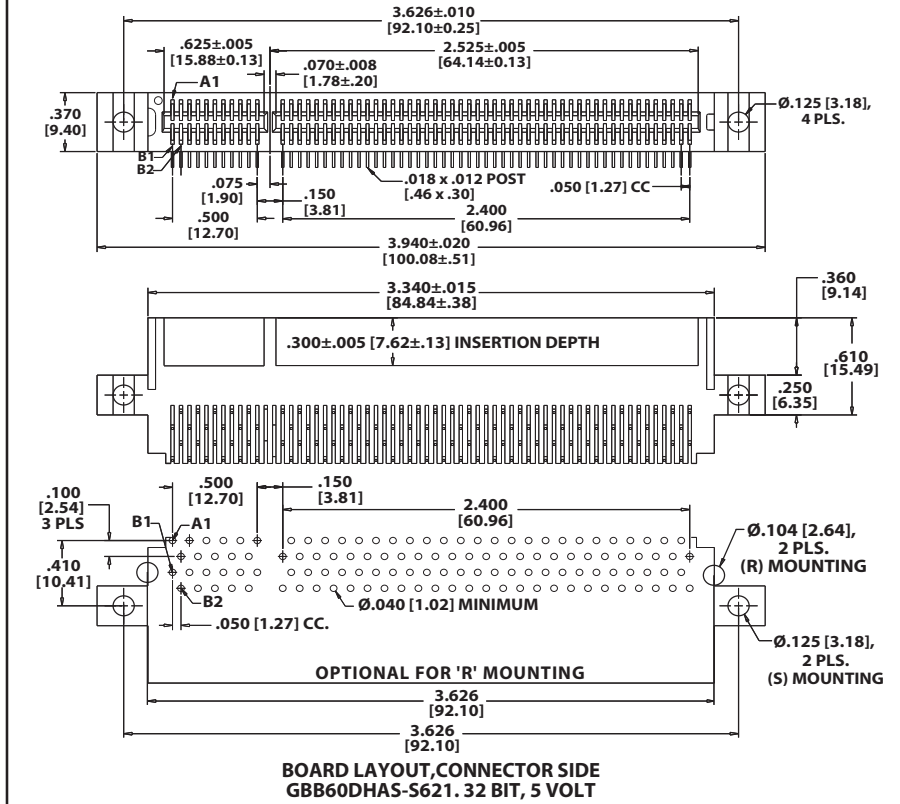

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

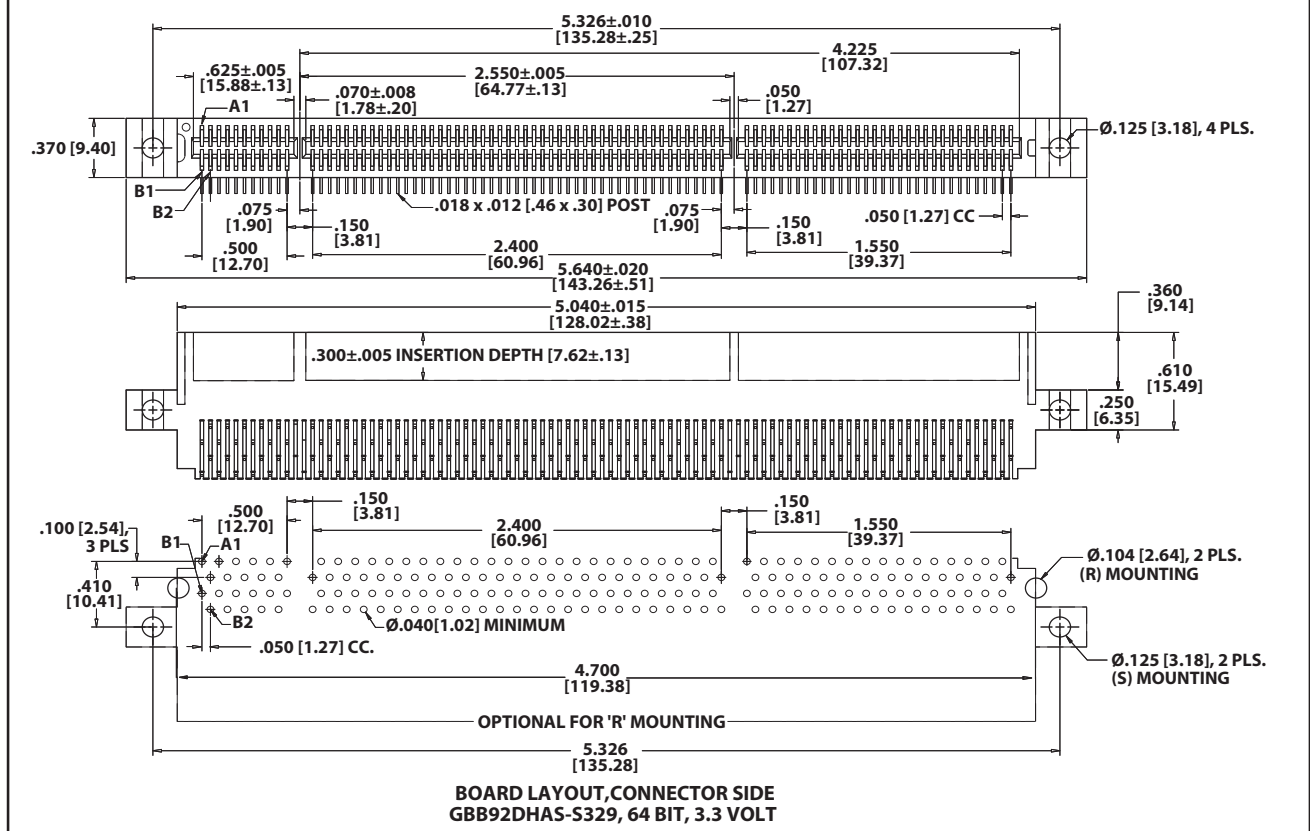



**.050" [1.27mm] Contact Centers, .915" Insulator Height
[PCI] Right Angle**

Industry Standard Part

Sullins Edgecards

PART NUMBER CODING

G B B 60 D HA D - S793

MATERIALS (Insulator/Contact)
 G = PA9T/Phosphor Bronze
 R = PPS/Phosphor Bronze
 J = PA9T/Beryllium Copper
 A = PPS/Beryllium Copper
 (Consult Factory for Other Materials)

CONTACT FINISH - RoHS Compliant
All platings are Lead Free and have .000050" Nickel underplate

Contact Surface	Termination
B = .000010" Gold	.000100" Pure Tin, Matte
C = .000030" Gold	.000100" Pure Tin, Matte

CONTACT CENTERS
 B = .050" [1.27mm]

NUMBER OF CONTACT POSITIONS
 60 = 11/49 (32 Bit, 3.3 or 5 Volt)
 92 = 11/49/32 (64 Bit, 3.3 Volt)
 or 92 = 49/11/32 (64 Bit, 5 Volt)

MODIFICATION (CONSULT FACTORY)
 -S793 = 60(49/11) Reverse Bend (32 Bit, 3.3 Volt)
 -S621 = 60(11/49) Positions (32 Bit, 5 Volt)
 -S329 = 92(11/49/32) Positions (64 Bit, 3.3 Volt)
 -S250 = 92(49/11/32) Positions (64 Bit, 5 Volt)


MOUNTING STYLE
 S = Side Mounting
 D = Flush Mounting
 N = No Mounting
 T = Flush Mounting With Threaded Insert
 R = Metal Board Lock

TERMINATION TYPE (Opposite Page)
 HA = .100" [2.54mm] Staggered Dip Solder
 HB = .170" [4.32mm] Staggered Dip Solder

READOUT
 D = Dual

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

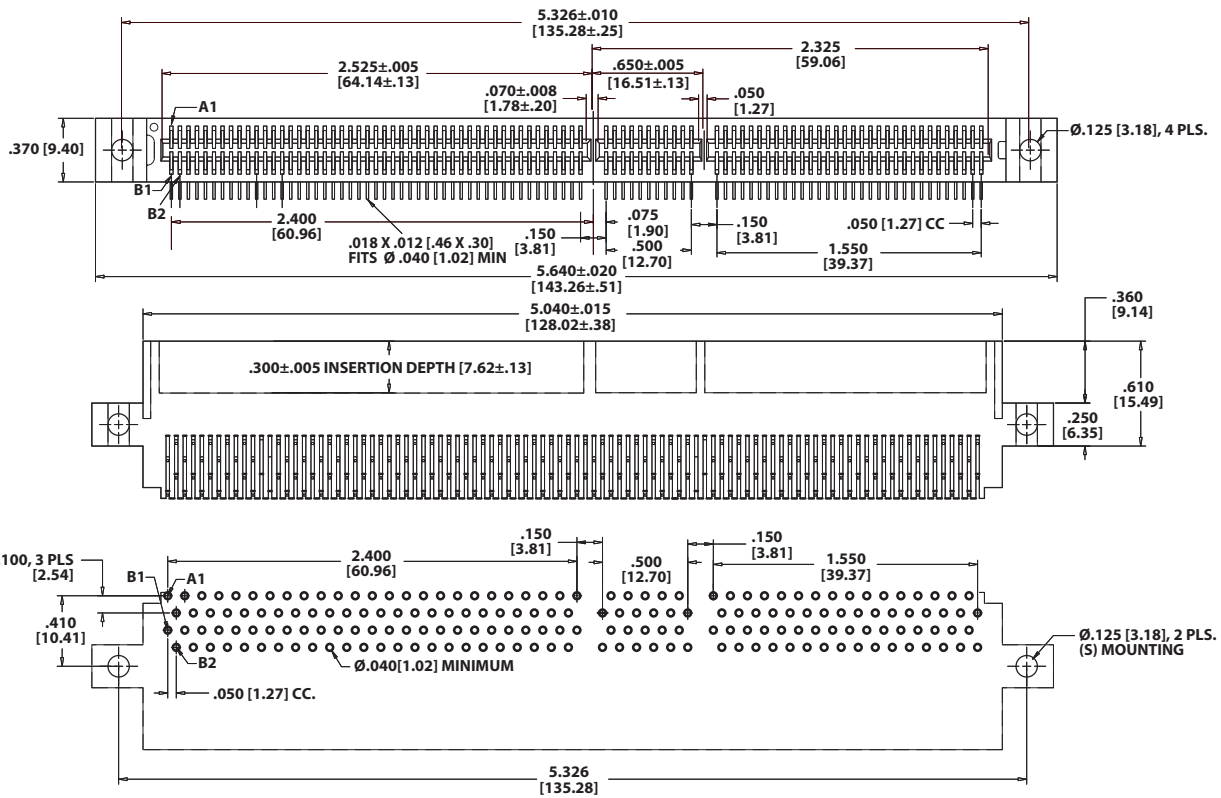

MOUNTING STYLE

