




**SULLINS ELECTRONICS  
CORP**

SAN MARCOS, CA 760-744-0125 FAX  
760-744-6081

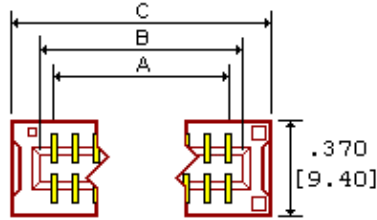

C = 0.740+-0.015 [18.80+-0.38]  
B = 0.550+-0.005 [13.97+-0.13]  
A = 0.450+-0.005 [11.43+-0.13]

>

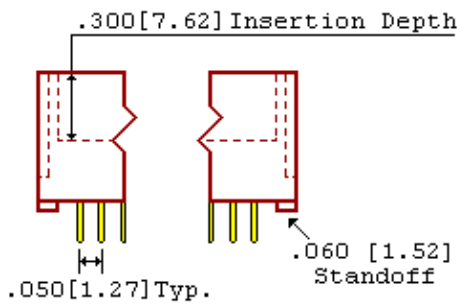

.012x.018 [.30x.46] Staggered Hairpin Bellows Contacts Not Shown



- 1.0 SPECIFICATIONS FOR A DUAL 10/20 POSITION EDGECARD CONNECTOR
- 2.0 INSULATION MATERIAL: BROWN RYTON
- 3.0 CONTACT MATERIAL: CA510 PHOSPHOR BRONZE GRADE C
- 4.0 TEMPERATURE: TO 125 DEGREES C CONTINUOUS
- 5.0 PLATING: .000010" GOLD ON HEADS, .000100" TIN ON TAILS, .000050" NICKEL UNDERPLATE
- 6.0 UL FLAMMABILITY RATING: 94V-0
- 7.0 VOLTAGE RATING: 125 VDC MINIMUM AT SEA LEVEL
- 8.0 CURRENT RATING: 1 AMPERE
- 9.0 INSULATION RESISTANCE: 1,000 MEGA OHMS
- 10.0 BOARD THICKNESS ACCOMMODATED: .054 INCH TO .074 INCH
- 11.0 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
- 12.0 NOT DRAWN TO SCALE

**PART NUMBER: RZB10DCHN**

**DATE:  
1-28-03**

[Print PDF](#)