

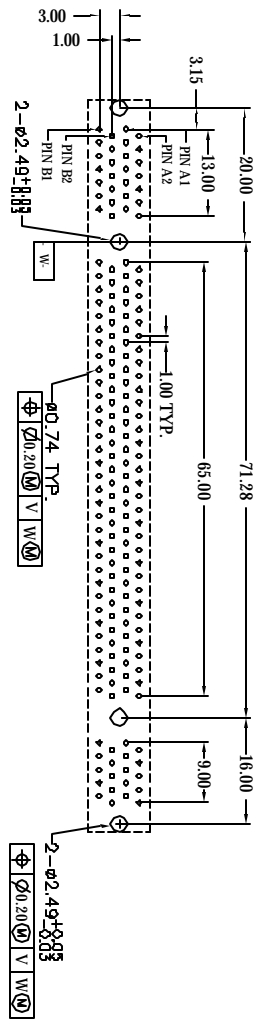

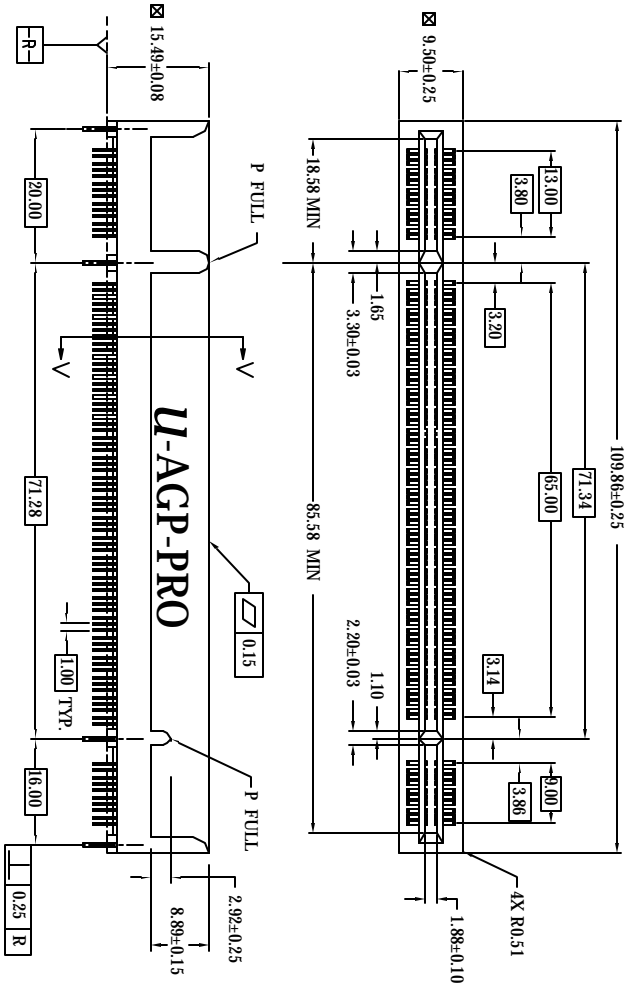


PRODUCT DRAWING

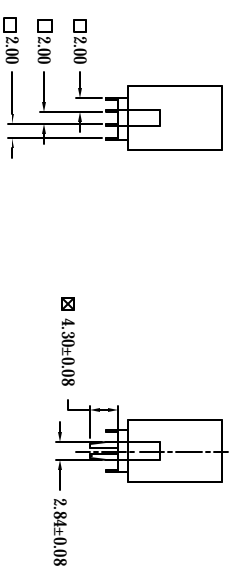

- * NOTE**
1. HOUSING MATERIAL: PBT
 2. CONTACT MATERIAL: PHOSPHOR BRONZE
 3. COLOR: BROWN
 4. PLATING: GOLD FLASH IN CONTACT AREA, TIN / LEAD ON SOLDER TAIL UNDERPLATE, 75µm / 30µ" MIN. NICKEL OVERALL

- * PERFORMANCE:**
1. CURRENT RATING: 1A
 2. CONTACT RESISTANCE: 30 MILLOHMS MAX.
 3. INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 4. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
 5. CAPACITANCE: 2PF MAX.
 6. VOLTAGE: 125V.
 7. MATING FORCE: 0.55KG (MAX) PER OPPOSING CONTACT PAIR
 8. WITHDRAWAL FORCE: 0.1KG (MIN) PER CONTACT PAIR
 9. MARK A&P

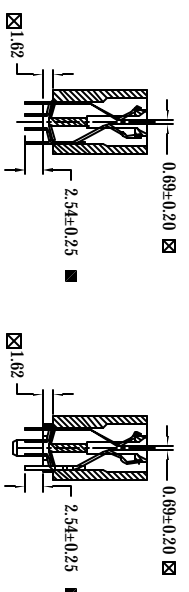

F
E
D
C
B
A

1 2 3 4 5 6 7 8

STN	DATE	REVISION	APPROVAL
05/02/00	INITIAL DRAWING		
08/22/01	REV A1-A1		

Sullins Electronics
Tel: 760 744-0125
www.SullinsElectronics.com
San Marcos, CA
Fax: 760 744-6081

CRITICAL	???	???	???	???	???	???	???	???	???
MAJOR									
MINOR									
REF									
TITLE	Universal ACP Pro 2X90	PART NO	TPWED00DKHN-TACP	CHECKED BY		DESIGNED BY		TOLERANCE 1/100	40.15
DRAWING NO	TACP 2 X 90	SCALE	2 X 90	SHEET	1 OF 1	REV	A1	UNLESS OTHERWISE SPECIFIED	40.15
UNITS	mm	SCALE	NTS	SHEET	1 OF 1	REV	A1	UNLESS OTHERWISE SPECIFIED	40.15
UNITS	in	SCALE	NTS	SHEET	1 OF 1	REV	A1	UNLESS OTHERWISE SPECIFIED	40.15
UNITS	mm	SCALE	NTS	SHEET	1 OF 1	REV	A1	UNLESS OTHERWISE SPECIFIED	40.15