


MATERIALS

- * Housing: P.P.S.(UL-94V-0)
- * Contact: Phosphor Bronze
- * Contact plating: Gold Flash in contact area; tin/lead on tails

SPECIFICATIONS

- * Operating Temperature: -40°C to +105°C
- * Contact current rating : 1 AMP
- * Contact resistance: 30 m ohms . Max.
- * Insulation resistance: 5000 M ohms. Min.
- * Dielectrical withstanding :500 AC for one minute
- * Retension Force : 40g Min.
- * Insertion Force : 130g Max.

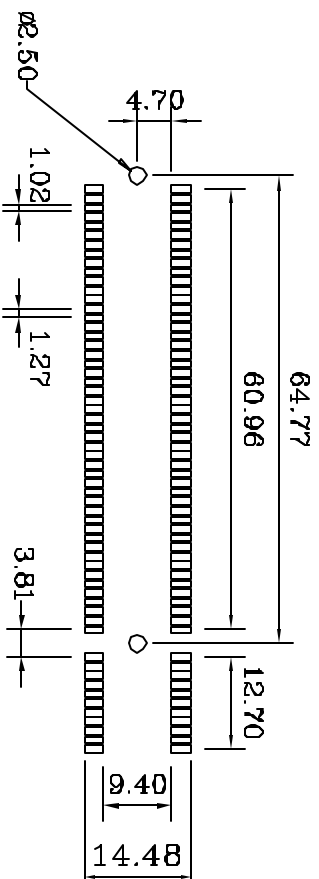

SMW PCI Connector		m/m
PART NUMBER		
NO.1	RPWB06ODKFR-T578	
NO.2		
NO.3		
NO.4	Rev A	PCB Layout

Sullins Electronics Corp.