


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD	LOC	DIST	ZONE	LTR	REVISIONS	DATE	APPD
23	BD	39		C	REDRAWN AND REV PER ECN BD4183	9-6-90	KZ

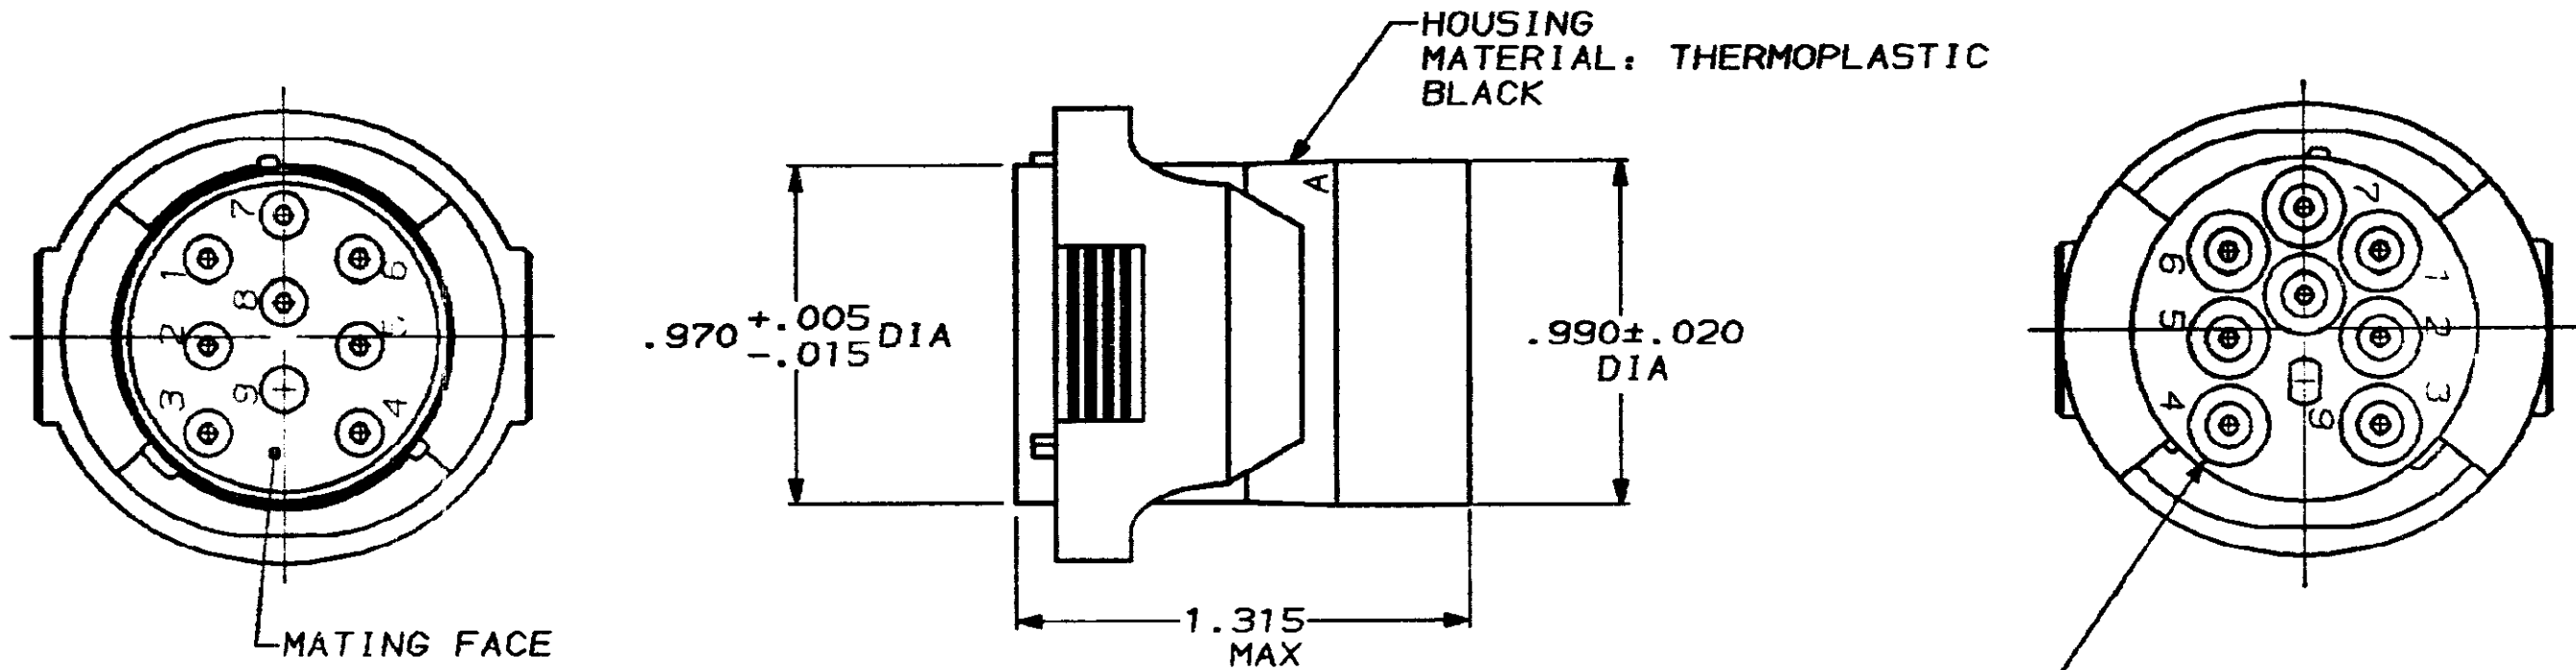

1. WIRE INSULATION SEALING RANGE: .070-.115 DIA.
2. MATES WITH 208677-1 OR 211068-1.
3. TOTAL LENGTH OF MATED CONNECTORS IS LESS THAN 2.50 INCHES.
4. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
5. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

208678-1
 PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 9-8-90 J. GALLUCCI BG	AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK J. Mullin 1-4-91 APPD K. Beavel 1-10-91			NAME PLUG, 8 POSITION, STANDARD ECONOSEAL CONNECTOR
MATERIAL SEE CALLOUT	APPD J. Ferguson 1/24/91	SIZE B	FSCM NO 00779	DRAWING NO 208678
FINISH -	APPLICATION SPEC -	SCALE 2:1	SHEET 1 OF 1	
WEIGHT -				

CUSTOMER DRAWING