
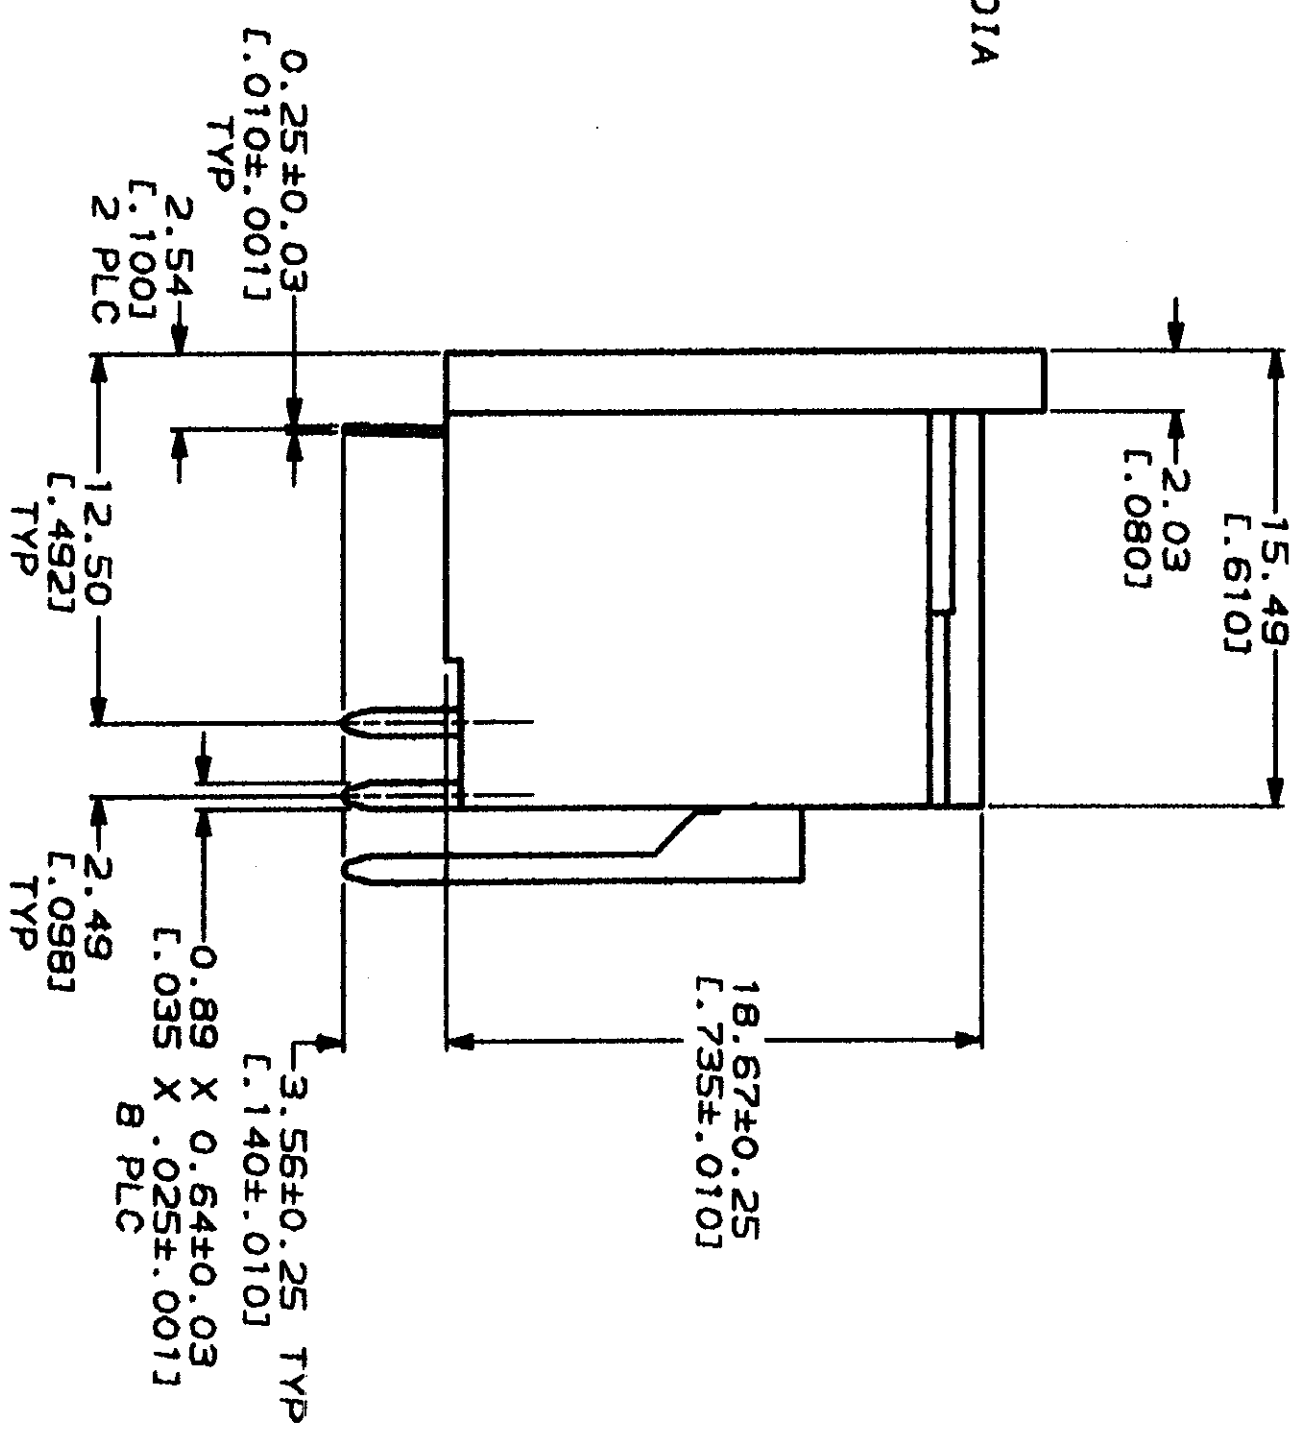


HOUSING

- 1 NYLON, UL 94V-0 RATED, BLACK.
- 2 .54µm [L.000100] MIN TIN-LEAD OVER 1.27µm [L.000050] MIN NICKEL.
- 3 TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
- 4 ACCEPTS #2 SELF-TAPPING SCREW, .250 LONG REF.
- 5 MATES WITH 8 POSITION SHIELDED DIN PLUG 212437-4.
- 6 BRASS PER ASTM B36.

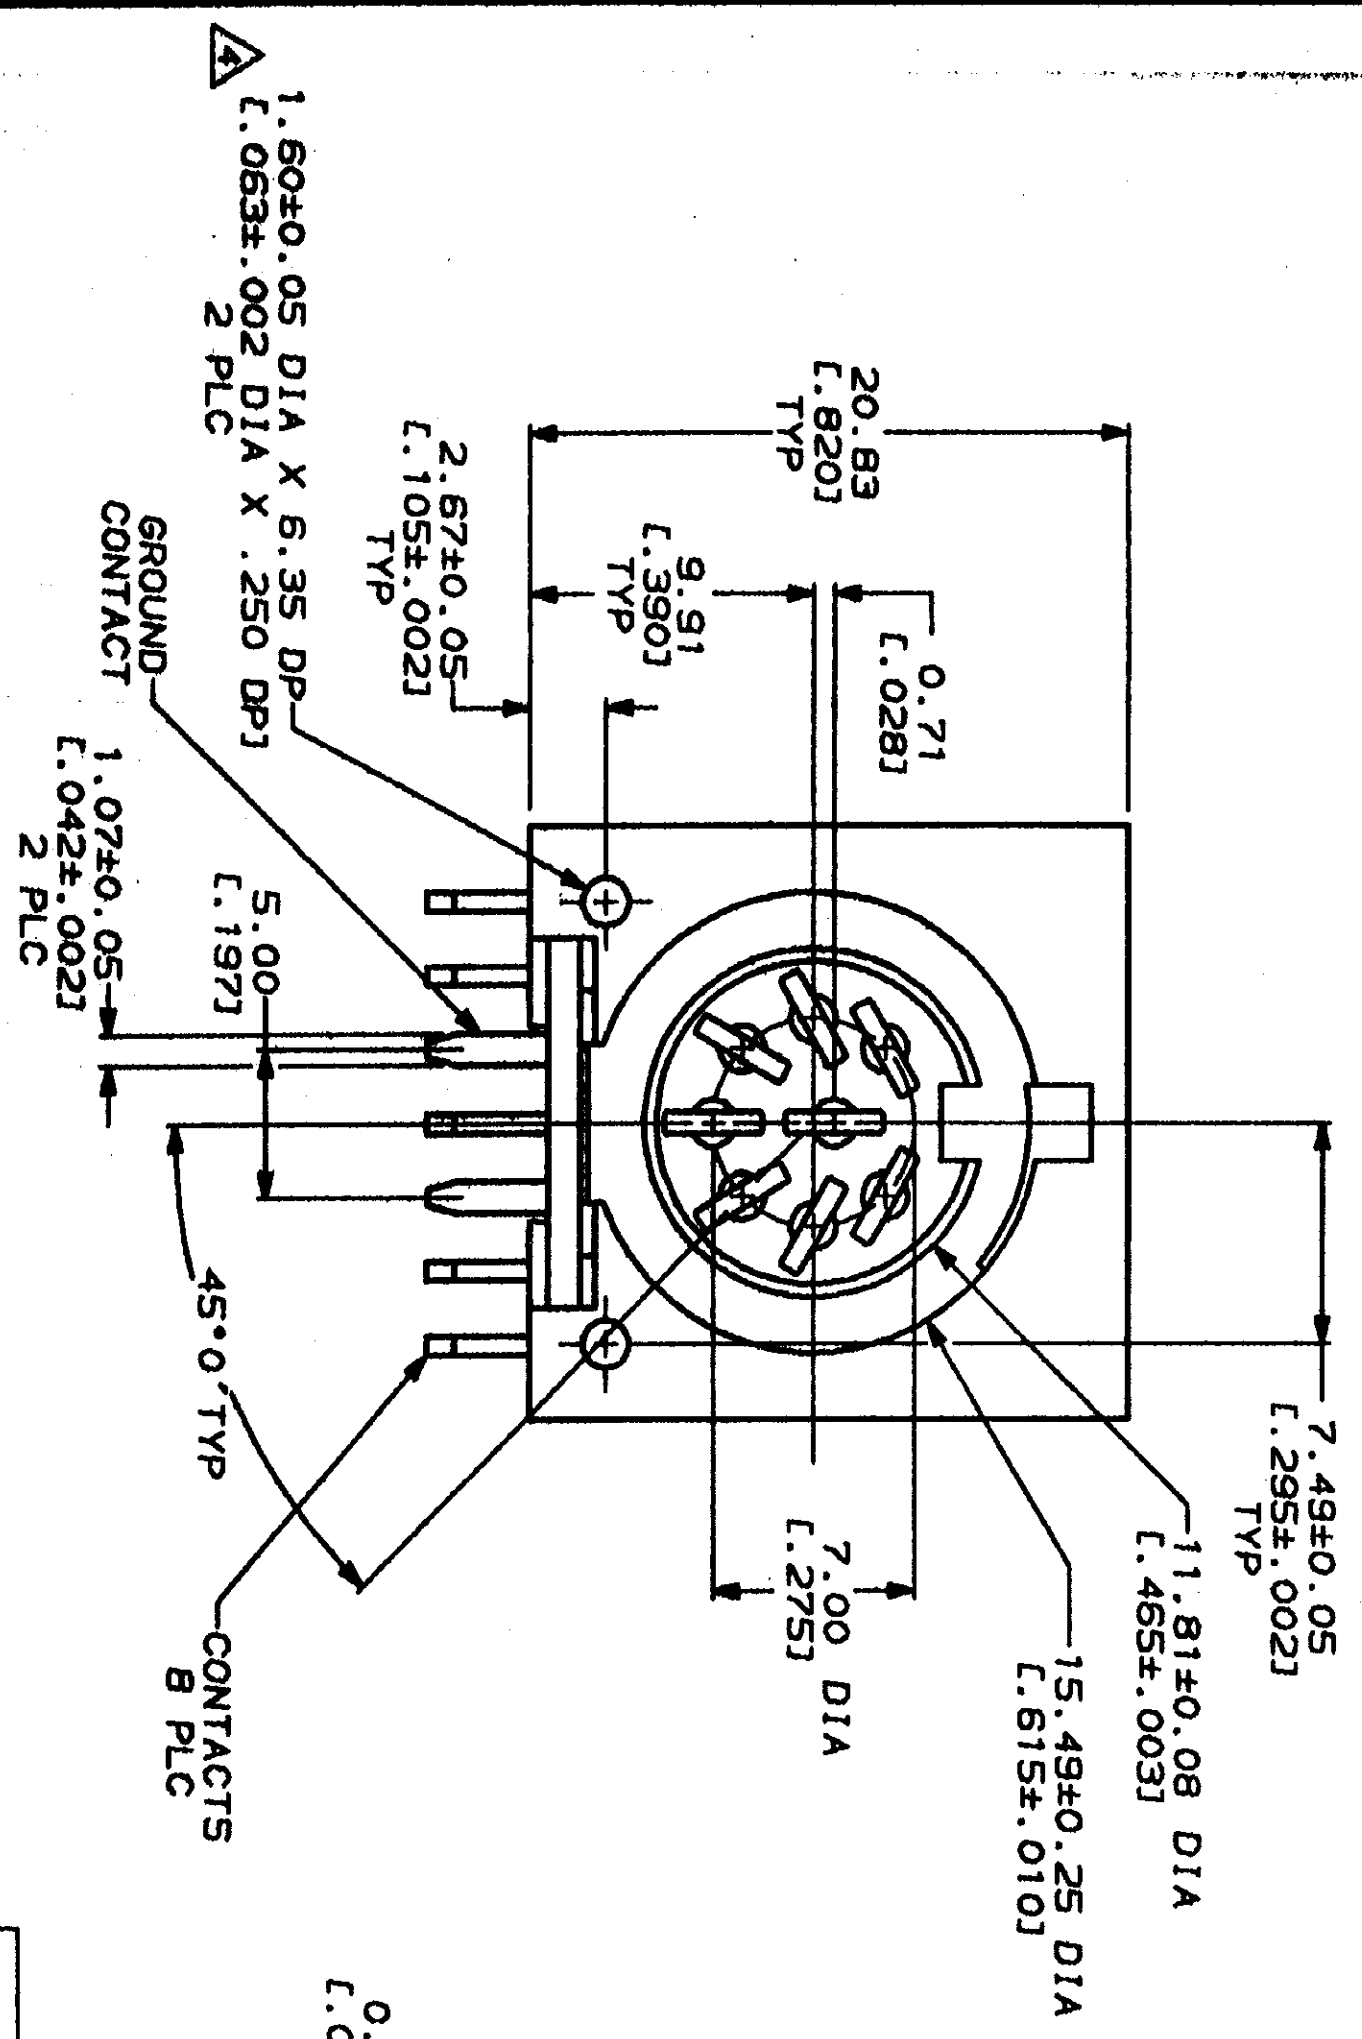

PART NUMBER  
211511-1

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MM (INCHES) TOLERANCES ON: 1. PLC DEC ±0.13(.005) 2. PLC DEC ±0.30		DR B/12/91 A. STUBBS	DATE 1/22/91	AWP AWP Incorporated Harrisburg, PA 17105-3608	
MATERIAL: NYLON, UL 94V-0 RATED, BLACK.		CHK: <i>Amell</i>	11-26-91	RECEPTACLE ASSY, RIGHT ANGLE, 8 POSITION, CIRCULAR DIN	
HOUSING, CONTACTS, GROUND CONTACT.		APPR: <i>J. P. Miller</i>	11-26-91	SIZE: CAGE CODE 00779 DRAWING NO 211511	
FINISH: CONTACTS, GROUND CONTACT.		PRODUCT SPEC: 108-10047	APPL. SPEC: 114-40025	SCALE: 4:1	
WEIGHT: -		SHEET: 1 OF 1		CUSTOMER DRAWING	

REV	DATE	BY	DESCRIPTION
1	11-26-91	J. P. Miller	REWORK