

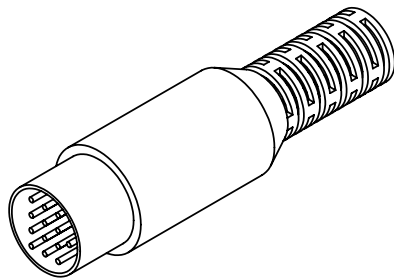



REV.	DESCRIPTION	DATE
A	NEW DRAWING	2/24/2006

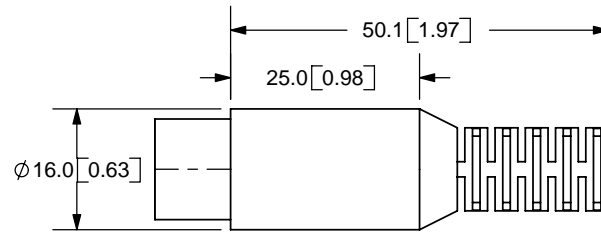

TOLERANCE:
X.X ±0.1mm
X.XX ±0.05mm

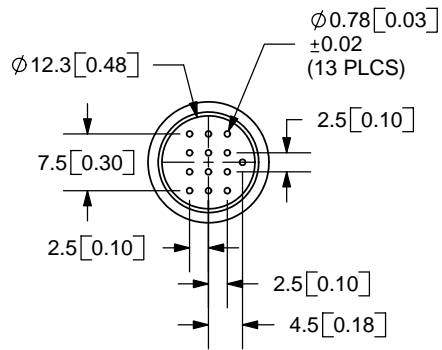

SPECIFICATIONS:
RATING: 100V DC @ 1A
CONTACT RESISTANCE: Pins-30m OHMS MAX; Shell-50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 1000A AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES



9615 SW Allen Blvd., Ste. 103
Beaverton, OR 97005
Phone: 503-643-4899
800-275-4899
Fax: 503-372-1266
Website: www.cui.com

	MATERIAL	PLATING	TITLE: IN-LINE PLUG	REV: A
PINS	Brass	Silver	PART NO. SD-130	UNITS: MM [INCHES]
SHELL	Steel	Nickel		
INSULATOR	PBT		DRAWN BY: ZRJ	APPROVED BY:
BOOT	PVC			

PC FILE NAME:
SD-130

COPYRIGHT 2006 BY CUI INC.