


LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E2		REDRAWN W/CHANGE	ECR-07-024571	24OCT07	DM YF

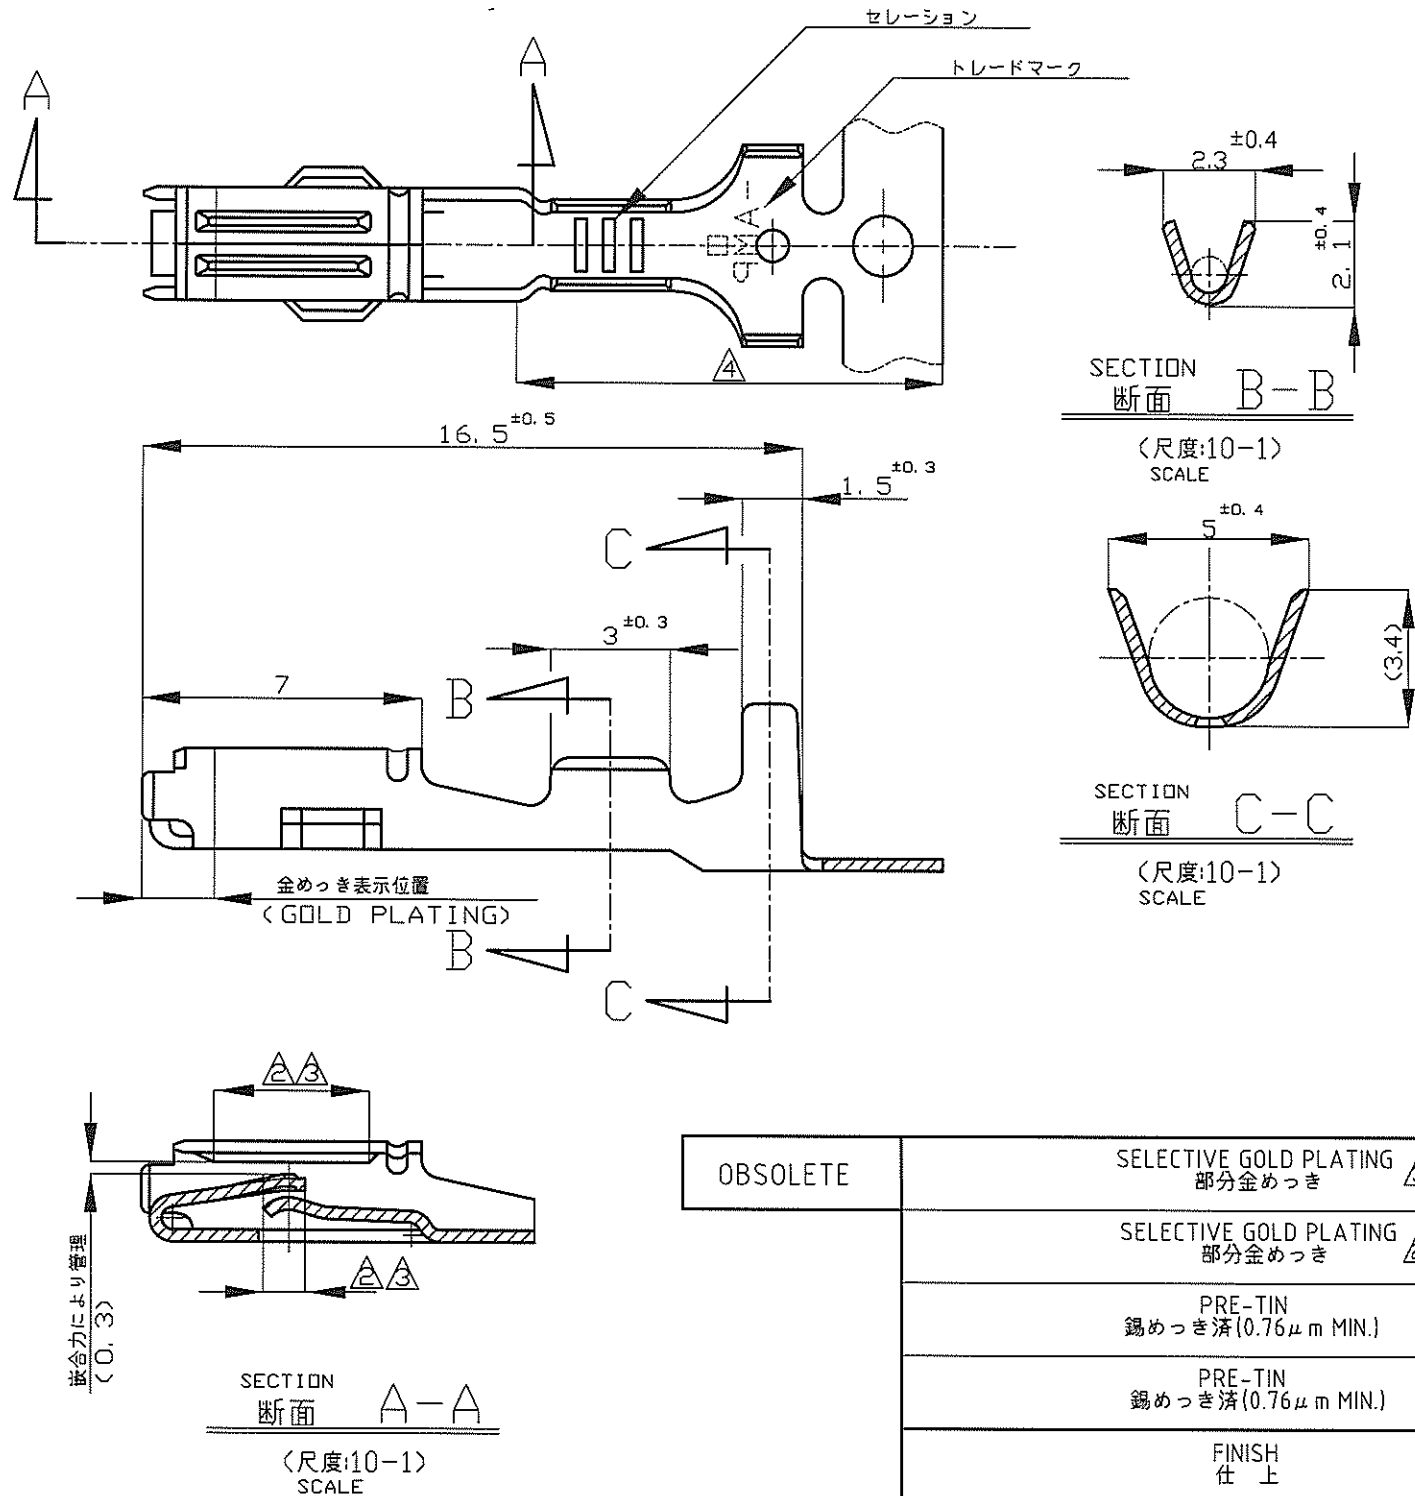

- 注
- 嵌合相手端子型番 ; 171631
  - 部分金めっき 0.38 μm 最小
  - 部分金めっき 1.27 μm 最小
  - 部分半田めっき 2.0 μm 最小
  - 一般公差 : 10以下 ±0.2 10以上30以下 ±0.25 30以上100以下 ±0.3 角度 ±3°

- NOTE ;
- TAB CONTACT ; 171631
  - SELECTIVE GOLD PLATING 0.38 μm MIN.
  - SELECTIVE GOLD 1.27 μm MIN.
  - SELECTIVE TIN-LEAD PLATING 2.0 μm MIN.
  - TOLERANCES UNLESS OTHERWISE SPECIFIED.  
10MAX : ±0.2 10-30 : ±0.25 30-100 : ±0.3 ANGLES : ±3°

OBSELETE	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-6
	SELECTIVE GOLD PLATING 部分金めっき	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-5
	PRE-TIN 錫めっき済 (0.76 μm MIN.)	PHOS-BRONZE t = 0.3 リン青銅 板厚 0.3	171630-2
	PRE-TIN 錫めっき済 (0.76 μm MIN.)	BRASS t = 0.3 黄銅 板厚 0.3	171630-1
	FINISH 仕上	MATERIAL 材料	PART NUMBER 型番

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN D.MATSUURA	24OCT07	Tyco Electronics Corporation Kawasaki, Japan
CHK T.KOHNO	24OCT07	
APVD Y.FUJIWARA	24OCT07	NAME 名称
PRODUCT SPEC 製品規格	108-5262	ECONOSEAL J MK-II CONN RECEPTACLE CONTACT
APPLICATION SPEC 取付適用規格	114-5082	
WEIGHT	0.35g	SIZE A3
MATERIAL 材料	SEE TABLE	CAGE CODE 00779
FINISH 仕上	SEE TABLE	DRAWING NO C-171630
CUSTOMER DRAWING		RESTRICTED TO -
SCALE 尺度 5:1		SHEET 1 OF 1
		REV E2

適合電線断面積 (WIRE RENG)	被覆外径 (INSULATION DIA)
AVS 0.2-0.5mm <sup>2</sup> (AWG24-20)	1.4-2.4mm φ