


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.



LOC	DIST	P	F	REVISIONS			
ZONE	LTR	DESCRIPTION	DATE	APPD			
CH	11						
		D	EC 0B20-0791-98	30/JUN/98	DAP		
		C	EC 0B20-0671-98	27/MAY/98	RNP		
		B	EC 0B20-0503-98	09/APR/98	RNP		
		A	ECN 95011203	01-12-95	CMS		

5 FINISH: 200 MICROINCHES MIN. SILVER OVER 40 MICROINCHES MIN. NICKEL.
6. ALL DIMENSIONS ARE REFERENCE ONLY.

- 1 MATERIAL: COPPER ALLOY
- 2 FINISH: 30 MICROINCHES MIN. GOLD OVER 50 MICROINCHES MIN. NICKEL.
- 3. WIRE BARREL WILL ACCEPT #8 AWG WIRE
- 4. MATES WITH AMP P/N 193990-X.

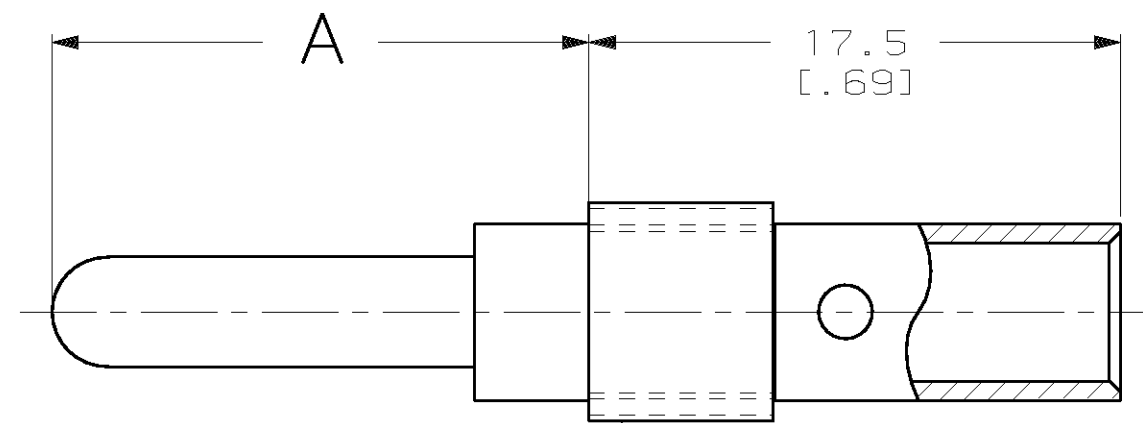

RETENTION CLIP
MATERIAL: STAINLESS STEEL

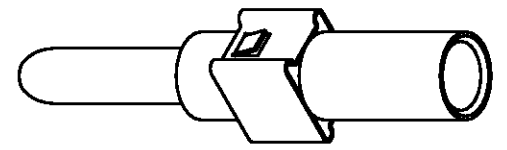

	5	15.7 [.62]	193991-4
	5	25.4 [1.00]	193991-3
OBSOLETE	2	15.7 [.62]	193991-2
OBSOLETE	2	25.4 [1.00]	193991-1

FINISH A PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 04-13-94 D.A.P.	AMP AMP Incorporated Harrisburg, PA 17105-3608		
	CHK -			
MATERIAL 1	APPD -	NAME PIN ASSEMBLY, TYPE XII HIGH CURRENT #8 AWG		
	APPD -			
FINISH 2 5	PRODUCT SPEC -	SIZE B	CAGE CODE 00779	DRAWING NO C-193991
	APPLICATION SPEC -	SCALE	SHEET	1 OF 1
	WEIGHT -			

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.