


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		F	0G3B-0317-03	24APR03	TK GS

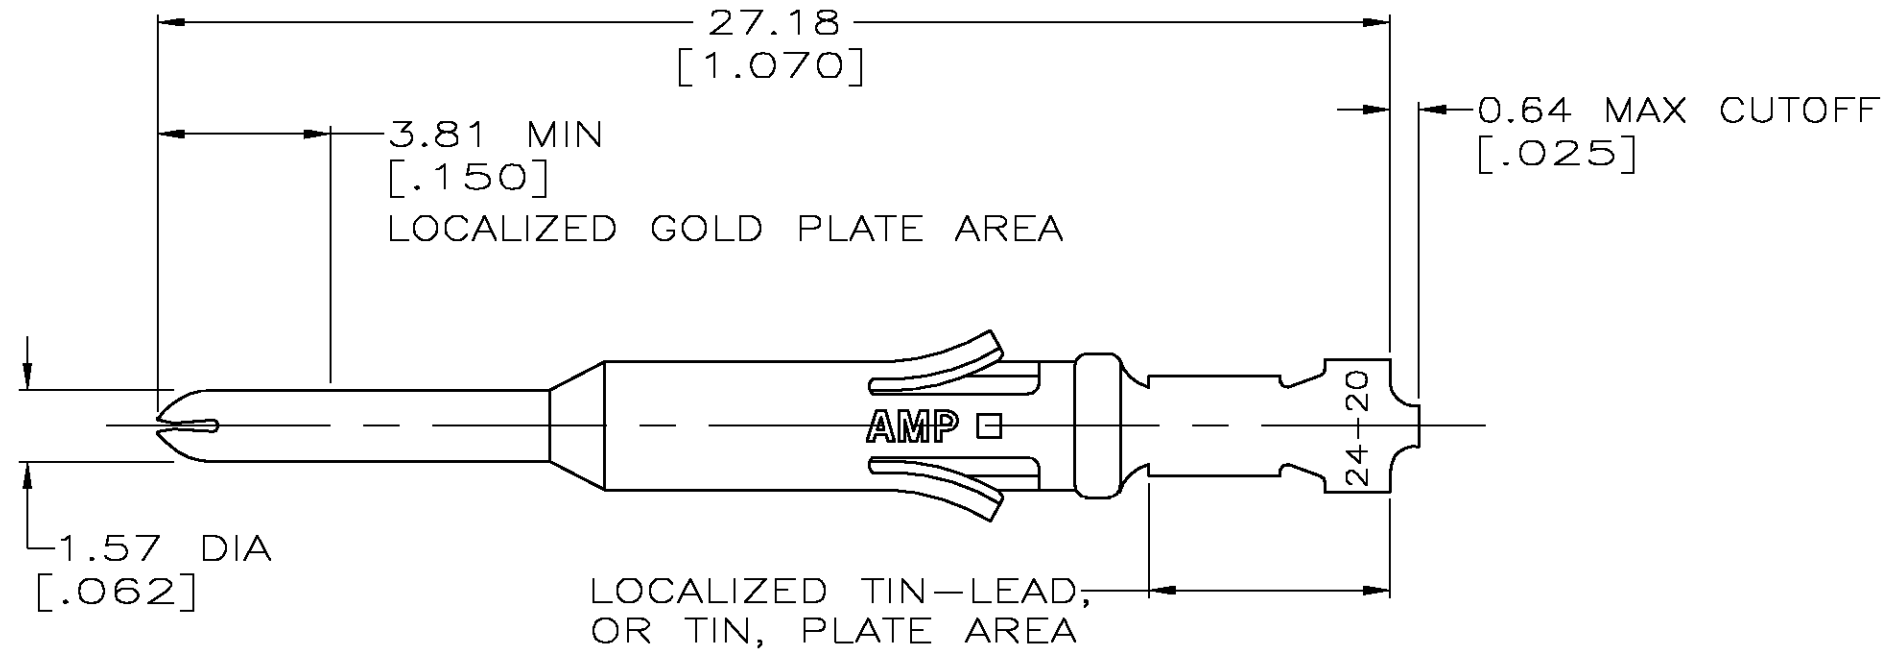

1. WIRE RANGE 24-20 AWG.
2. INSULATION RANGE 1.02-2.03 [.040-.080] DIA.
- ③ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27 μm [.000050] MIN NICKEL.
- ④ TIN PLATED.
- ⑤ GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
- ⑥ 0.76 μm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27 μm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27 μm [.000050] MIN NICKEL.

1-66583-0	⑥	66593-4
66583-4	③	66593-2
66583-2	④	66593-1
STRIP REF	FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY 06/15/94	Tyco Electronics Corporation Harrisburg, Pa		
DIMENSIONS: INCHES		CHK R.STONE 06/22/94	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G.STEINHAUER 06/27/03	CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE		
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
MATERIAL BRS PER MIL-C-50		FINISH SEE TABLE	WEIGHT	A3	00779 C-66593
CUSTOMER DRAWING			RESTRICTED TO	SCALE	SHEET
				6:1	1 OF 1
					REV F