
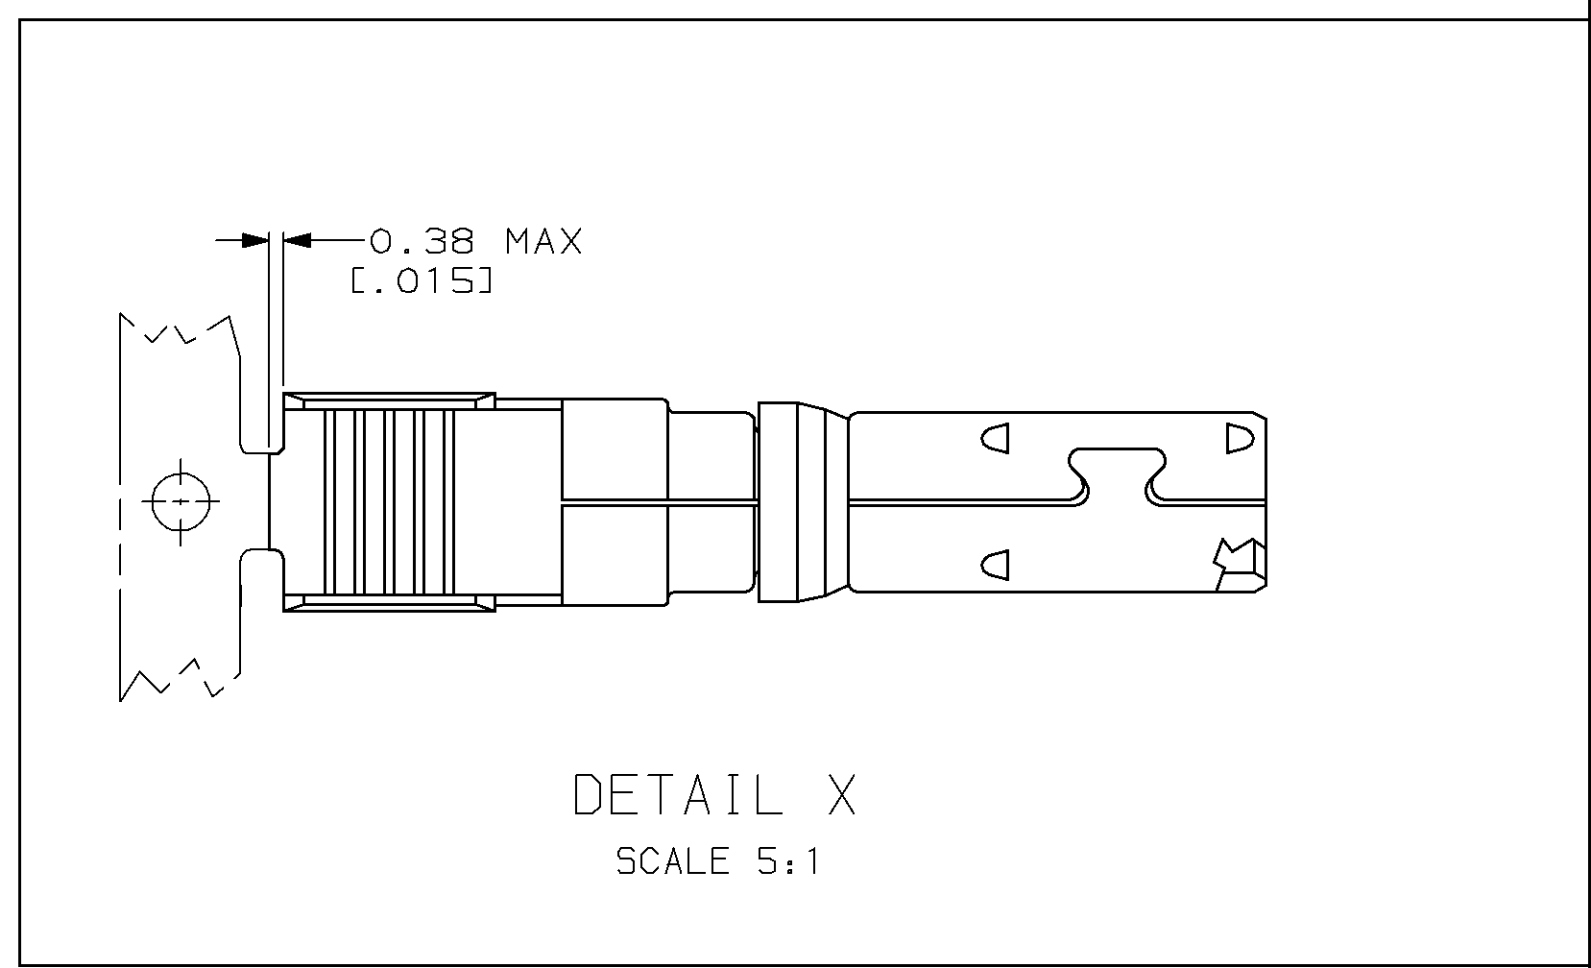
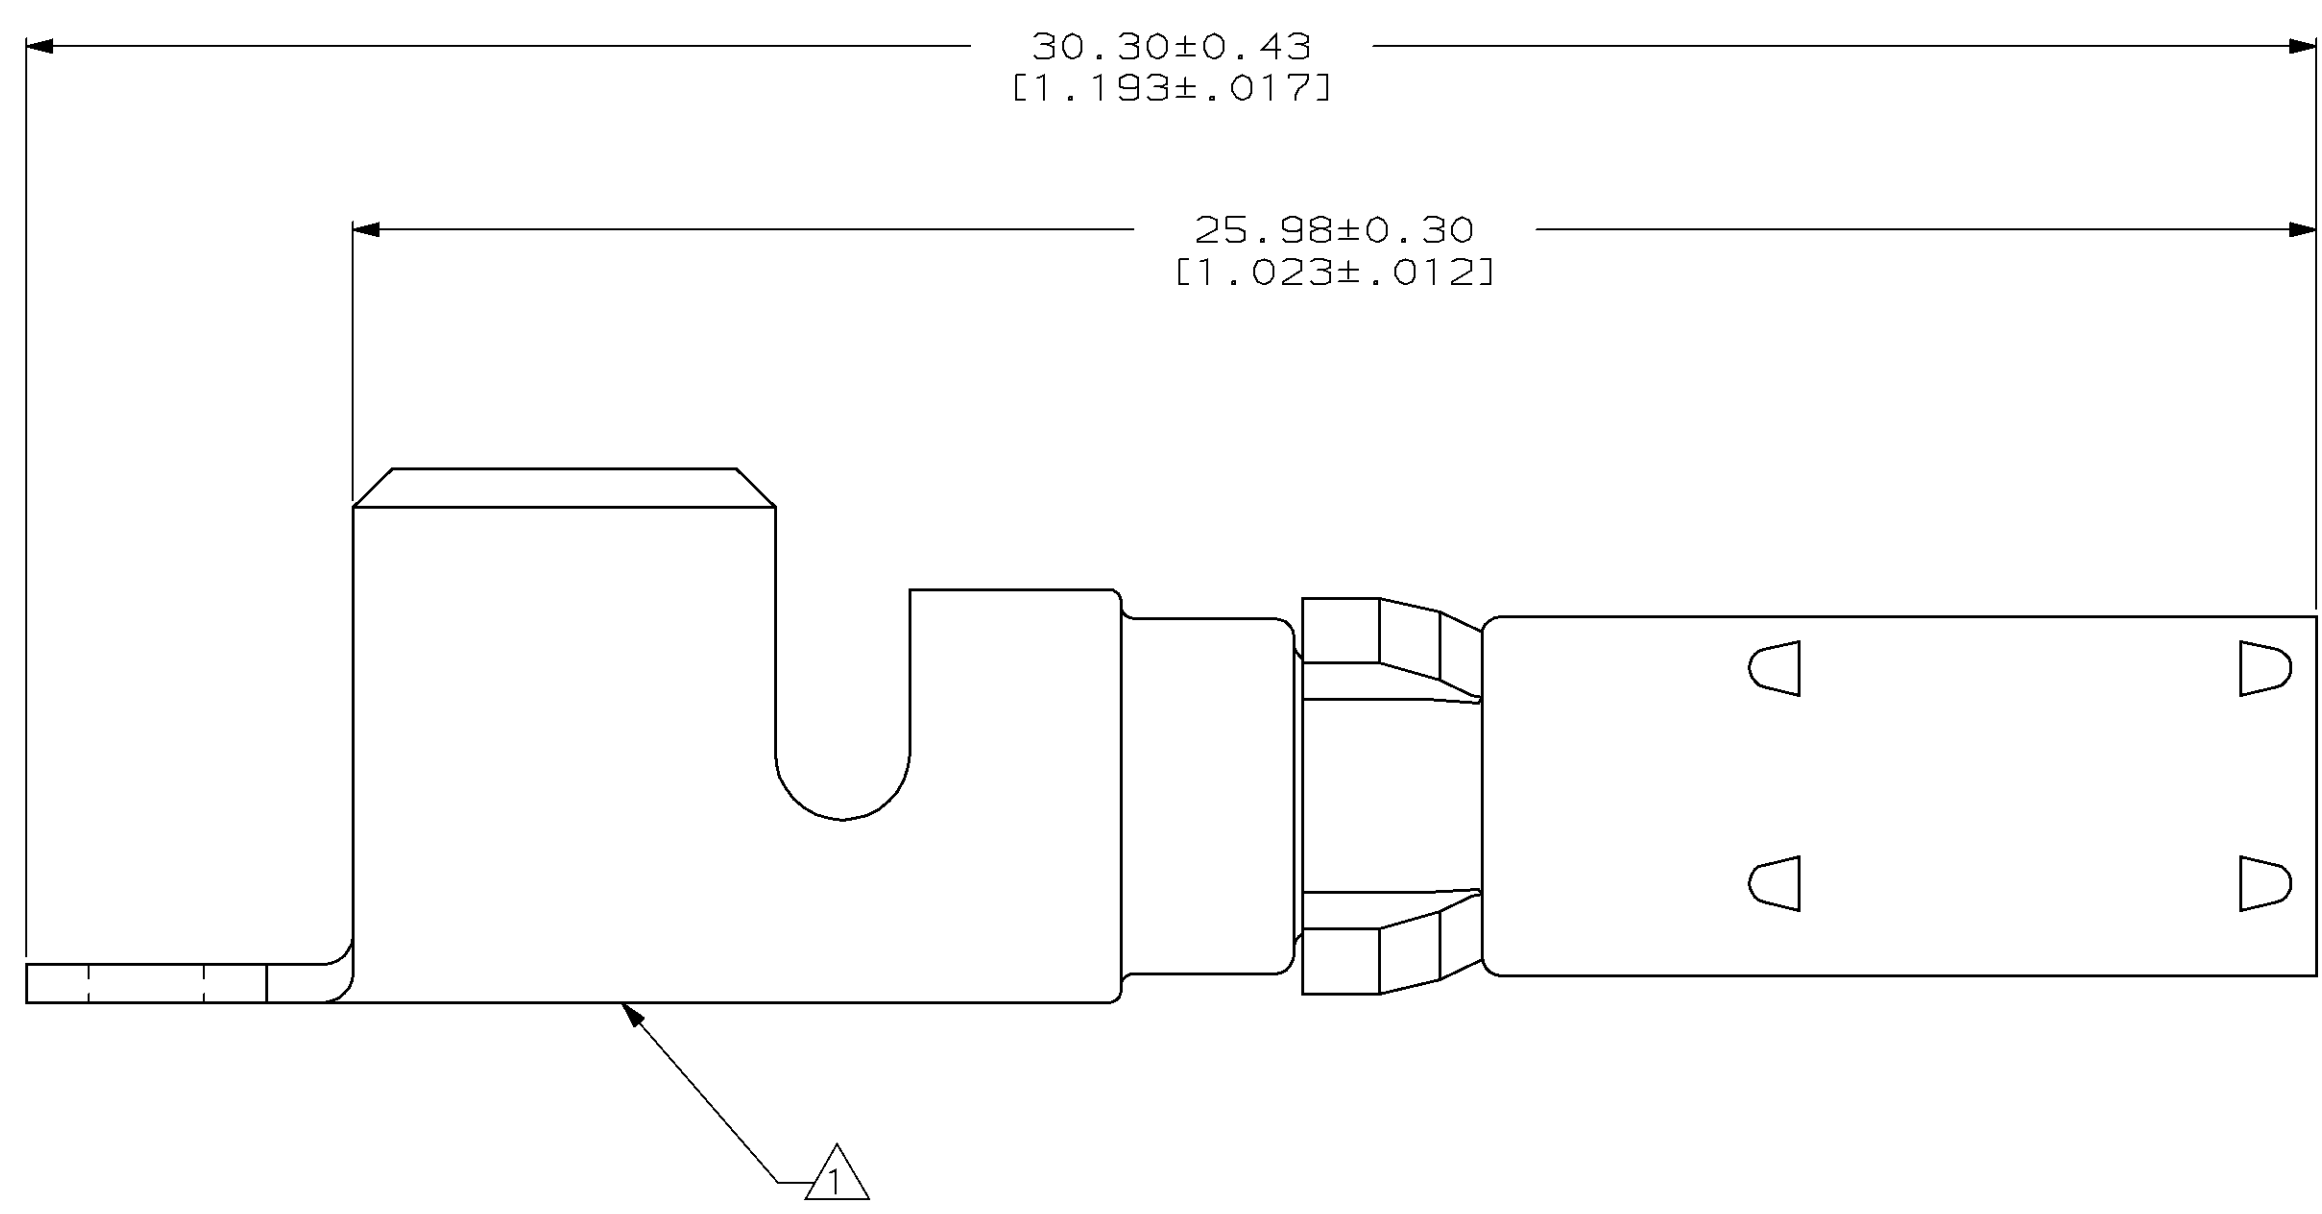


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVD		
0		RLSE PER NPR 5498 WAS 95-5019-8	21 MAR 96	-	-		
A		ADDED -1, -3 PER EC 0320-73-97	21 MAR 97	CO	AF		
B		REV PER EC 0320-399-97	22 JAN 98	MB	RW		

- 1 WIRE SIZE AND AMP LOGO APPEAR ON OUTSIDE OF WIRE BARREL.
- 2 SOCKET CONTACT: 0.38μm [0.00015] MIN GOLD PER MIL-G-45204 ON CONTACT MATING END, GOLD FLASH ON REMAINDER, ALL OVER 1.27μm [0.00050] MIN NICKEL PER QQ-N-390.
 CONTACT STRIP: 0.76μm [0.00030] MIN GOLD PER MIL-G-45204 OVER 1.02μm [0.00040] MIN NICKEL PER QQ-N-390.
 RETENTION CLIP: 2.54μm [0.00100] MIN NICKEL PER QQ-N-290.
- 3 RETENTION CLIP: PHOSPHOR BRONZE PER QQ-B-750.
 SOCKET CONTACT: COPPER PER QQ-C-576.
 CONTACT STRIP: BERYLLIUM COPPER PER QQ-C-533.
- 4 SOCKET CONTACT: 1.27μm [0.00050] MIN SILVER PER QQ-S-365, ALL OVER 1.27μm [0.00050] MIN NICKEL PER QQ-N-290.
 CONTACT STRIP: 5.08μm [0.00200] MIN SILVER PER QQ-S-365, ALL OVER 1.02 μm [0.00040] MIN NICKEL PER QQ-N-290.
 RETENTION CLIP: 2.54μm [0.00100] MIN NICKEL PER QQ-N-290.

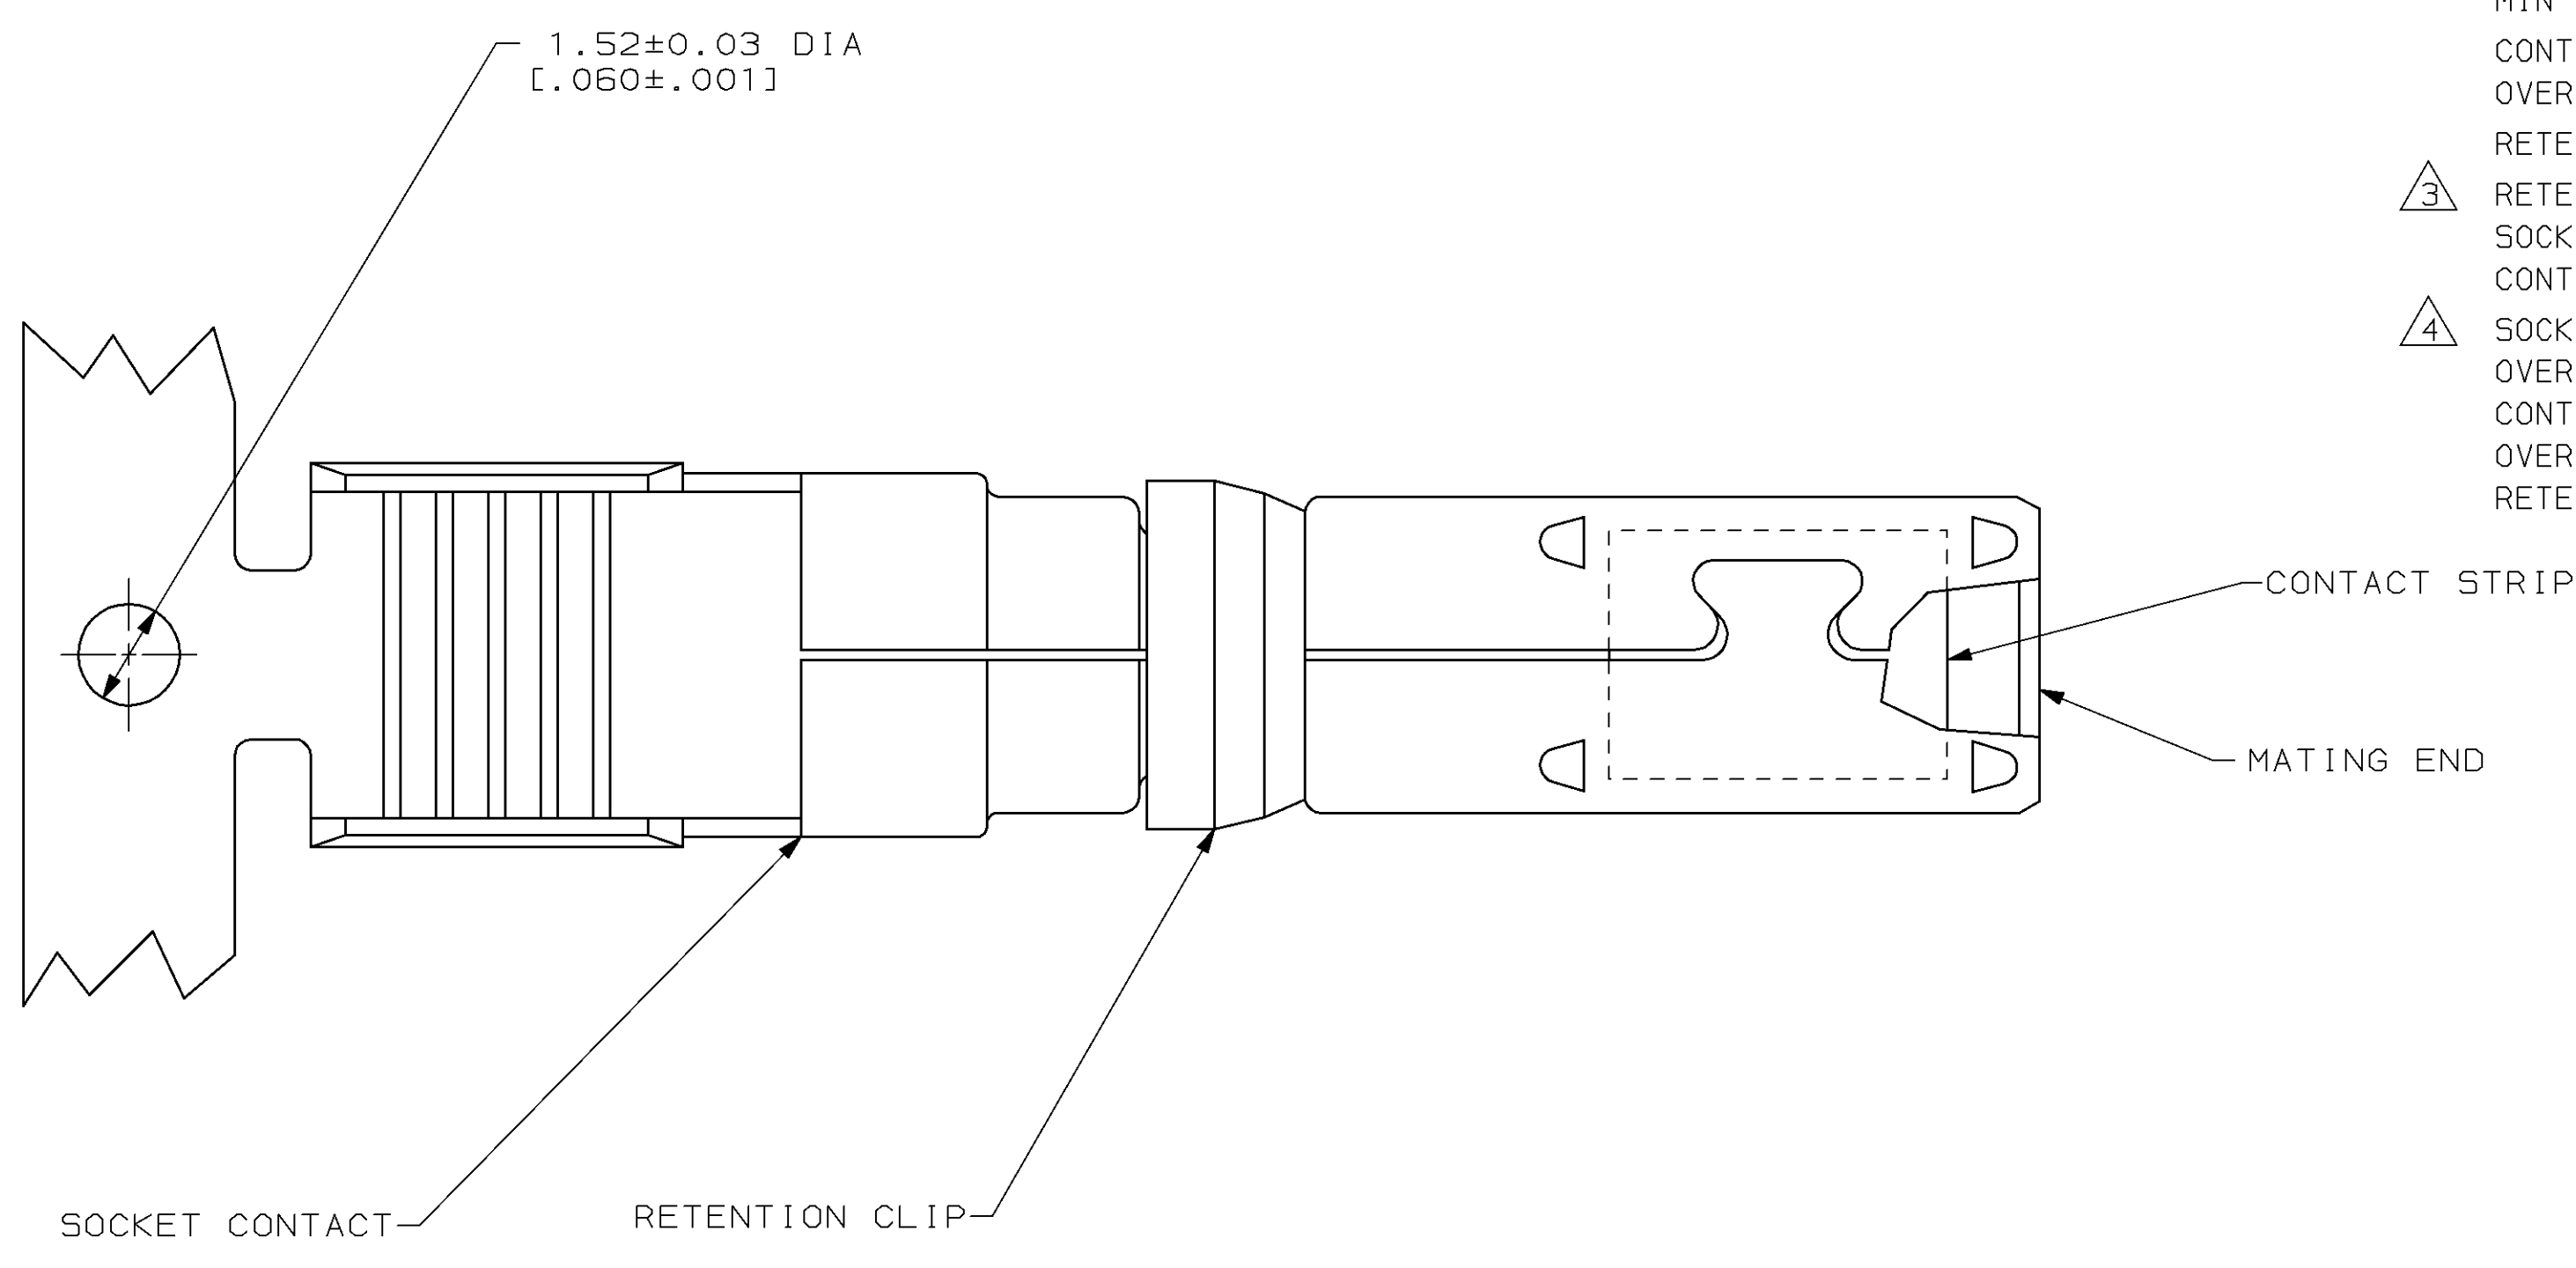

2	4	DETAIL X	213843-4
2	4	DETAIL X	213843-3
		-	213843-2
		-	213843-1
FINISH		LOOSE PIECE	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		FINISH		MATERIAL		NOMENCLATURE		DRAWING NO	
0 PLC	±	0 PLC	±	0	±	SEE TABLE		AMP	AMP Incorporated	21 MAR 96	
1 PLC	±	1 PLC	±	1	±			C. OBERMAN	Harrisburg, PA 17105-3508	25 MAR 96	
2 PLC	±	2 PLC	±	2	±			R. STONE			
3 PLC	±	3 PLC	±	3	±			G. STEINHAUER			
4 PLC	±	4 PLC	±	4	±						
ANGLES	±	ANGLES	±		±						
MATERIAL		FINISH		WEIGHT		CUSTOMER DRAWING		NAME		DRAWING NO	
								SOCKET CONTACT ASSEMBLY, 8-10 AWG, POWERBAND, METRIMATE		A1 00779 C-213843	
								SIZE		SCALE	
								A1		10:1	
								CAGE CODE		SHEET	
								00779		1 OF 1	
								DRAWING NO		REV	
								C-213843		B	