PART NO.	ENG. NO.
02-09-2103	1190-(P901)L
02-09-2101	1190-(P901)
02-09-6110	1190-(591)L
02-09-6101	1190-(591)
02-09-6106	1190-(550)L
02-09-6100	1190-(550)

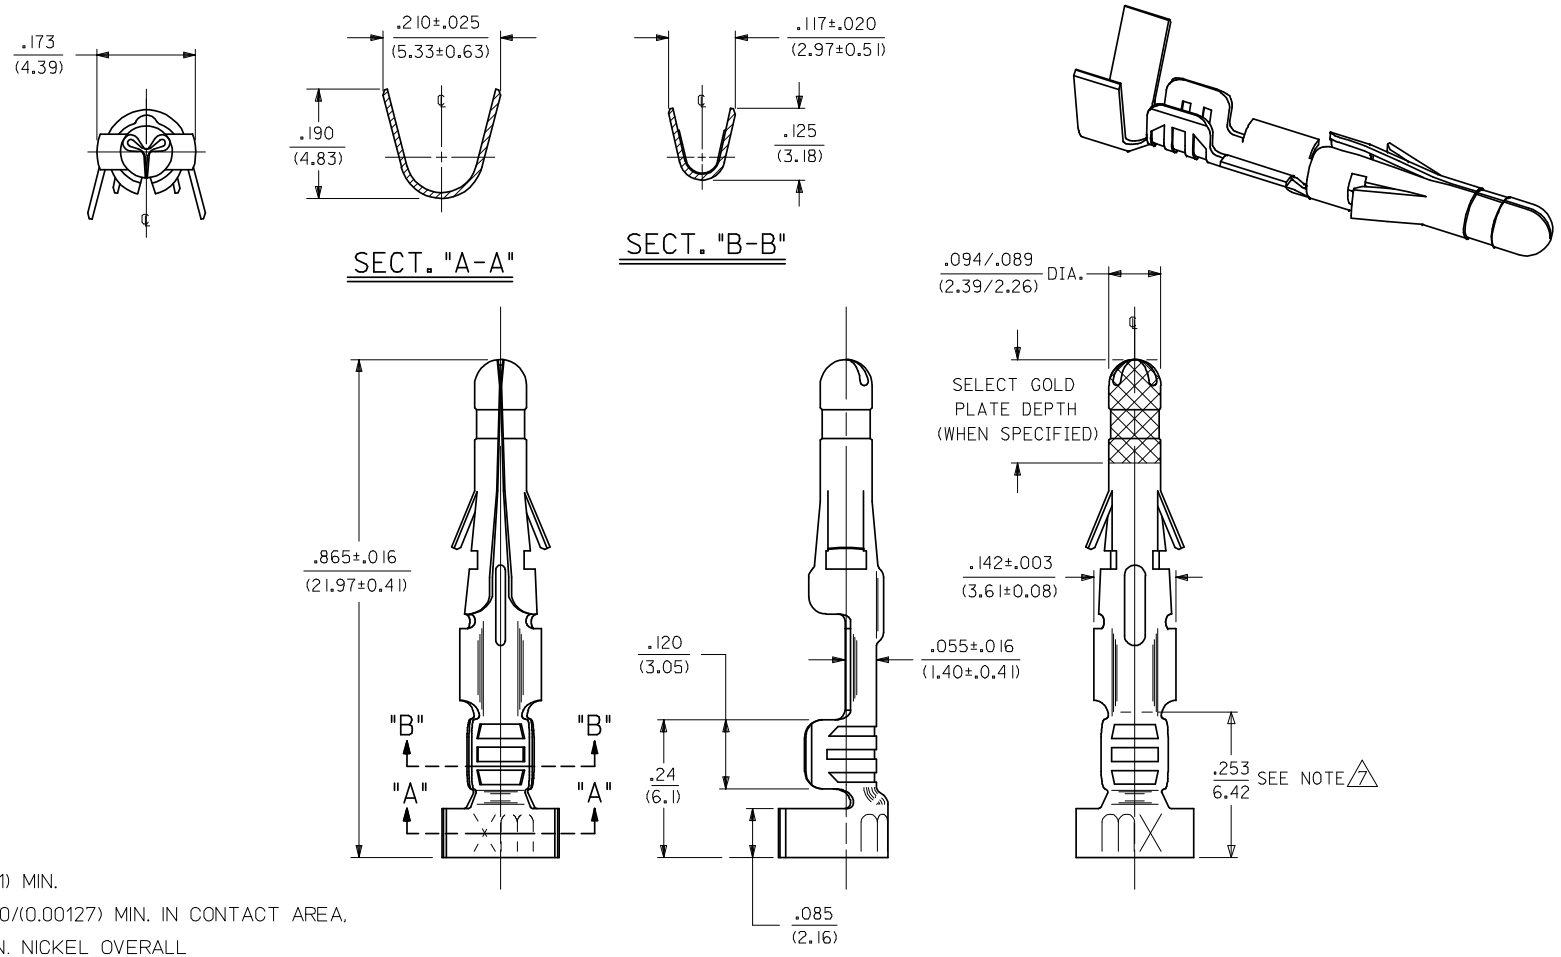

NOTES:

1) MATERIAL:
   CARTRIDGE BRASS
2) FINISH CODES:
   901 HOT TIN DIP .000020/(0.00051) MIN.
   591 SELECT GOLD PLATE .000050/(0.00127) MIN. IN CONTACT AREA,
   OVER .000050/(0.00127) MIN. NICKEL OVERALL
   WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
   550 SELECT GOLD PLATE .000015/(0.00038) MIN. IN CONTACT AREA,
   OVER .000030/(0.00076) MIN. NICKEL OVERALL
   WITH .000010/(0.00025) MAX. GOLD FLASH OVERALL.
3) PRODUCT SPECIFICATION: PS-43660-9999
4) PACKAGING SPECIFICATION: PK-1190-001
5) INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED
   INTO .093 SERIES HOUSING.
6) RETENTION: 20 LBS. MIN. FROM HOUSING.
7) DIMENSION FROM THE END OF THE TERMINAL TO THE END OF THE BRUSH
   ON THE WIRE CRIMPED INTO THE TERMINAL.
8) TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL
   ACCEPT 14 THRU 20 AWG WIRE.

LEGEND

1190-(****)*

- FORM: BLANK=CHAIN, L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE



CHAIN FORM
FULL SCALE

ADD PK SPEC 2008/08/15
EC NO: UCP2009-0180 2008/08/22
DRWN:GAVERILL
CH'KD:AELHAG
APPR:FSMITH
DESCRIPTION
BS1
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.13	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 6:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	GEP
DATE	10/26/87
CHECKED BY	RW
DATE	10/26/87
APPROVED BY	RAS
DATE	10/26/87
MATERIAL NO.	SEE CHART
DOCUMENT NO.	SD-1190-*
SHEET NO.	1 OF 1

TITLE: CRIMP TERMINAL, MALE .093/(2.36) DIA. FOR 14 THRU 20 AWG. WIRE

MOLEX INCORPORATED

SIZE C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION